


DOT P

Omar Carraglia - Davide Groppi / 2015

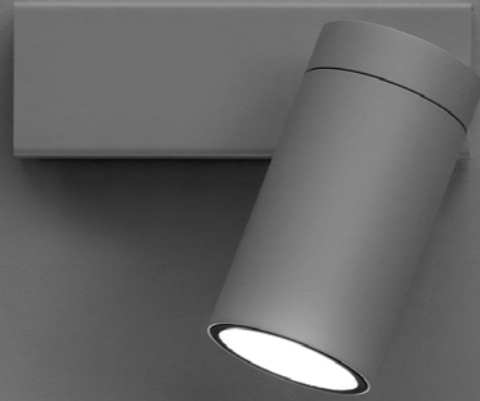

A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Luminaire available also in ENDLESS version.

Elemento di luce.

Un apparecchio progettato per utilizzare moduli a LED in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi. Apparecchio illuminante disponibile anche nella versione ENDLESS.


DOT P

Omar Carraglia - Davide Groppi / 2015

Wall-Ceiling / Direct / Indoor

Material Metal
Finish **.03** Matt White **.04** Matt Black

Note Wall luminaire. Adjustable in all directions. DOT P DE and DOT P DE 51: dual emission versions. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. *Apparecchio illuminante da parete. Orientabile in tutte le direzioni. DOT P DE e DOT P DE 51: versioni a doppia emissione. DOT P ENDLESS e DOT P ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS.*




DOT P

13W
 100-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 DALI

CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A2340300.27.01
 1A2340300.30.01
 1A2340400.27.01
 1A2340400.30.01



DOT P

13W
 100-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 PUSH


CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH

1A2340300.27.04
 1A2340300.30.04
 1A2340400.27.04
 1A2340400.30.04

DOT P

Omar Carraglia - Davide Groppi / 2015




DOT P 51

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included

CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A2490300.00.00
 1A2490400.00.00




DOT P ENDLESS

ENDLESS version only
 13W - 0,34A
 48V DC
 2700K / 3000K
 CRI >97
 Driver not included
 See page ENDLESS

CE IP20 E

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A2340300.27.40
 1A2340300.30.40
 1A2340400.27.40
 1A2340400.30.40




DOT P ENDLESS CASAMBI

ENDLESS version only
 15,5W - 0,4A
 48V DC
 2700K / 3000K
 CRI >97
 Driver not included
 See page ENDLESS

CE IP20 E A

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A2340300.27.41
 1A2340300.30.41
 1A2340400.27.41
 1A2340400.30.41




DOT P DE

Dual emission
 29W
 220-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 DALI
 CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A4900300.27.01
 1A4900300.30.01
 1A4900400.27.01
 1A4900400.30.01



DOT P DE 51

Dual emission
 Max 2x10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A3810300.00.00
 1A3810400.00.00

Compulsory accessories / Accessori obbligatori


Other accessories / Altri accessori




Lens / Lente			Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 1966lm	DOT P DE	
Beam - 24°	3000K - CRI >97 - 2076lm		
	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 1886lm	DOT P DE	
	3000K - CRI >97 - 1992lm		
	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
Beam - 50°	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 1910lm	DOT P DE	
	3000K - CRI >97 - 2010lm		
	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 1930lm	DOT P DE	
	3000K - CRI >97 - 2032lm		

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape				Not included
		DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080400.01.00	




Elliptical filter / Filtro ellittico				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.02.00	



Blue filter / Filtro blu				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.03.00	



Red filter / Filtro rosso				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.04.00	



Yellow filter / Filtro giallo				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.05.00	

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y0330500




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580210




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580010


Other accessories / Altri accessori



Darklight			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040



25° beam filter / Filtro fascio 25°			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020



36° beam filter / Filtro fascio 36°			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030