

davide groppi

HANDBOOK 2024 - CCC

INDEX

WIRELESS	11	MORSETTO P	161
35MM	13	RAIL	165
BUGIA	17	REFLEX	169
PoPuP	21		
POST PRANDIUM	25		
TeTaTeT	29	CEILING	173
TeTaTeT Flûte	33	ASINTOTO	175
VIS À VIS	37		
		RECESSED	179
TABLE	41	DOT R	181
ANIMA	43	MIRA R	185
CALVINO	47	NULLA	189
FM	51		
MOON T	55		
MORSETTO	59	SYSTEMS	195
PIGRECO	63	FLASH	197
		INFINITO	213
		OHM	225
		UTOPIA	235
FLOOR	67		
MASAI	69		
MOON F	73	TRACKS - PROFILES	239
ORIGINE	77	BINARIO TRIFASE	241
SAMPEI	81		
		OUTDOOR	249
SUSPENSION	85	BELLADINOTTE	251
CATHODE	87	BUBKA	255
LOUIS XIV	91	BUBKA BOLLARD	259
MAGIA	95	GRILLO	263
MISS	105	IMU	267
MOON	109	NEURO OUTDOOR	271
NEURO	115	NUIT	275
REFLEX S	119	ORIGINE OUTDOOR	279
SHANGHAI	123	Q²	283
SIMBIOSI	127	SAMPEI 440 OUTDOOR	287
SOTTILE	131		
SOTTOSOPRA	135		
		WALL	139
		DOT P	141
		EDISON'S NIGHTMARE	145
		FILM	149
		MIRA	153
		MIRA MAGNETIC	157
		BULBS	291
		DRIVERS	292
		COMMON ACCESSORIES	295
		SUSPENSION FIXING KIT	296

CODE SYSTEM

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY					FINISH		INTERNAL USE ONLY		-	COLOUR TEMPERATURE		-	ELECTRIFICATION	

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox
4	1	Stainless Brushed Brass

Colour temperature

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700 / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

Electrification

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

General data on the product

Mounting - Lighting - Use - Material - Finish - Note

Versions specifications

Technical data - Certifications - Codes

Compulsory and optional accessories




Accessories finishes and specifications - Codes

Reference version

MOON Davide Groppi / 2005



Suspension / Diffuse / Indoor
 Material Japanese Paper - PE
 Finish .00 Standard

Note
 Shade with japanese paper texture luminaire - 304 Stainless steel suspension cables - White cable.
 Apparecchio con paralume con texture in carta giapponese - Rosone bianco - Cavo di sospensione in acciaio INOX 304 - Cavo bianco.



	MOON 60 Max 15W - E27 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	A2820000.00.00
	MOON 60 DE Max 15W - E27 + Max 10W - GU10 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	A2830000.00.00
	MOON 80 Max 15W - E27 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	A2840000.00.00

2


Davide Groppi / 2005 **MOON**

	MOON 120 Max 2x25W - E27 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	A2850000.00.00
	MOON 200 Max 4x25W - E27 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	A2860000.00.00

Optional accessories / Accessori opzionali
 Installation kit / Kit installazione

	Sloped rose fixing kit / Kit fissaggio rosone inclinato Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00	Not included
	Sloped ceiling fixing kit / Kit fissaggio soffitto inclinato Nickel plated - 1 Piece	MOON 120	1A0510000.00.00	Not included

Bulbs / Lampadine

	LED - GU10 - PAR16 / 220-240V - 5.5W - 25° - 3000K - 375lm - CRI 97 - Energy Efficiency G - Dimmable	MOON 60 DE	50330500	Not included
---	--	------------	----------	--------------

3

PICTOGRAPHY



Class II appliance: appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



Class III appliance: appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.

IPXX

Degree of protection against access of foreign bodies, dust and water.



Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the appliance to the closest lighting object.

CRI

Color Rendering Index: the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.

lm

The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS system at 48V DC.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.




Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR' <19).

WIRELESS

35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Those dear old slides. Nobody pays any attention to them anymore.
It's the smallest lamp in our collection.
It's an idea, a thought, a pendant, something you can wear.
The pulsating light and the images you choose to display on it
make 35MM unique and exceptional.

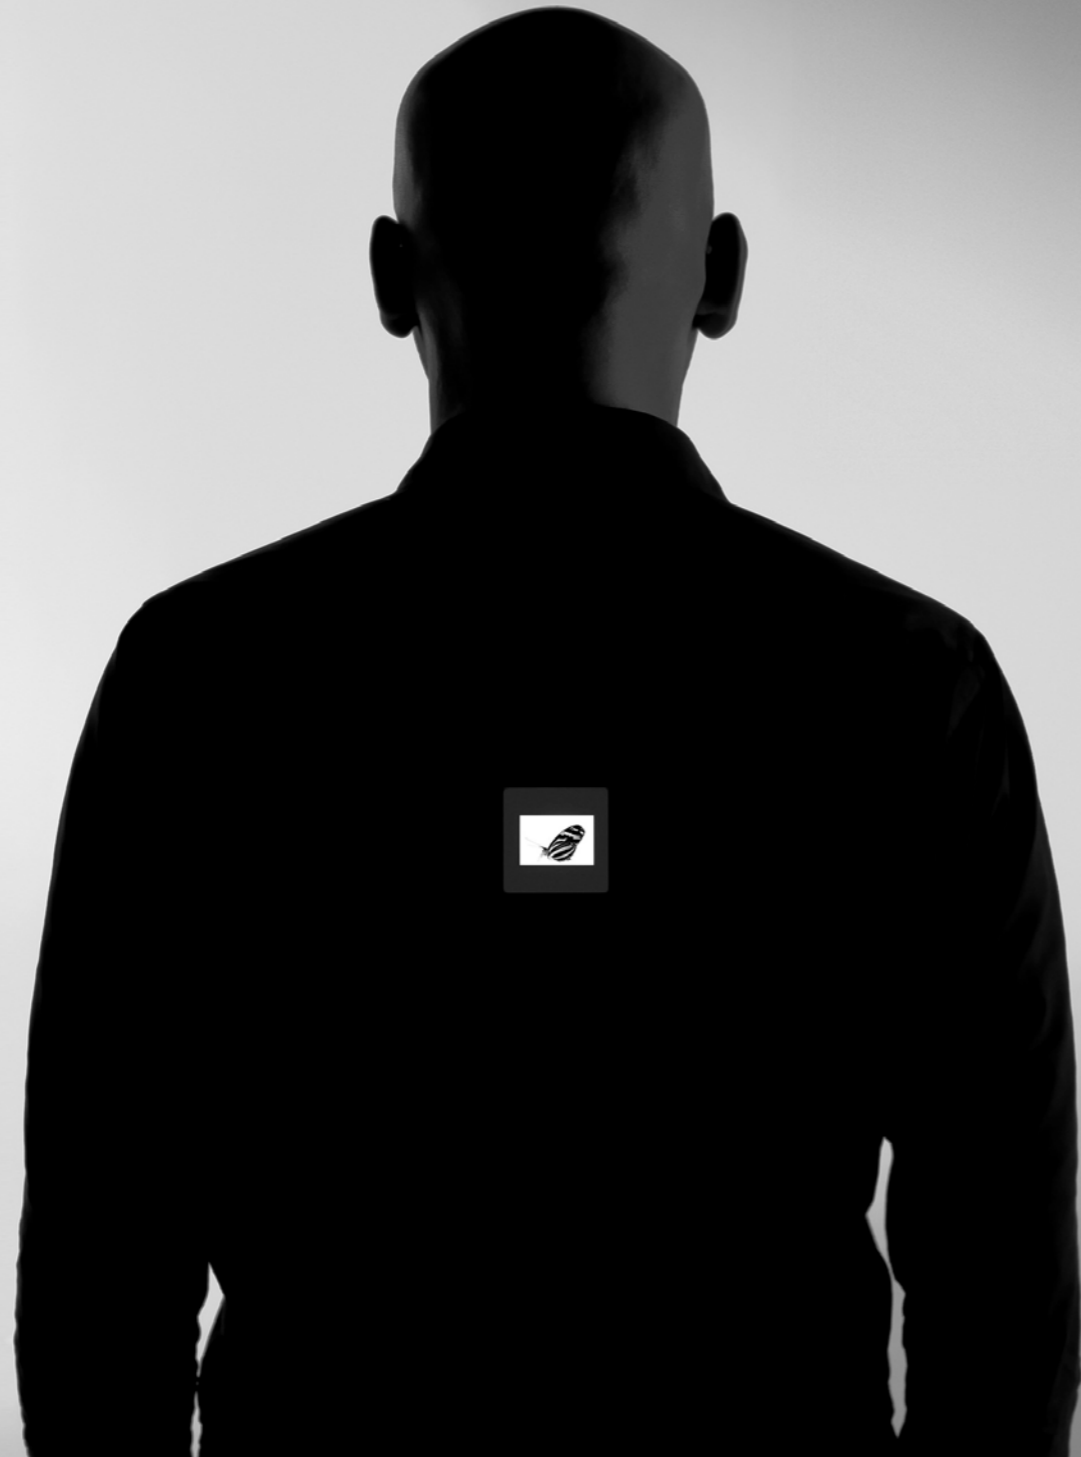

35MM


Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

Material Metal - Polycarbonate

Finish .00 Standard

Note Slowly flashing light luminaire - White frame - Black back side - Customizable images not included - *Minimum purchase 3 pieces.



35MM

0,3W



ON/OFF

Batteries 2xCR2032 included

IP20

Standard - ON/OFF

|1A2640000.00.00 |

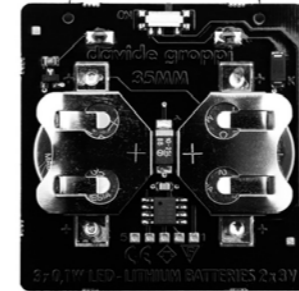

BUGIA

Daide Groppi / 2018



A lightweight and soft light.
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.


BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

Material Metal - Methacrylate
Finish .18 Matt Gold

Note Matt white diffuser luminaire - Gold finish base - Battery life 9 hours.



BUGIA

2W
3000K - 120lm
CRI >90
ON/OFF

Driver with plug not included -
USB cable included


◆ IP20

Matt Gold - 3000K - ON/OFF

1A2351808.30.00

Optional accessories

Drivers



Driver

Matt Black Input 110-240V - 50/60Hz -
Output 5V DC - 2A - 10W - IP20

1Z0000088

Not included



USB to USB-C cable

Matt Black Length 1 m

1Z0000132

Included



PoPuP

Davide Groppi / 2016

Light*Music*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.




PoPuP

Davide Groppi / 2016

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Luminaire and acoustic diffuser with magnetic fixing base - Battery life: 12 hours for light only and 30 hours for audio only at medium volume.

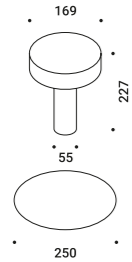

PoPuP


2W
 3000K - 183lm
 CRI >80
 ON/OFF
 5W Audio - 50-20000Hz -
 Driver with plug included
 IP20

Matt White - 3000K - ON/OFF

1A2610308.30.00


Optional accessories

Drivers



Driver		Not included
Input 110-240V - 50/60Hz - Output 14V DC - 0,3A - IP20	1Z0000102	

Other accessories



Rechargeable battery		Included
Matt White 12V DC - NiMH 3700mAh	1A2620300.00.00	



POST PRANDIUM

Daide Groppi / 2023



...During a meal with friends, a ladle is reused to scoop up the light
and serve it onto the table.

A project from many years ago, today in a new wireless version.

Archiproducts Design Award 2023


POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .01 Polished Chrome

Note Matt black base luminaire - Gold finish details - Battery life 9 hours.



POST PRANDIUM


2W
 3000K - 171lm
 CRI >90
 ON/OFF
 Driver not included -
 USB cable included
 IP20

Polished Chrome - 3000K - ON/OFF

1A4550108.30.00

Optional accessories

Drivers




Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088



USB to USB-C cable		Included
Matt Black	Lenght 1 m	1Z0000132



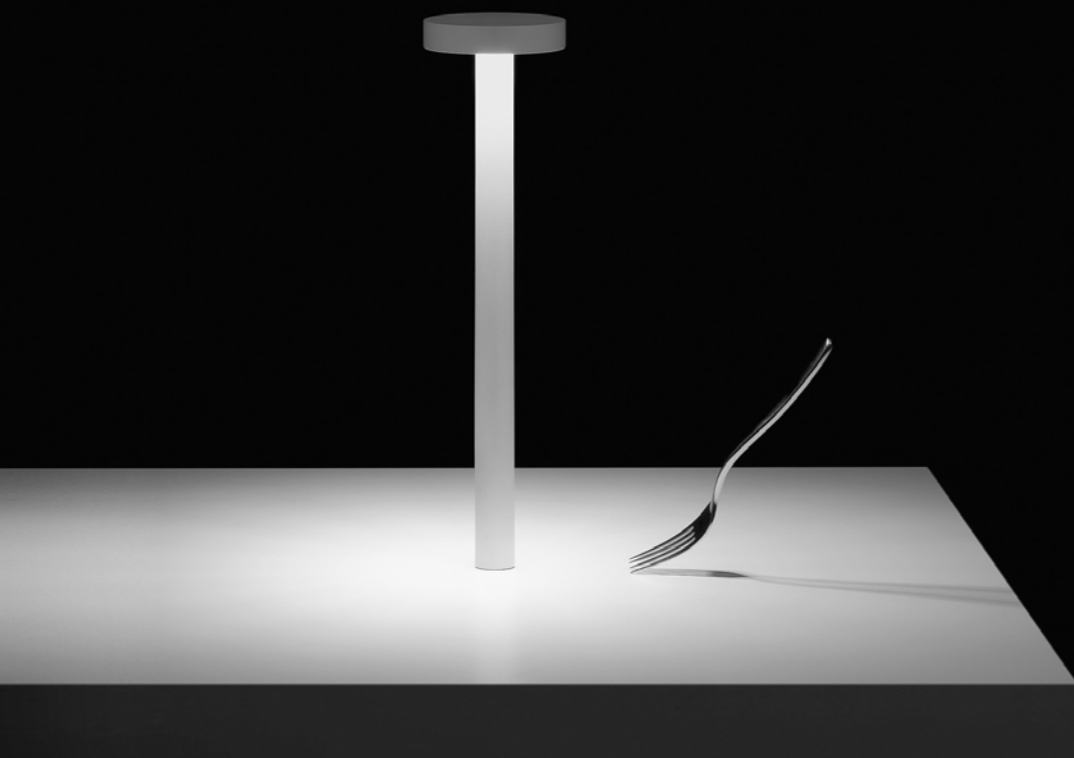

A timeless icon with an eye on the future.
Portable and rechargeable, the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience.
Its light caresses those it illuminates with pure emotion.
Equipped with Touch technology and a magnetic fixing base.
Mention of Honour XXIV Compasso d'Oro ADI Award, 2016

TeTaTeT


Davide Groppi / 2013

Table / Direct / Wireless

Material ABS - Metal - Methacrylate

Finish **.03** Matt White **.04** Matt Black **.18** Matt Gold

Note Magnetic fixing base luminaire - ON/OFF touch - Battery life 12 hours - *Minimum purchase 3 pieces per finish.

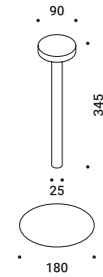

TeTaTeT

2W

2700K - 165lm / 3000K - 178lm

CRI >90

ON/OFF

Driver with plug not included

◆ IP20

Matt White - 2700K - ON/OFF

1A0310308.27.00

Matt White - 3000K - ON/OFF

1A0310308.30.00

Matt Black - 2700K - ON/OFF

1A0310408.27.00

Matt Black - 3000K - ON/OFF

1A0310408.30.00

Matt Gold - 2700K - ON/OFF


1A0311808.27.00

Matt Gold - 3000K - ON/OFF

1A0311808.30.00

Optional accessories

Drivers



Driver


Not included

Matt Black

Input 110-240V - 50/60Hz -
Output 6V DC - 1A - 6W - IP20

1Z0000073

Other accessories



Rechargeable battery

Included

Matt White 4,8V DC - NiMH 4300mAh

1A0430300.00.00

Matt Black 4,8V DC - NiMH 4300mAh

1A0430400.00.00

Matt Gold 4,8V DC - NiMH 4300mAh

1A0431800.00.00

Table


Not included

Matt White

1A4020300.00.00

Matt Black

1A4020400.00.00

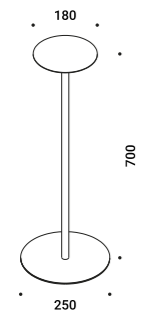

TeTaTeT Flûte

Davide Groppi / 2017



This is an evolution of our TeTaTeT lamp.
The lamp head is lightweight and appears to be floating in air.
The transparent column brings to mind the glasses
used in the classic "mise en place".
Magnetic fixing base.


TeTaTeT Flûte

Davide Groppi / 2017

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Magnetic fixing base and stem luminaire - Transparent stem - Battery life 9 hours - *Minimum purchase 3 pieces.



TeTaTeT Flûte

2W
 2700K - 167lm / 3000K - 180lm
 CRI >90
 ON/OFF
 Driver with plug not included -
 USB cable included


◆ IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF


1A2360308.27.00
 1A2360308.30.00

Optional accessories

Drivers



Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088



USB to USB-C cable		Included
Matt Black	Lenght 1 m	1Z0000132

Other accessories

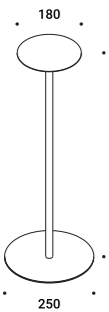


Table		Not included
Matt White		1A4020300.00.00
Matt Black		1A4020400.00.00



VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.
Once again, we decided to take away, seeking only the light.
Transparency is the main feature of this battery-powered lamp.
Archiproducts Design Award 2023


VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .00 Standard

Note Magnetic fixing head luminaire - Transparent stem - Removable transparent disc with reflective effect - Battery life 9 hours - Indoor only - Dry environment.



VIS À VIS

2W
 2700K - 110lm / 3000K - 113lm
 CRI >90
 ON/OFF
 Driver with plug not included -
 USB cable included


◆ IP20

Standard - 2700K - ON/OFF
 Standard - 3000K - ON/OFF

1A4530008.27.00
 1A4530008.30.00

Optional accessories


Drivers



Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088



USB to USB-C cable		Included
Matt Black	Lenght 1 m	1Z0000132

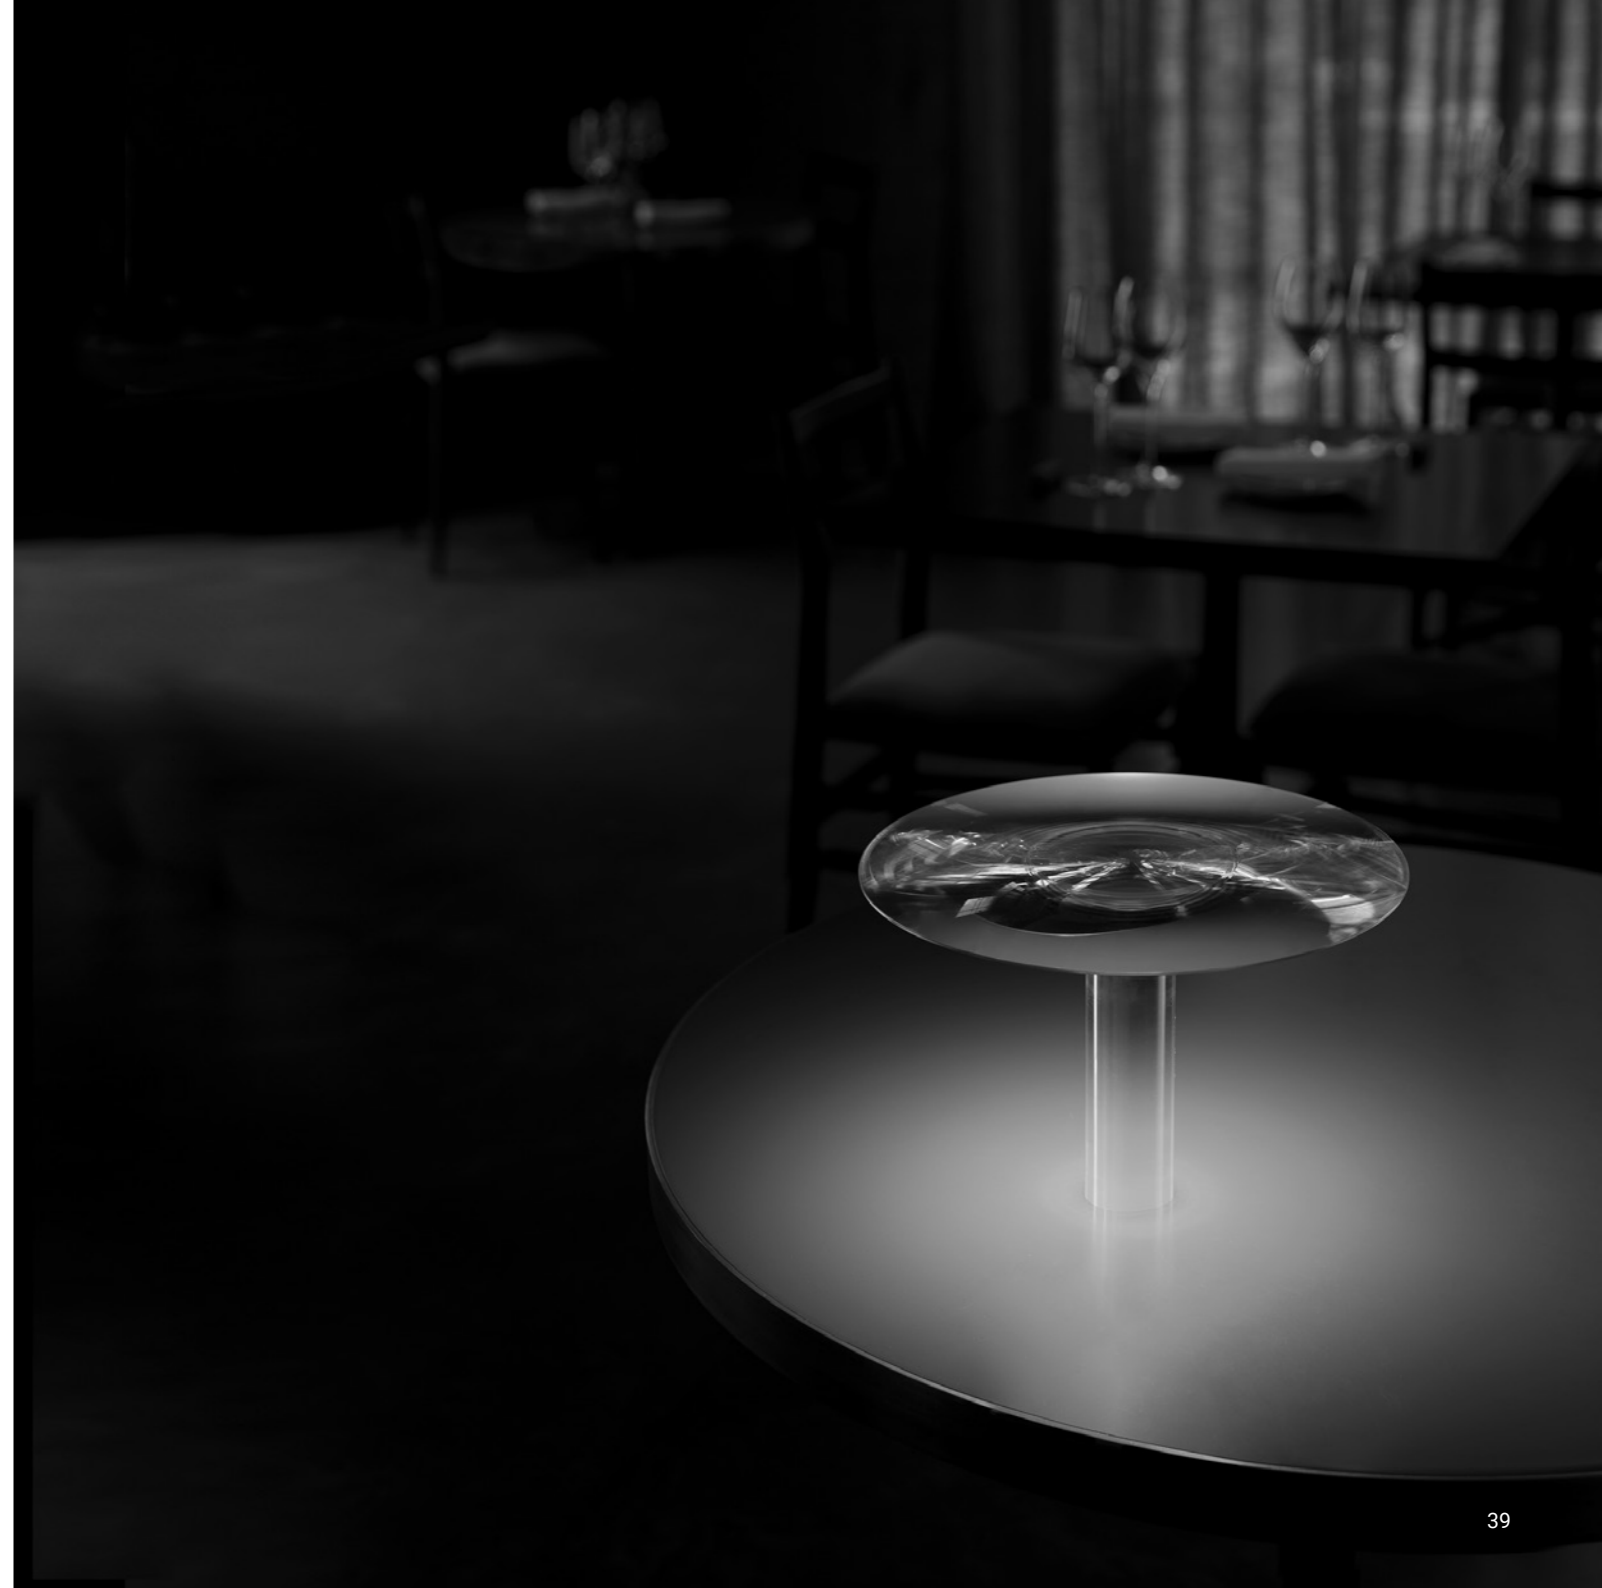

TABLE



ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.

At the top, an open circle, almost a hook for fishermen of the soul.

Selection for ADI Design Index 2022

AZ Award 2022

Archiproducts Design Award 2021


ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material ABS - Carbon Fiber - Metal
Finish .04 Matt Black

Note Black cable luminaire - ON/OFF and touch dimmable.



ANIMA


4W
 5V DC
 2700K - 575lm / 3000K - 589lm
 CRI >80
 Driver not included
 Driver with plug
 Dimmer on board
 USB cable included
 IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A1090408.27.06
 1A1090408.30.06

Optional accessories

Drivers



Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Lenght 1 m	1Z0000132





Full and empty, shadow and light.
A circular mirror to be positioned as you please,
to both light and capture the surrounding space.
Born Series Award 2019


CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor

Material Brass - Metal - Methacrylate - Mirror
Finish .00 Standard

Note Adjustable luminaire - Blue back side mirror plate - Brass stem - Black base - Black cable.



CALVINO


18W
 24V DC
 2700K - 1275lm / 3000K - 1372lm
 CRI >90
 Driver not included
 Driver with plug
 Dimmer on board
 ◆ IP20

Standard - 2700K - Dimmer on board
 Standard - 3000K - Dimmer on board

1A2710008.27.06
 1A2710008.30.06


Optional accessories

Drivers



Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 24V DC - 18W - IP20	1Z0431020



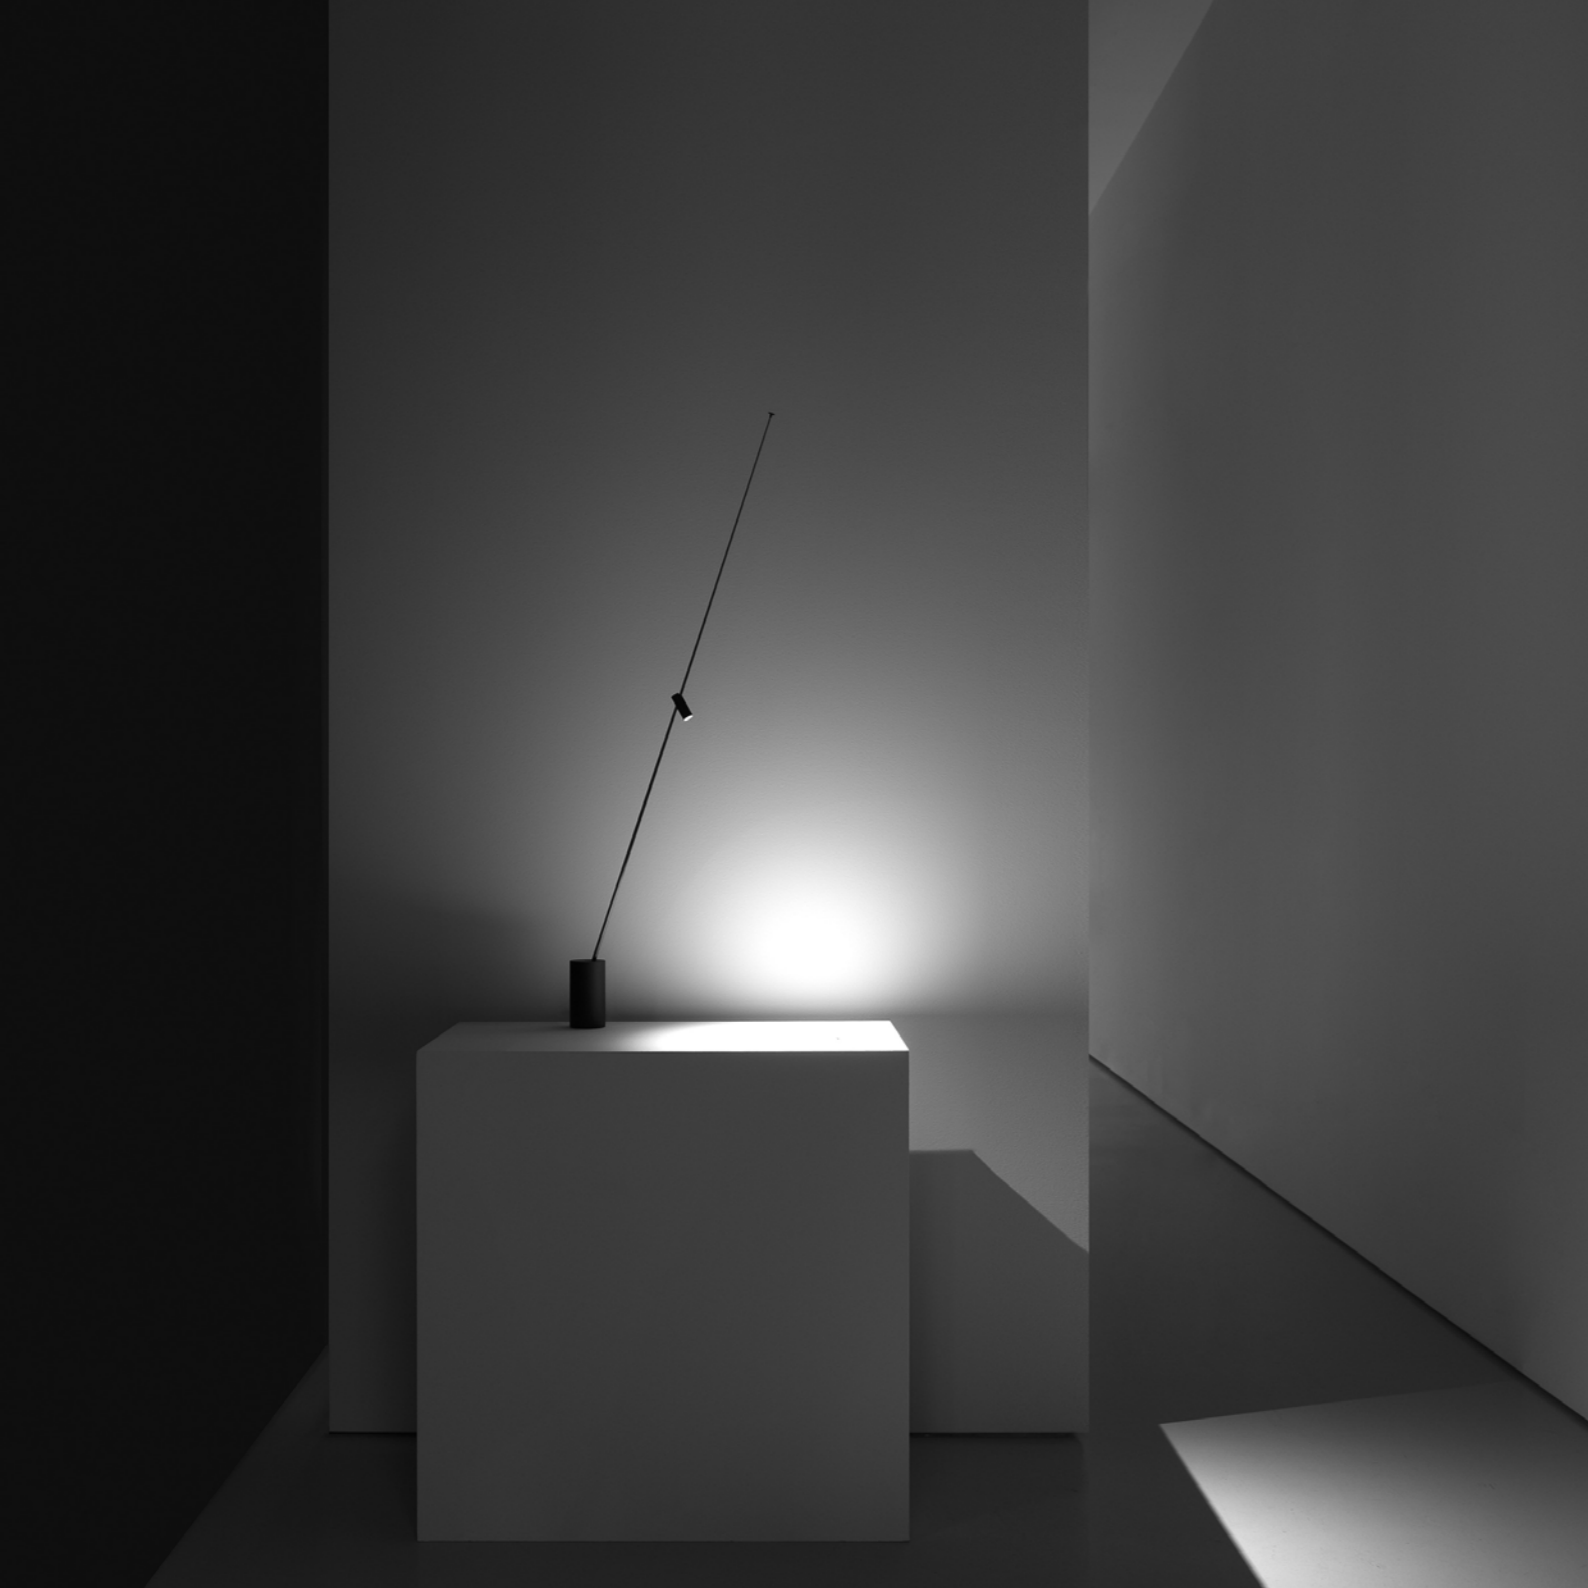

An antenna of light.


Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function. A performing, adjustable and extremely comfortable light.

Selection for ADI Design Index 2023
Archiproducts Design Award 2022

Table / Direct / Indoor

Material Glass fiber - Metal
 Finish .04 Matt Black

Note Adjustable luminaire with black cable and Extradark comfort system.

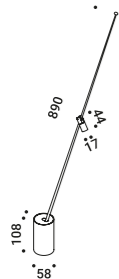

FM

1,5W
 5V DC
 2700K - 154lm / 3000K - 179lm
 CRI >90
 UGR <19
 Driver not included
 Driver with plug
 Dimmer on board
 USB cable included


◆ IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2440408.27.06
 1A2440408.30.06

Optional accessories

Drivers




Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Lenght 1 m	1Z0000132

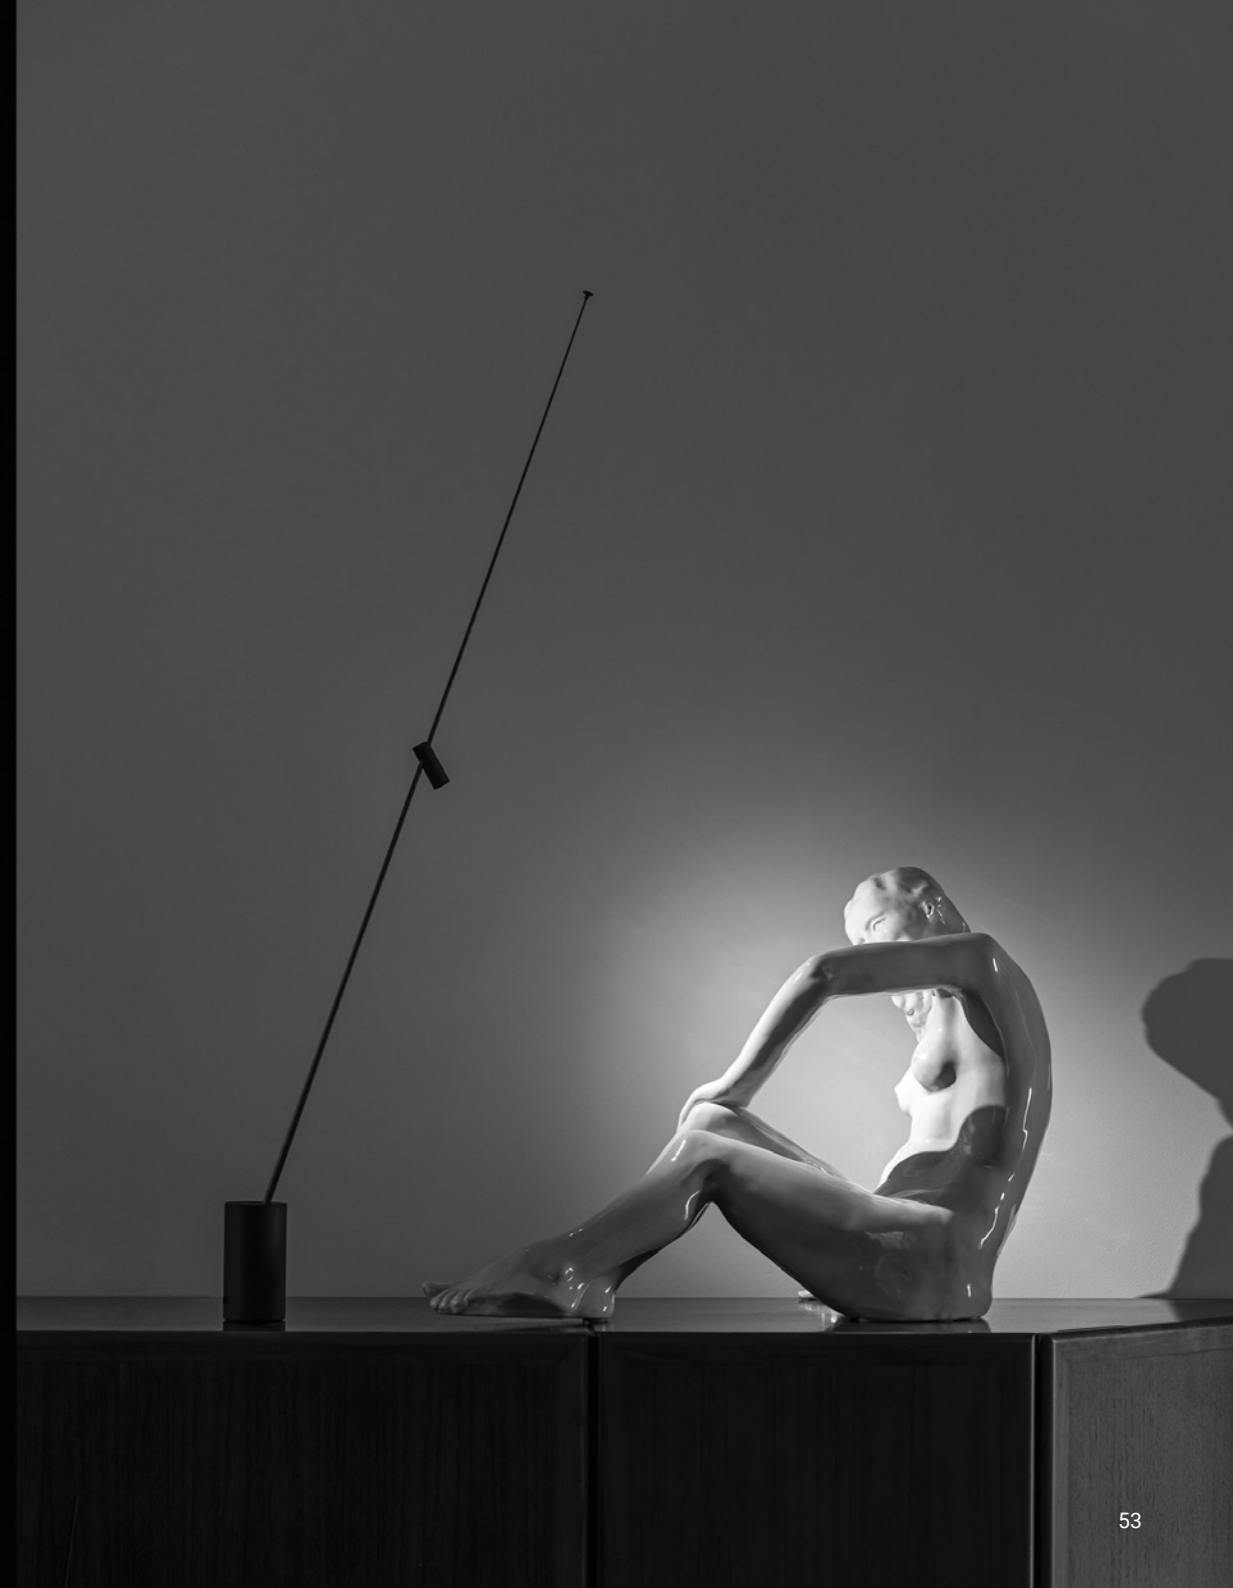

MOON T

Daide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions available.


MOON T

Daide Groppi / 2019

Table / Diffuse / Indoor

Material Japanese paper - Metal - PE
Finish .00 Standard

Note Shade with japanese paper texture - Gold finish base - White cable.



MOON T
Max 15W - E27
220V - 50/60Hz
Bulb not included
Dimmer on board
© IP20

Standard - Dimmer on board

| 1A2690008.00.06 |



MORSETTO

Davide Groppi / 2017



A lamp that can be positioned, balanced and turned, but overall it produces a beautiful light on the table. The oversized workshop-style clamp allows the light source to be positioned far from where the lamp is attached to the table, using three adjustable arms. A table lamp, but at the same time a suspended light.


MORSETTO

Davide Groppi / 2017

Table / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Adjustable luminaire with Extradark comfort system - Red lever clamp - Black cable.

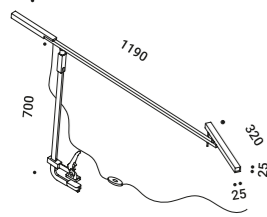

MORSETTO


13W
 24V DC
 2700K - 700lm / 3000K - 753lm
 CRI >90
 UGR <19
 Dimmer on board
 IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2520408.27.06
 1A2520408.30.06

Optional accessories

Drivers



Driver

Matt Black Input 110-240V - 50/60Hz -
 Output 24V DC - 18W - IP20

1Z0431020

Not included




A rigorous project in its design. A dialogue between two essential, concrete and tangible materials: wood and glass.
Part frosted and part transparent, it moves feely on the base, functioning both as diffuser and convex lens.



Table / Diffuse / Indoor

Material Glass - Oak wood
Finish .00 Standard

Note Frosted glass sphere luminaire - Oak wood base - Black cable.



PIGRECO


6,5W
 24V DC
 3000K - 450lm
 CRI >90
 Driver not included
 Driver remote
 Dimmer on board
 ◆ IP20

Standard - 3000K - Dimmer on board

| 1A2600008.30.06 |

Optional accessories


Drivers



Driver

Not included

Matt Black	Input 110-240V - 50/60Hz - Output 24V DC - 18W - IP20	1Z0431020
------------	--	-----------

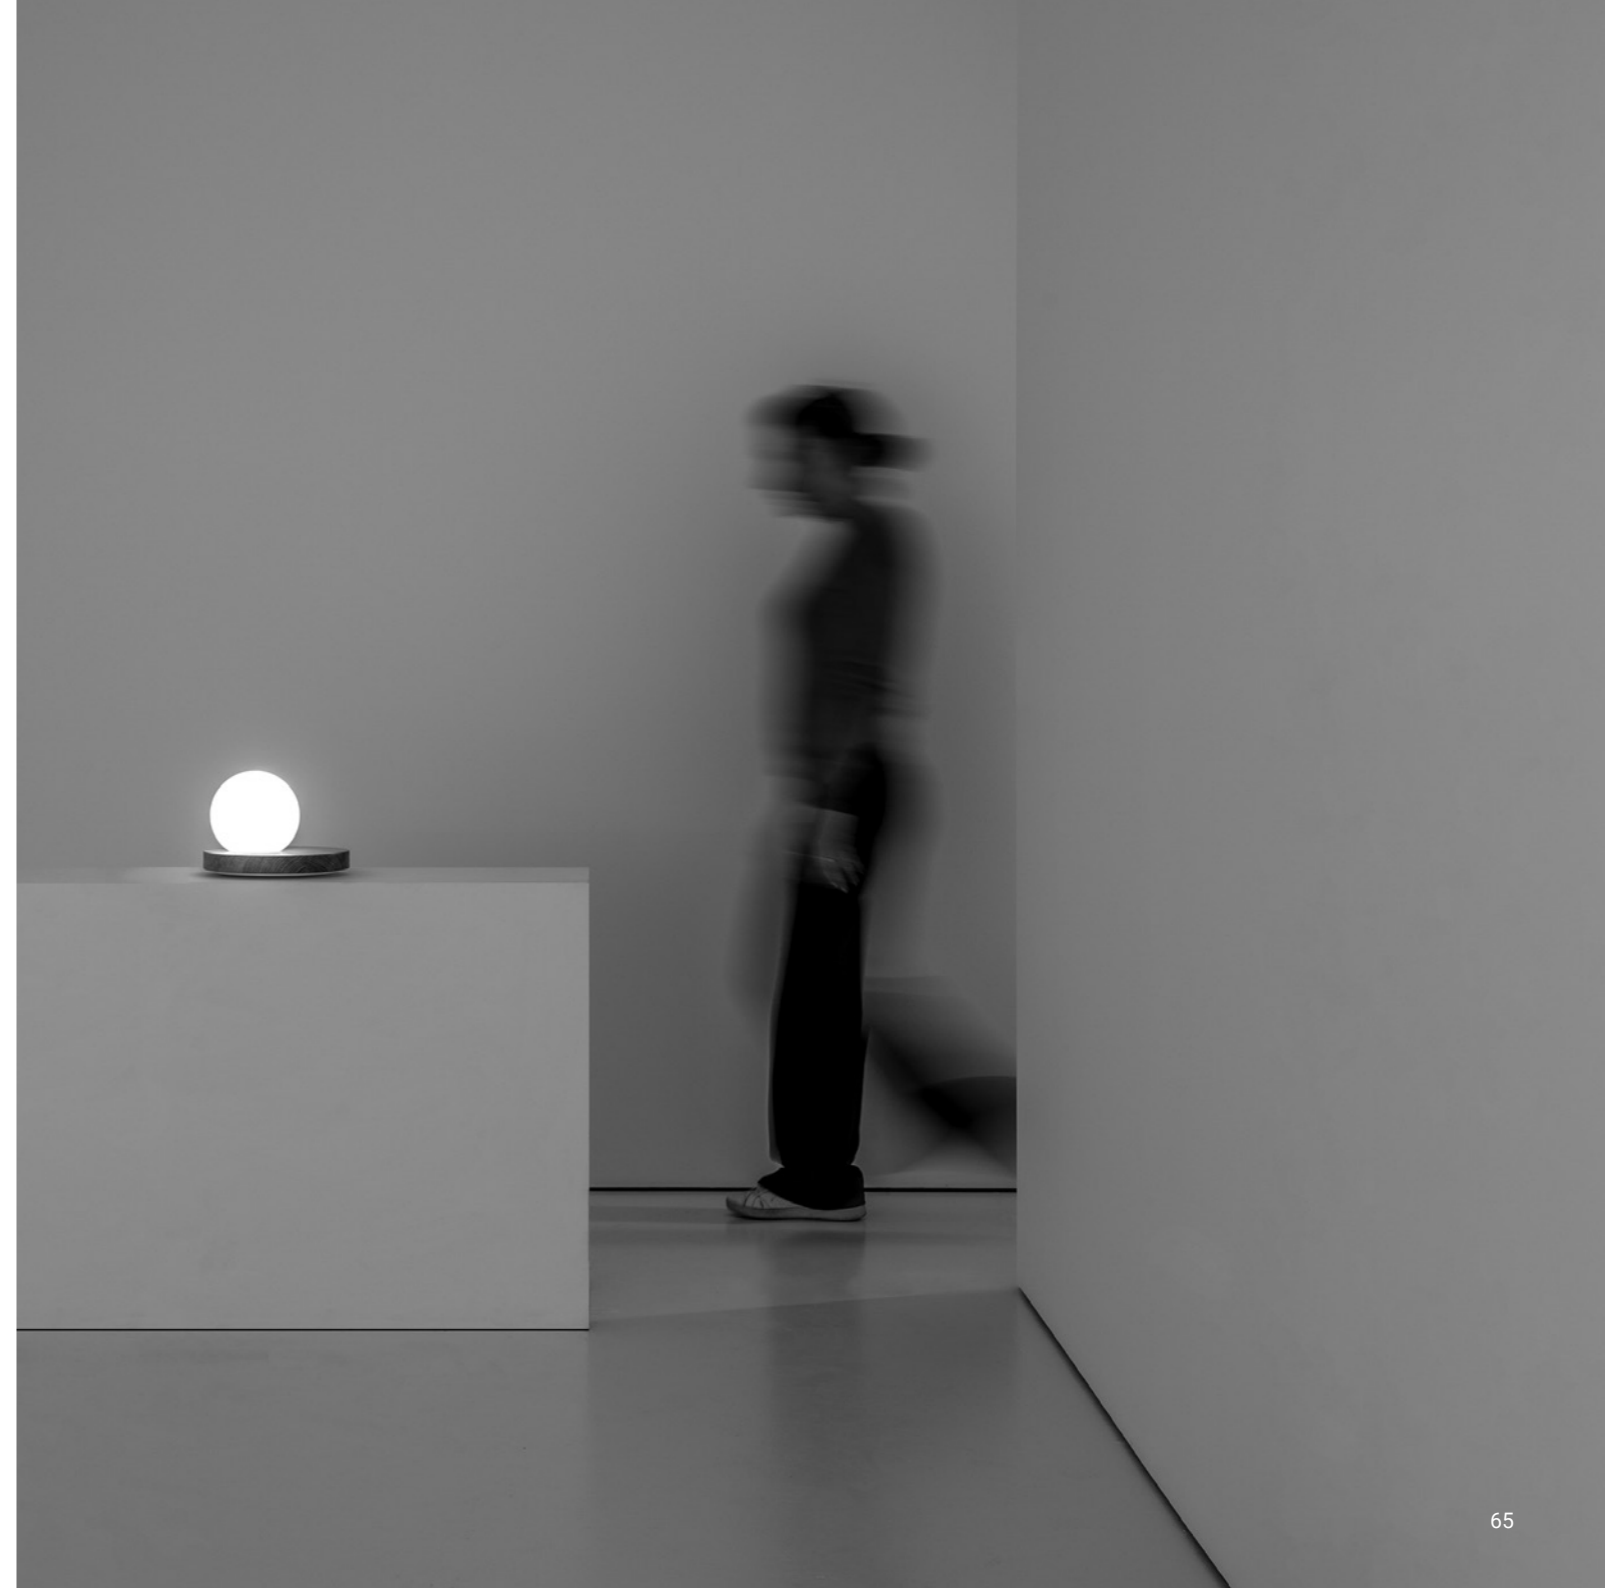

FLOOR




A tribute to Alberto Giacometti and to his thin fellows...
A lamp for lighting pictures, powered by an ordinary electrical socket.
The lamp has an adjustable light and it can be oriented.
The lamp section is reduced to a minimum.

Floor-Suspension / Indirect / Indoor

Material Brass - Methacrylate
Finish **.03** Matt White **.04** Matt Black **.08** Brushed Brass


Note White ceiling rose luminaire - 304 Stainless steel suspension cable - Transparent cable.

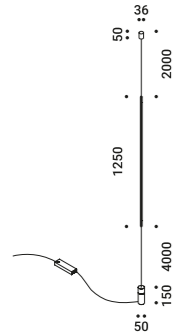

MASAI 1

Power kit with plug model
 15,5W
 220V - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver integrated
 Dimmer on board

Matt White - 2700K - Dimmer on board	1A2720308.27.06
Matt White - 3000K - Dimmer on board	1A2720308.30.06
Matt Black - 2700K - Dimmer on board	1A2720408.27.06
Matt Black - 3000K - Dimmer on board	1A2720408.30.06
Brushed Brass - 2700K - Dimmer on board	1A2720808.27.06
Brushed Brass - 3000K - Dimmer on board	1A2720808.30.06

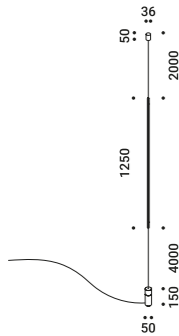

MASAI 2

Remote power supply model
 13W
 220V - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K	1A2720308.27.20
Matt White - 3000K	1A2720308.30.20
Matt Black - 2700K	1A2720408.27.20
Matt Black - 3000K	1A2720408.30.20
Brushed Brass - 2700K	1A2720808.27.20
Brushed Brass - 3000K	1A2720808.30.20

Optional accessories

Suspension kits



Sloped ceiling fixing kit		Not included
Nickel plated - 1 Piece	1A0510000.00.00	



Recessed fixing kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.03.00




Ceiling fixing kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00




Wall back plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver LED		Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	1Z0240410



Dimmable controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z0000034



MOON F

Daide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions available.


MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard


Note Shade with japanese paper texture luminaire.



MOON 80 F
 Diameter 780 mm
 Max 15W - E27
 220V - 50Hz
 Bulb not included
 Dimmer on board
IP20

Standard - Dimmer on board

| 1A4880008.00.06 |



MOON 120 F
 Diameter 1200 mm
 Max 2x25W - E27
 220V - 50Hz
 Bulb not included
 Dimmer on board
IP20

Standard - Dimmer on board

| 1A4890008.00.06 |

MOON F

Davide Groppi / 2023

Optional accessories

Bulbs



LED - E27 - A60			Not included
	220-240V - 11,2W - 360° - 2700K - 1521lm - CRI 90 - Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790



LED - E27 - A150			Not included
	220-240V - 20W - 200° - 2700K - 2452lm - CRI 80 - Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020

Other accessories

Wooden crate			Not included
	Packaging for air and sea shipping	MOON 120 F	49860010

Moisture barrier bag			Not included
	Packaging for air and sea shipping	MOON 120 F	49860020

ORIGINE

Davide Groppi - Giorgio Rava / 2020



From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light. Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Available in 3 different heights and in an outdoor version.

AZ Award 2021 and **People's Choice Archiproducts Design Award 2020**

ORIGINE


Davide Groppi - Giorgio Rava / 2020

Floor / Indirect / Indoor

Material Glass fiber - Metal

Finish .04 Matt Black

Note Black cable luminaire.

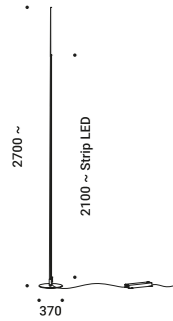

ORIGINE 290

Height 2700 mm

25W

220V

2700K - 1956lm / 3000K - 2075lm

CRI >80

Driver integrated

Dimmer on board

IP20

Matt Black - 2700K - Dimmer on board

1A2300408.27.06

Matt Black - 3000K - Dimmer on board

1A2300408.30.06



ORIGINE 390

Height 3700 mm

30W

220V

2700K - 2843lm / 3000K - 3063lm

CRI >80

Driver integrated

Dimmer on board


IP20

Matt Black - 2700K - Dimmer on board

1A2310408.27.06

Matt Black - 3000K - Dimmer on board

1A2310408.30.06

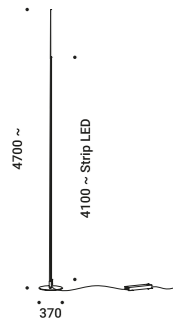

ORIGINE 490

Height 4700 mm

35W

220V

3000K - 4051lm / 2700K - 3760lm

CRI >80

Driver integrated

Dimmer on board

IP20

Matt Black - 3000K - Dimmer on board

1A2320408.27.06

Matt Black - 2700K - Dimmer on board

1A2320408.30.06






A special project, an authentic ready-made.
Obtained from a flexible fishing rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
and being amazed by so much weightlessness.
The light is the fisherman's line, catching faces, gazes, people.
Available in 4 different heights and in an outdoor version.


XXIII Compasso d'Oro ADI Award 2014
Elle Deco International Design Award 2011

Floor / Direct / Indoor


Material Glass fiber - Metal
Finish **.03** Matt White **.04** Matt Black


Note Adjustable luminaire - White finish luminaire with white cable and black finish luminaire with black cable.

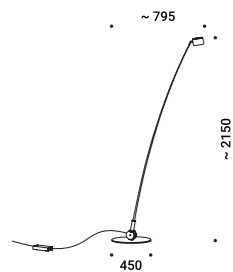


SAMPEI 230
 Height 2150 mm
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

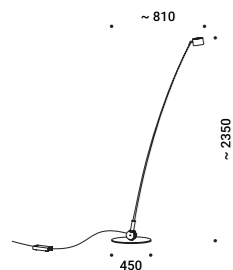

Matt White - 2700K - Dimmer on board	1A3730308.27.06
Matt White - 3000K - Dimmer on board	1A3730308.30.06
Matt Black - 2700K - Dimmer on board	1A3730408.27.06
Matt Black - 3000K - Dimmer on board	1A3730408.30.06




SAMPEI 260
 Height 2350 mm
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

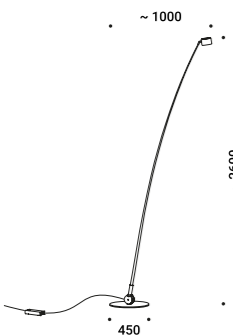

Matt White - 2700K - Dimmer on board	1A3740308.27.06
Matt White - 3000K - Dimmer on board	1A3740308.30.06
Matt Black - 2700K - Dimmer on board	1A3740408.27.06
Matt Black - 3000K - Dimmer on board	1A3740408.30.06



SAMPEI 290
 Height 2600 mm
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

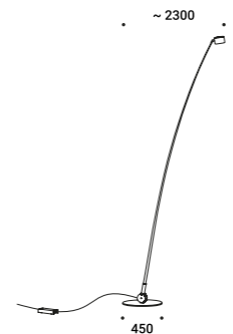
Matt White - 2700K - Dimmer on board	1A3750308.27.06
Matt White - 3000K - Dimmer on board	1A3750308.30.06
Matt Black - 2700K - Dimmer on board	1A3750408.27.06
Matt Black - 3000K - Dimmer on board	1A3750408.30.06



SAMPEI 440
 Height 3900 mm
 21W
 220V - 50/60Hz
 2700K - 1832lm / 3000K - 1915lm
 CRI >90
 Driver integrated
 Dimmer on board


Matt White - 2700K - Dimmer on board	1A3760308.27.06
Matt White - 3000K - Dimmer on board	1A3760308.30.06
Matt Black - 2700K - Dimmer on board	1A3760408.27.06
Matt Black - 3000K - Dimmer on board	1A3760408.30.06

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre	Not included
Matt Black	1X0070400.04.00



Accessory holder + Elliptical filter	Not included
Matt Black	1X0070400.05.00



Blue filter	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00

SUSPENSION



CATHODE


Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born.
Think steampunk: situations in which instruments were inspired by
the rudiments of electricity. The classic light bulb that has no future
becomes a wonderful device made of luminous diodes.
What would the past have looked like if the future had arrived first?

Suspension / Diffuse / Indoor

Material Blown glass - Metal
Finish **.03** Matt White **.08** Brushed Brass

Note White finish luminaire with white ceiling rose and white cable - Brushed brass finish luminaire with black ceiling rose and black cable - CATHODE 2: installation on plasterboard with flat rose - Magnetic fixing - Single ceiling rose for multiple luminaires on request.

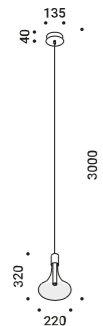

CATHODE 1

Ceiling rose model

5,6W
 220V - 50Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 ON/OFF



Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Brushed Brass - 2700K - ON/OFF
 Brushed Brass - 3000K - ON/OFF

1A2980308.27.00
 1A2980308.30.00
 1A2980808.27.00
 1A2980808.30.00



CATHODE 1


Ceiling rose model

6W
 220V - 50Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 DALI



Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Brushed Brass - 2700K - DALI
 Brushed Brass - 3000K - DALI

1A2980308.27.01
 1A2980308.30.01
 1A2980808.27.01
 1A2980808.30.01

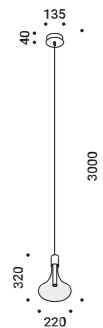

CATHODE 1

Ceiling rose model

6W
 220V - 50Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 PUSH



Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Brushed Brass - 2700K - PUSH
 Brushed Brass - 3000K - PUSH

1A2980308.27.04
 1A2980308.30.04
 1A2980808.27.04
 1A2980808.30.04



CATHODE 2

Remote power supply model
 4W
 Max 350mA DC
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver not included




Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K

1A2990308.27.20
 1A2990308.30.20
 1A2990808.27.20
 1A2990808.30.20

Optional accessories


Suspension kits



Kit ceiling rose and decentralizer

Not included

Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00




Decentralization kit

Not included

		CATHODE 1	1A0360000.00.00
--	--	-----------	-----------------


Drivers



Driver LED

Not included

220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0240860.350
--------------------	--------------------------	-----------	---------------



Driver LED

Not included

220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	CATHODE 2	1Z0240840.350
--------------------	--------------------------	-----------	---------------



LOUIS XIV

Davide Groppi / 2023


Louis XIV is the freakiest letter of our light alphabet.
It's a disobedient design that translates a certain rebellion
to common lamp models into light.
I wanted to investigate the idea of the chandelier:
in line with our poetics, Louis XIV is the only possible solution
for lightness and irony.
Dimmable suspension lamp with double emission.

LOUIS XIV

Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material Glass - Metal
 Finish .19 Polished Gold

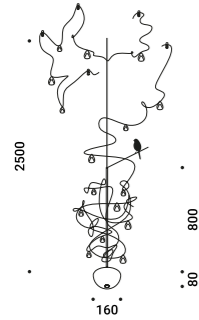

LOUIS XIV 2

Remote power supply model
 30W
 Max 500mA DC
 2700K - Up 1650lm - Down 410lm /
 3000K - Up 1650lm - Down 410lm
 CRI >90
 UGR <19
 Driver not included
 2 Drivers required



Polished Gold - 2700K
 Polished Gold - 3000K

1A4361908.27.20
 1A4361908.30.20

Optional accessories

Suspension kits




Suspension fixing kit - See page 296

Recessed fixing kit for 12,5 mm plasterboard

Not included

Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.05.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.05.00

Drivers



Driver LED

Not included

220-240V(100-127V)	500mA/26,5W(26,5W)/IP20/DALI - PUSH - 1-10V	1Z0240530.500
--------------------	--	---------------




MAGIA

Michele Groppi / 2023




Light and transparency are the true stars of this project.
We have always liked to think heretically, evoking mystery, magic and seduction.
Magia is the new modular suspension lighting system that can be adapted
to suit the different heights of the rooms and can generate
direct and indirect light with the 360° adjustable module.
In this case, the lens is not used to focus, but to modify the vision
and perception of the object.
The effect of the convex lens conceals the part of the light beam and produces the
lightest effect of suspension and inconsistency.
Archiproducts Design Award 2023

Single installation with recessed fixing kit or ceiling fixing kit

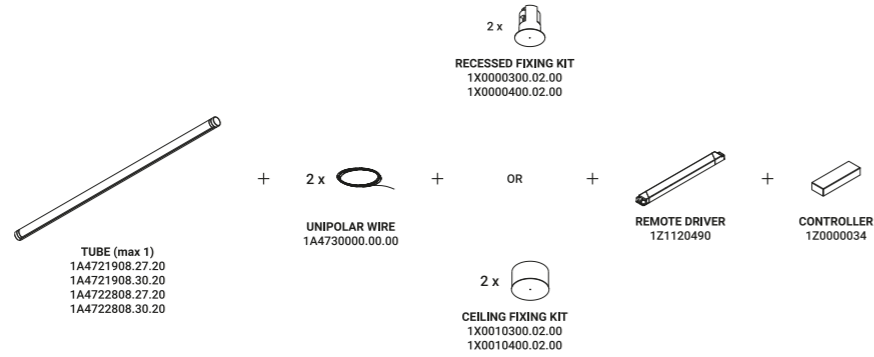


Multiple installation with recessed fixing kit or ceiling fixing kit

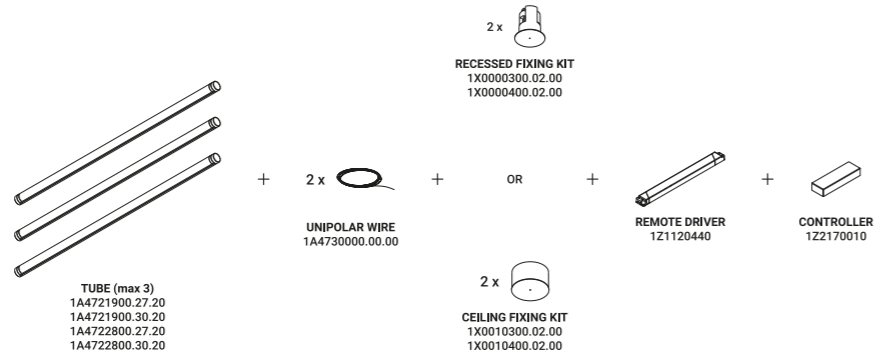

Suspension / Direct-Indirect / Indoor

Material Metal - PMMA
Finish .19 Polished Gold .28 Polished Black Chrome

Note Adjustable modular system.

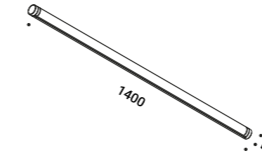

MAGIA - MODULE

19W
24V DC
2700K - 1272lm / 3000K - 1312lm
CRI >90
Driver not included
IP20

Polished Gold - 2700K
Polished Gold - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A4721908.27.20
1A4721908.30.20
1A4722808.27.20
1A4722808.30.20

Compulsory accessories

Installation kits



Unipolar wire - 6 m			Not included
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

Suspension kits







Recessed fixing kit for 12,5 mm plasterboard		Not included
Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.02.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.02.00



Ceiling fixing kit		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.02.00
Matt Black	For electrical cables - 1 Piece	1X0010400.02.00


Compulsory accessories

Drivers


	Driver LED				Not included
	100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	
	Driver LED				Not included
	100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440	
	Driver LED				Not included
	100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500	
	Dimmable controller				Not included
		DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z0000034	

Optional accessories


Suspension kits

	Wall back plate				Not included
	Matt White	For mounting on brick masonry walls		1X0050300.01.00	




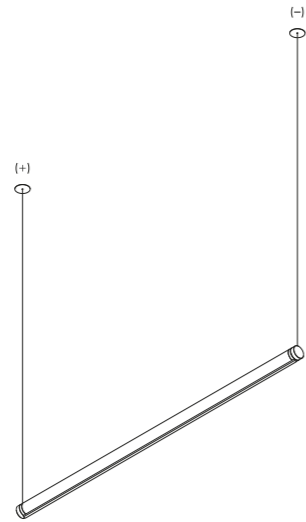


Example of single installation with recessed fixing kit

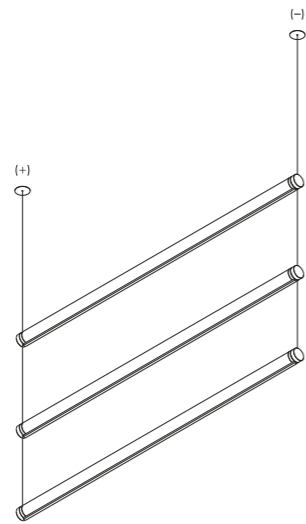


Example of multiple installation with recessed fixing kit

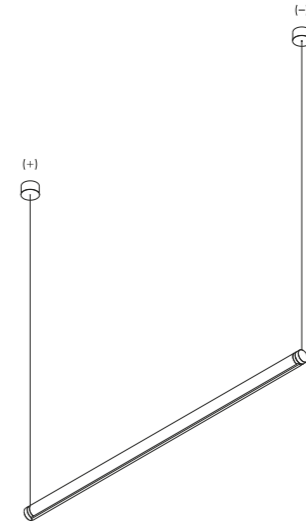

Example of single installation with ceiling fixing kit

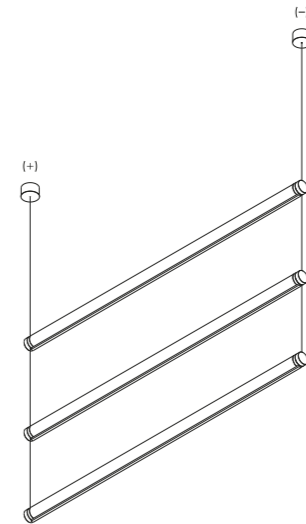


Example of multiple installation with ceiling fixing kit

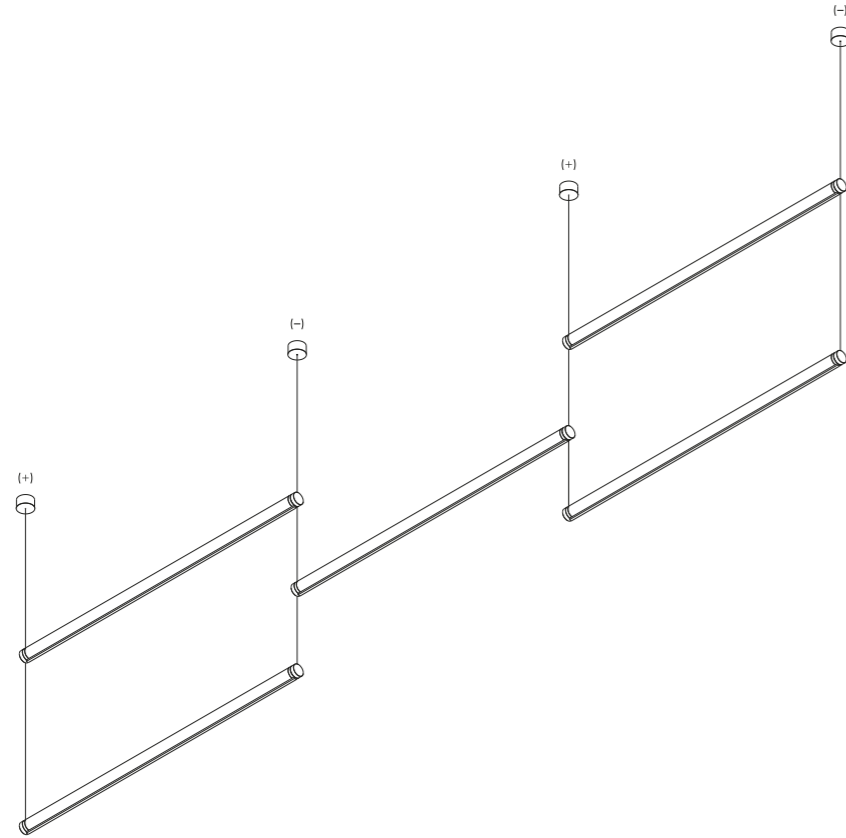

Example of multiple installation | Max 3 modules for cable



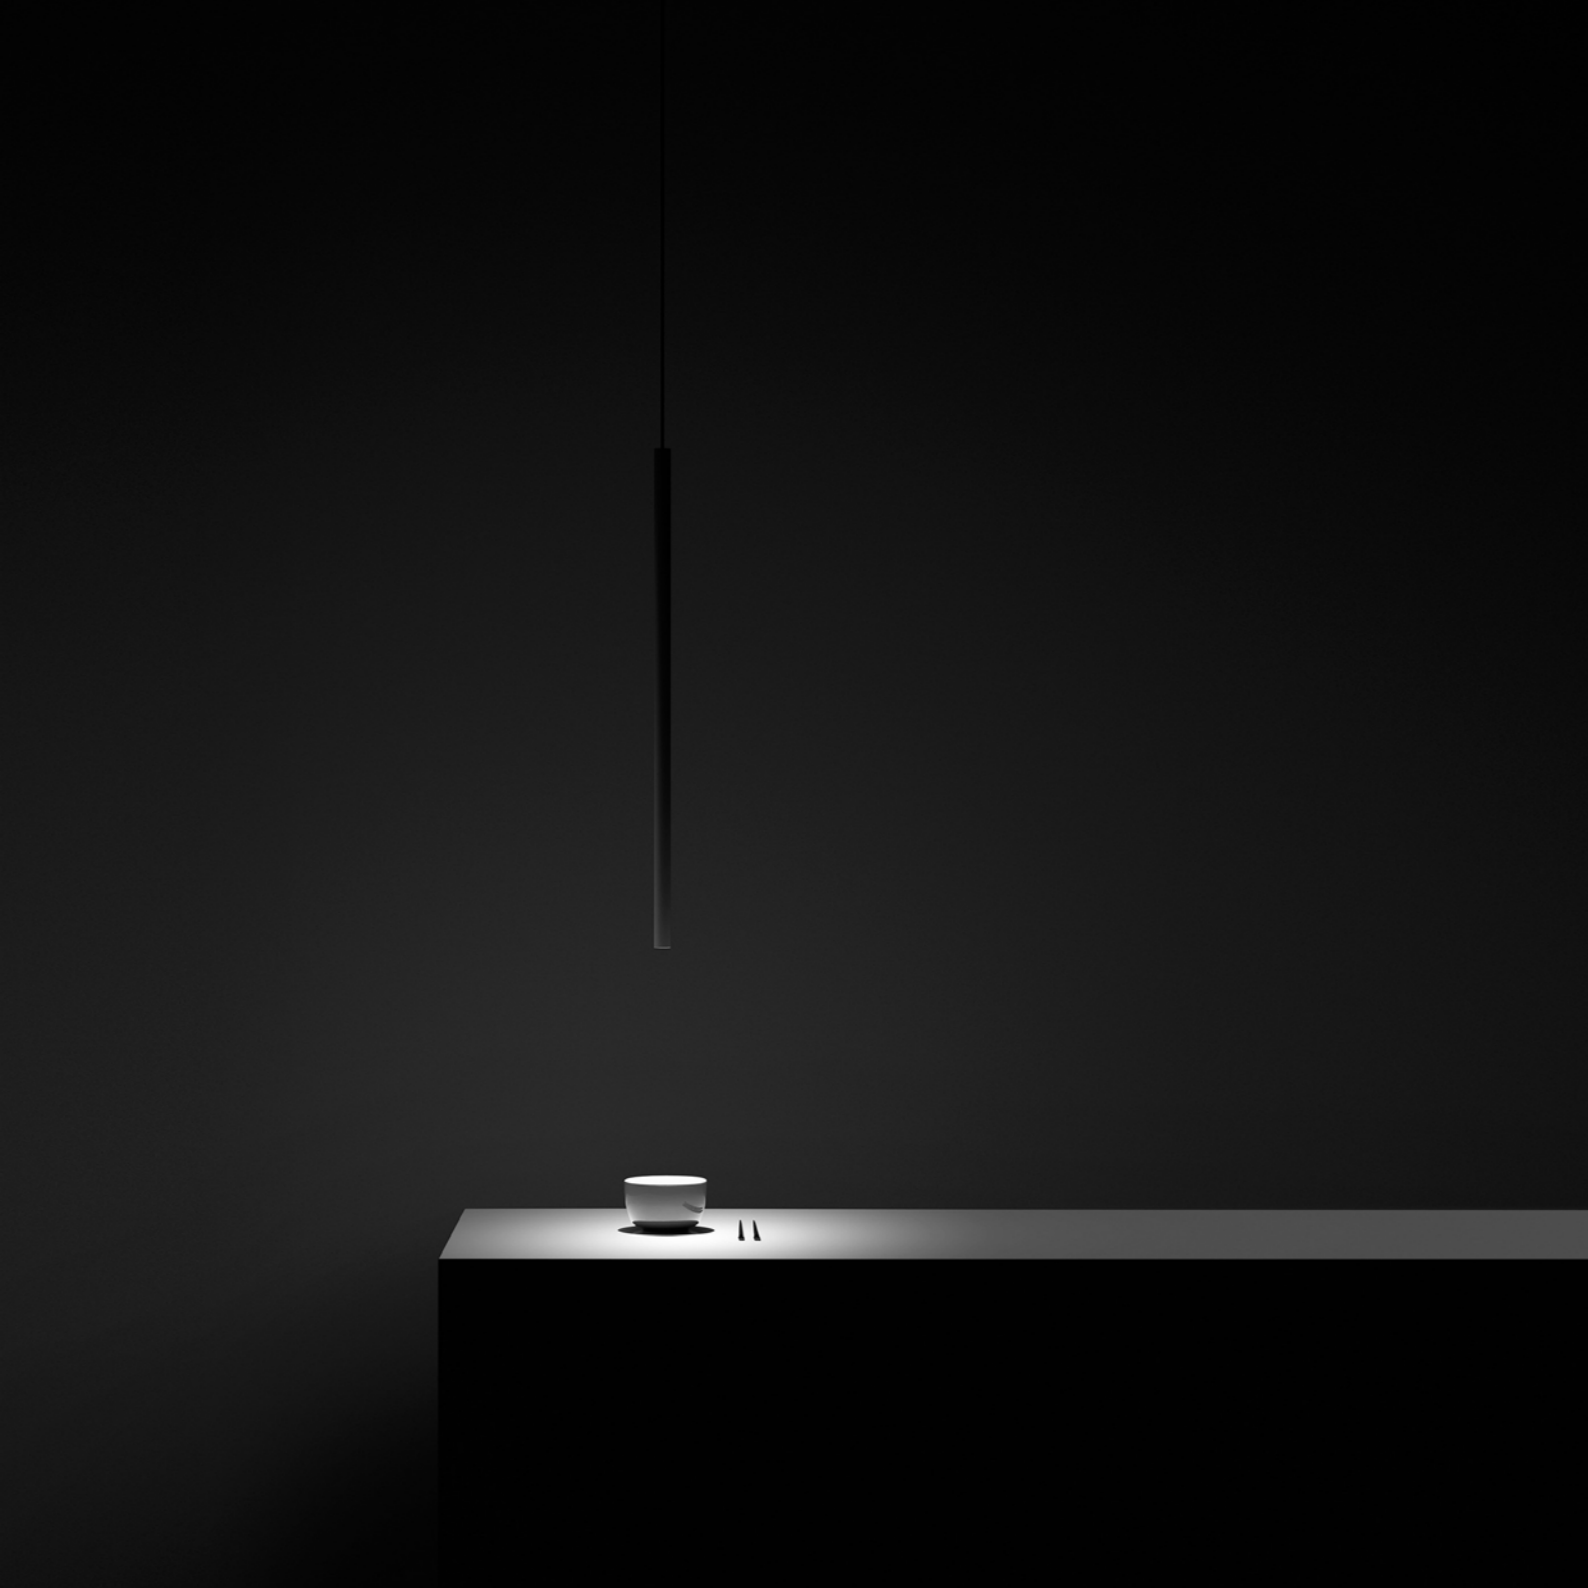


So slim and essential...
The fundamental concept of this project is minimalism. A small tube that lights the table with wonder. A real dual project: sign and light.

Suspension / Direct / Indoor

Material Metal
Finish **.03** Matt White **.04** Matt Black **.08** Brushed Brass **.26** Total Black

Note White and black finish luminaire with white ceiling rose and white cable - Brushed brass and total black finish luminaire with black ceiling rose and black cable - MISS 2: flat rose - Magnetizing fixing - Installation on plasterboard - Single ceiling rose for multiple luminaires on request.



MISS 1

Ceiling rose model
 5,6W
 220V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 ON/OFF

Matt White - 2700K - ON/OFF	1A2960308.27.00
Matt White - 3000K - ON/OFF	1A2960308.30.00
Matt Black - 2700K - ON/OFF	1A2960408.27.00
Matt Black - 3000K - ON/OFF	1A2960408.30.00
Brushed Brass - 2700K - ON/OFF	1A2960808.27.00
Brushed Brass - 3000K - ON/OFF	1A2960808.30.00
Total Black - 2700K - ON/OFF	1A2962608.27.00
Total Black - 3000K - ON/OFF	1A2962608.30.00



MISS 1

Ceiling rose model
 6W
 220V - 50Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 DALI


Matt White - 2700K - DALI	1A2960308.27.01
Matt White - 3000K - DALI	1A2960308.30.01
Matt Black - 2700K - DALI	1A2960408.27.01
Matt Black - 3000K - DALI	1A2960408.30.01
Brushed Brass - 2700K - DALI	1A2960808.27.01
Brushed Brass - 3000K - DALI	1A2960808.30.01
Total Black - 2700K - DALI	1A2962608.27.01
Total Black - 3000K - DALI	1A2962608.30.01



MISS 1

Ceiling rose model
 6W
 220V - 50Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 PUSH

Matt White - 2700K - PUSH	1A2960308.27.04
Matt White - 3000K - PUSH	1A2960308.30.04
Matt Black - 2700K - PUSH	1A2960408.27.04
Matt Black - 3000K - PUSH	1A2960408.30.04
Brushed Brass - 2700K - PUSH	1A2960808.27.04
Brushed Brass - 3000K - PUSH	1A2960808.30.04
Total Black - 2700K - PUSH	1A2962608.27.04
Total Black - 3000K - PUSH	1A2962608.30.04




MISS 2

Remote power supply model
 4W
 Max 350mA DC
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver not included


Matt White - 2700K	1A2970308.27.20
Matt White - 3000K	1A2970308.30.20
Matt Black - 2700K	1A2970408.27.20
Matt Black - 3000K	1A2970408.30.20
Brushed Brass - 2700K	1A2970808.27.20
Brushed Brass - 3000K	1A2970808.30.20
Total Black - 2700K	1A2972608.27.20
Total Black - 3000K	1A2972608.30.20

Optional accessories

Suspension kits




Decentralization kit			Not included
	MISS 1	1A0360000.00.00	




Kit ceiling rose and decentralizer			Not included
Matt White	White cable 3 m included	MISS 1	1A0770300.00.00
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00

Drivers



Driver LED			Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	MISS 2	1Z0240840.350



Driver LED			Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0240860.350

MOON

Daide Groppi / 2005




Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Table and floor versions available.

Suspension / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard


Note Shade with japanese paper texture luminaire - 304 Stainless steel suspension cables - White cable - MOON 60 DE: dual emission with separated switch - Transparent cable.

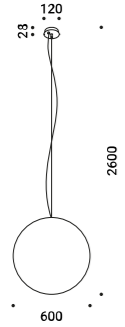

MOON 60
 Max 15W - E27
 220V - 50Hz
 Bulb not included
 ON/OFF
 IP20

Standard - ON/OFF


1A2820008.00.00

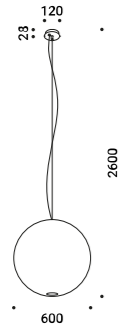

MOON 60 DE
 Dual emission
 Max 15W - E27
 220V - 50Hz
 Bulb not included
 ON/OFF
 IP20

Standard - ON/OFF


1A2830008.00.00

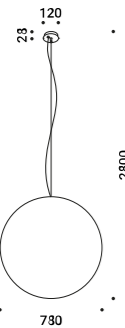

MOON 80
 Max 15W - E27
 220V - 50Hz
 Bulb not included
 ON/OFF
 IP20

Standard - ON/OFF


1A2840008.00.00

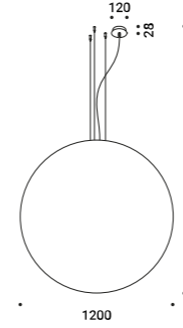

MOON 120
 Max 2x25W - E27
 220V - 50Hz
 Bulb not included
 ON/OFF
 IP20

Standard - ON/OFF

1A2850008.00.00

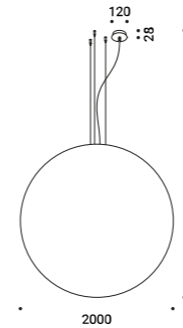

MOON 200
 Max 4x25W - E27
 220V - 50Hz
 Bulb not included
 ON/OFF
 IP20

Standard - ON/OFF

1A2860008.00.00

Optional accessories

Bulbs



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° - 3000K - 375lm - CRI 97 - Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330500	



LED - E27 - A60			Not included
220-240V - 11,2W - 360° - 2700K - 1521lm - CRI 90 - Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / MOON 80 / MOON 200	1Y0330790	



LED - E27 - A150			Not included
220-240V - 20W - 200° - 2700K - 2452lm - CRI 80 - Energy Efficiency E - Dimmable	MOON 120	1Y2160020	

Suspension kits



Decentralization kit			Not included
	MOON 60	1A0360000.00.00	



Sloped rose fixing kit			Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00	



Sloped ceiling fixing kit			Not included
Nickel plated - 1 Piece	MOON 120	1A0510000.00.00	

Optional accessories

Other accessories

Wooden crate			Not included
Packaging for air and sea shipping	MOON 120	49860010	

Wooden crate			Not included
Packaging for air and sea shipping	MOON 200	48780020	

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 120	49860020	

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 200	48780030	

NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.
A simple project, almost a revival of the old electrical wiring.
A plug, a cable, some isolators, a socket and a LED.
Outdoor version available.
Design Plus Award 2014




NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note White finish luminaire with white cable and black finish luminaire with black cable (10 m) - 5 Clamps included.

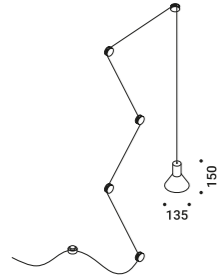

NEURO

Max 15W - E27

220V - 50/60Hz

Bulb not included

ON/OFF

Ⓢ Ⓜ IP20

Matt White - ON/OFF

1A0160308.00.00

Matt Black - ON/OFF

1A0160408.00.00

Optional accessories

Installation kits



Wall and ceiling rose

Not included

Matt White

1A3440300.00.00

Matt Black

1A3440400.00.00



Clamp

Included

Matt White 1 Piece

1A3270300.00.00

Matt Black 1 Piece

1A3270400.00.00

Bulbs



LED - E27 - PAR30s

Not included

220-240V - 9,5W - 25° -
 3000K - 760lm - CRI 80 -
 Energy Efficiency F - Dimmable

1Y0330730



REFLEX S


Michele Groppi / 2023



A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces and gives the eye
unprecedented perspectives, unexpected depths, illusions of light.

Suspension / Indirect / Indoor

Material Metal - Mirror
 Finish .04 Matt Black

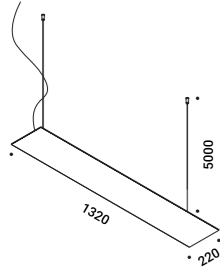

REFLEX S 2

Remote power supply model
 49W
 Max 500mA DC
 2700K - 5787lm / 3000K - 6156lm
 CRI >90
 Driver not included
 IP20

Matt Black - 2700K
 Matt Black - 3000K

1A4790408.27.20
 1A4790408.30.20

Optional accessories

Suspension kits



Recessed fixing kit for 12,5 mm plasterboard


		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.04.00

Suspension fixing kit - See page 296



Ceiling fixing kit


		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00



Wall back plate

		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver LED

		Not included
220-240V(100-127V)	1000mA/60W(40W)/IP20/DALI	1Z0241140.1000

SHANGHAI

Davide Groppi / 2013




The smallest possible shape.
A suspended luminous segment. Beautiful by itself or in composition.
Suitable for working area or kitchen.

Suspension / Direct / Indoor

Material Metal - Methacrylate
Finish .03 Matt White .08 Brushed Brass

Note White ceiling rose luminaire - 304 Stainless steel suspension cables - Transparent coaxial cable.

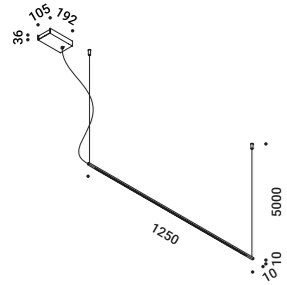


SHANGHAI 1

Power kit with plug model
 15W
 220V - 50/60Hz
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver integrated
 PUSH

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Brushed Brass - 2700K - PUSH
 Brushed Brass - 3000K - PUSH

1A3260308.27.04
 1A3260308.30.04
 1A3260808.27.04
 1A3260808.30.04

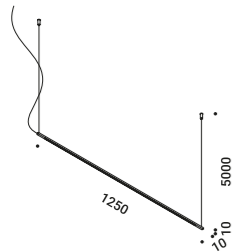

SHANGHAI 2

Remote power supply model
 13W
 24V DC
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K

1A3260308.27.20
 1A3260308.30.20
 1A3260808.27.20
 1A3260808.30.20

Optional accessories

Suspension kits



Sloped ceiling fixing hook		Not included	
	1 Piece	1A0530000.00.00	



Recessed fixing kit for 12,5 mm plasterboard		Not included	
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm		1X0000300.01.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm		1X0000400.01.00




Recessed fixing kit for 12,5 mm plasterboard		Not included	
Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00



Ceiling fixing kit		Not included	
Matt White	For suspension cables - 1 Piece		1X0010300.01.00
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00




Ceiling fixing kit		Not included	
Matt White	For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00




Wall back plate		Not included	
Matt White	For mounting on brick masonry walls		1X0050300.01.00

Drivers




Driver LED		Not included	
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	SHANGHAI 2	1Z0240410



Dimmable controller		Not included	
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SHANGHAI 2	1Z0000034

SIMBIOSI

Davide Groppi / 2015

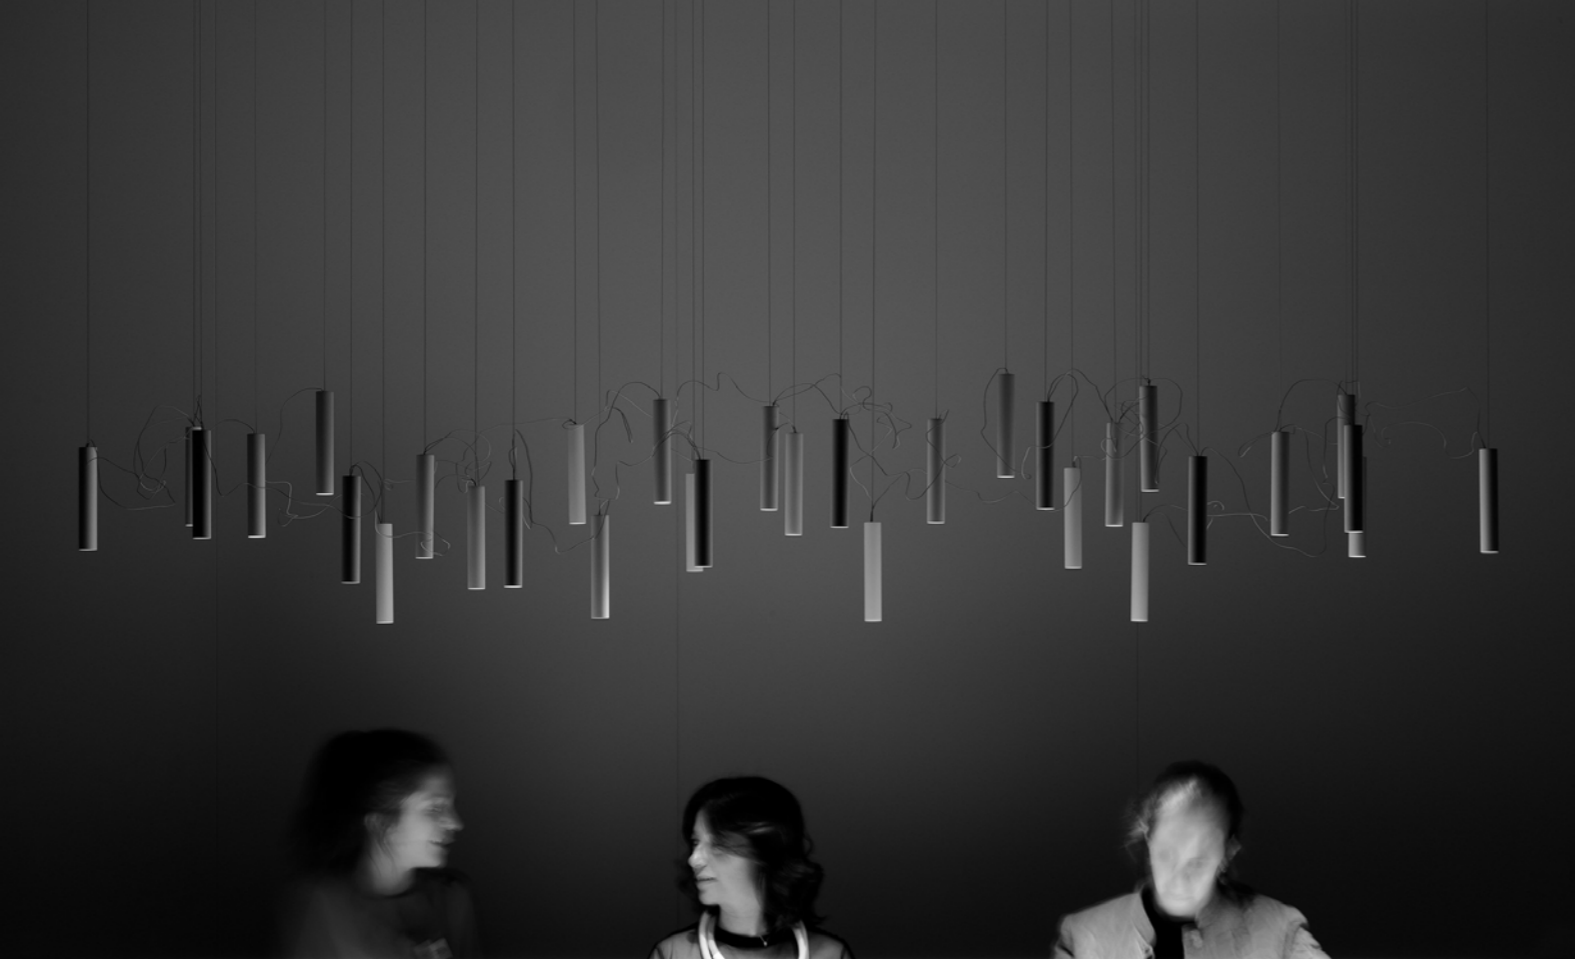

A de-structured chandelier that can be re-assembled as you like.
A conjuring trick that gives you the possibility of connecting the diodes in series
using very weak electric currents with wires that are practically invisible.
The very thin wire that connects the light sources and brings them alive, one in
relation to the other, is the principal component of this project.


SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .26 Total Black

Note White finish luminaire with white ceiling rose and red wires - Black finish luminaire with black ceiling rose and anthracite gray wires - 304 Stainless steel suspension cables.

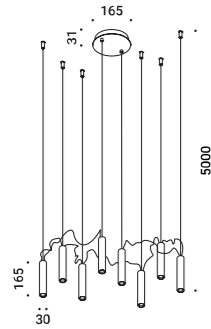

SIMBIOSI


15W
 220V - 50/60Hz
 2700K - 931lm / 3000K - 960lm
 CRI >90
 Driver integrated
 PUSH
 IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Total Black - 2700K - PUSH
 Total Black - 3000K - PUSH

1A2870308.27.04
 1A2870308.30.04
 1A2872608.27.04
 1A2872608.30.04

Optional accessories

Suspension kits




Sloped ceiling fixing hook

Not included

1 Piece

1A0530000.00.00

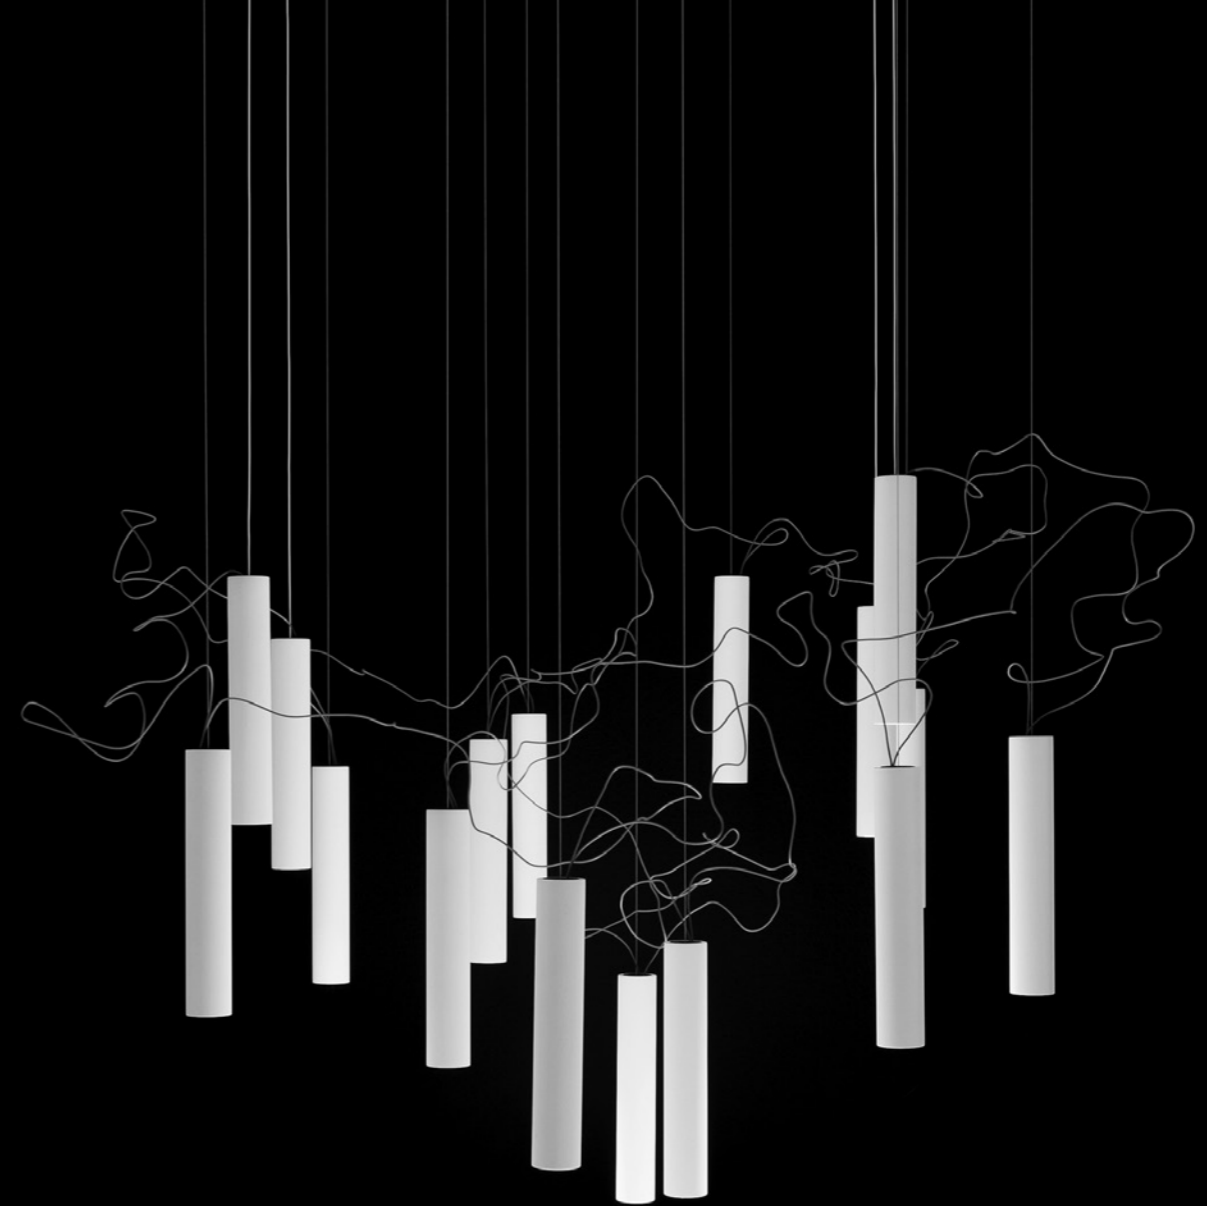

SOTTILE

Davide Groppi / 2023




A blade of light just 7 millimetres thick, the expression of that purest and most essential part of our thought. The surprise of an extremely thin, yet at the same time very bright, lamp.

Suspension / Direct / Indoor

Material Metal
Finish .29 Brushed Bronze .36 Brushed Black

Note Dimmable suspension lamp for direct light.




SOTTILE 2

Remote power supply model
 19W
 24V DC
 2700K - 1692lm / 3000K - 1855lm
 CRI >90
 Driver not included
 IP20

Brushed Bronze - 2700K
 Brushed Bronze - 3000K
 Brushed Black - 2700K
 Brushed Black - 3000K

1A4232908.27.20
 1A4232908.30.20
 1A4233608.27.20
 1A4233608.30.20



SOTTILE 2 DE

Remote power supply model -
 Dual emission
 2x19W
 24V DC
 2700K - Up 1692lm - Down 1692lm /
 3000K - Up 1855lm - Down 1855lm
 CRI >90
 Driver not included
 IP20

Brushed Bronze - 2700K
 Brushed Bronze - 3000K
 Brushed Black - 2700K
 Brushed Black - 3000K

1A4642908.27.20
 1A4642908.30.20
 1A4643608.27.20
 1A4643608.30.20

Optional accessories

Suspension kits




Recessed fixing kit for 12,5 mm plasterboard

		<i>Suspension fixing kit - See page 296</i>
Not included		
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling fixing kit


		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00



Wall back plate


		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver LED

		Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490



Dimmable controller

		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034

SOTTOSOPRA

Daide Groppi / 2023



The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.
Sottosopra: pure, elegant, wonderfully efficient.


SOTTOSOPRA

Davide Groppi / 2023

Suspension / Indirect-Direct / Indoor

Material Metal
Finish .03 Matt White

Note Dimmable suspension lamp with double emission.

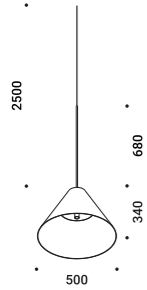

SOTTOSOPRA 2

Remote power supply model
 30W
 Max 500mA DC
 2700K - Down 228lm - Up 1827lm /
 3000K - Down 245lm - Up 1876lm
 CRI >90 / >80
 UGR <19
 Driver not included
 2 Drivers required



Matt White - 2700K
 Matt White - 3000K

1A4540308.27.20
 1A4540308.30.20

Optional accessories

Suspension kits

Suspension fixing kit - See page 296




Recessed fixing kit for 12,5 mm plasterboard

Not included

Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.05.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.05.00

Drivers



Driver LED

Not included

220-240V(100-127V)	500mA/26,5W(26,5W)/IP20/DALI - PUSH - 1-10V	1Z0240530.500
--------------------	--	---------------



WALL

DOT P

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Wall / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire.



DOT P 51

Max 10W - GU10
 220V - 50/60Hz
 Bulb not included
 ON/OFF
 IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A2490308.00.00
 1A2490408.00.00

Optional accessories

Bulbs



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° - 3000K - 375lm - CRI 97 - Energy Efficiency G - Dimmable	DOT P 51	1Y0330500	




LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° - 2700K - 390lm - CRI 95 - Energy Efficiency G - Dimmable	DOT P 51	1Y1580210	




LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° - 3000K - 410lm - CRI 95 - Energy Efficiency G - Dimmable	DOT P 51	1Y1580010	

Optional accessories


Other accessories



Darklight			Not included
MR16	LED SORAA - GU10	1Y1580040	



25° beam filter			Not included
MR16	LED SORAA - GU10	1Y1580020	



36° beam filter			Not included
MR16	LED SORAA - GU10	1Y1580030	

EDISON'S NIGHTMARE

Harry Thaler / 2014



A gestural project, full of irony and nostalgia.
Therefore, among a thousand stories, prohibitions, absurd technical rules,
we have reached the end. The end of the incandescent bulb.
Edison's Nightmare is a salute to Edison's light bulb*, a dream that changed the way
we live forever, stealing time to read and write from sleep.
It is a classic light bulb, nailed to the wall. Like a work of art.
** From 01 September 2012, incandescent bulbs cannot be sold in the EU.*


EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

Material Blown glass - Metal
Finish .00 Standard

Note Coaxial cable luminaire - Transparent cable - Halogen bulb included.

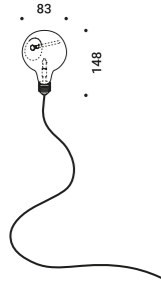

EDISON'S NIGHTMARE


Max 10W - G4 - 12V
 100-240V - 50/60Hz
 Bulb not included
 Driver not included
 Driver remote
 IP20

Standard

1A3380008.00.20

Optional accessories

Drivers



Driver LED

Not included

100-240V	12V/20W/IP20/1-10V	1Z0240900
----------	--------------------	-----------





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time.

The light message is punctuated by a blinking LED, offering reading in movement.


FILM

Alessandra Dallagiovanna - Davide Groppi / 2010

Objects-Wall / Diffuse / Indoor

Material Metal - Polycarbonate
Finish .00 Standard

Note Slowly flashing lights luminaire - White luminous module - Black fixing structure - Customizable images not included - Modules connector included.




FILM
 3W
 5V DC
 Driver not included
 Driver with plug
 IP20

Standard

| 1A3410008.00.20 |

Optional accessories

Drivers



Driver		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to JACK 2.1 cable		Not included
	Lenght 0,9m	1Z0280880





MIRA

Omar Carraglia / 2012


A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Wall / Direct / Indoor

Material Metal
 Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire.




MIRA

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 DALI
 IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A2280308.27.01
 1A2280308.30.01
 1A2280408.27.01
 1A2280408.30.01




MIRA

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 PUSH
 IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH

1A2280308.27.04
 1A2280308.30.04
 1A2280408.27.04
 1A2280408.30.04



MIRA SWITCH

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 ON/OFF
 IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Matt Black - 2700K - ON/OFF
 Matt Black - 3000K - ON/OFF

1A2280308.27.00
 1A2280308.30.00
 1A2280408.27.00
 1A2280408.30.00





MIRA MAGNETIC

Omar Carraglia / 2015

Lamp with a simple and essential shape.
For interiors and adjustable, it is designed with a magnetic application system
to be even more versatile and functional.


MIRA MAGNETIC

Omar Carraglia / 2015

Wall / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire with magnetic fixing base - White finish luminaire with white cable and black finish luminaire with black cable (3 m).



MIRA MAGNETIC


5,6W
 Max 500mA DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A3680308.27.20
 1A3680308.30.20
 1A3680408.27.20
 1A3680408.30.20


Optional accessories

Drivers



Power supply kit with plug Not included

Matt Black	Input 220V - 50Hz - Output 350mA - 15W - IP20 - Dimmer on board	1A3180408.00.06
Matt White	Input 220V - 50Hz - Output 350mA - 15W - IP20 - Dimmer on board	1A3180308.00.06



Driver LED Not included

220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500
--------------------	--------------------------	---------------



MORSETTO P

Daide Groppi / 2019



A lamp that can be positioned, balanced and turned,
but overall it produces a beautiful light on the table.
It's the wall version of the Morsetto lamp.
Three adjustable arms allow the light source to be positioned
far from where the lamp is attached.


MORSETTO P

Davide Groppi / 2019

Wall / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Adjustable luminaire with Extradark comfort system - Black cable.

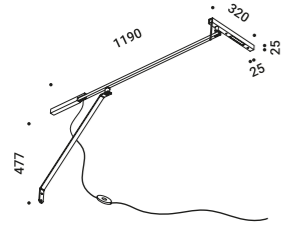

MORSETTO P


13W
24V DC
2700K - 700lm / 3000K - 753lm
CRI >90
UGR <19
Dimmer on board
◆ IP20

Matt Black - 2700K - Dimmer on board
Matt Black - 3000K - Dimmer on board

1A2570408.27.06
1A2570408.30.06

Optional accessories

Drivers




Driver

Matt Black
Input 110-240V - 50/60Hz -
Output 24V DC - 18W - IP20

1Z0431020

Not included



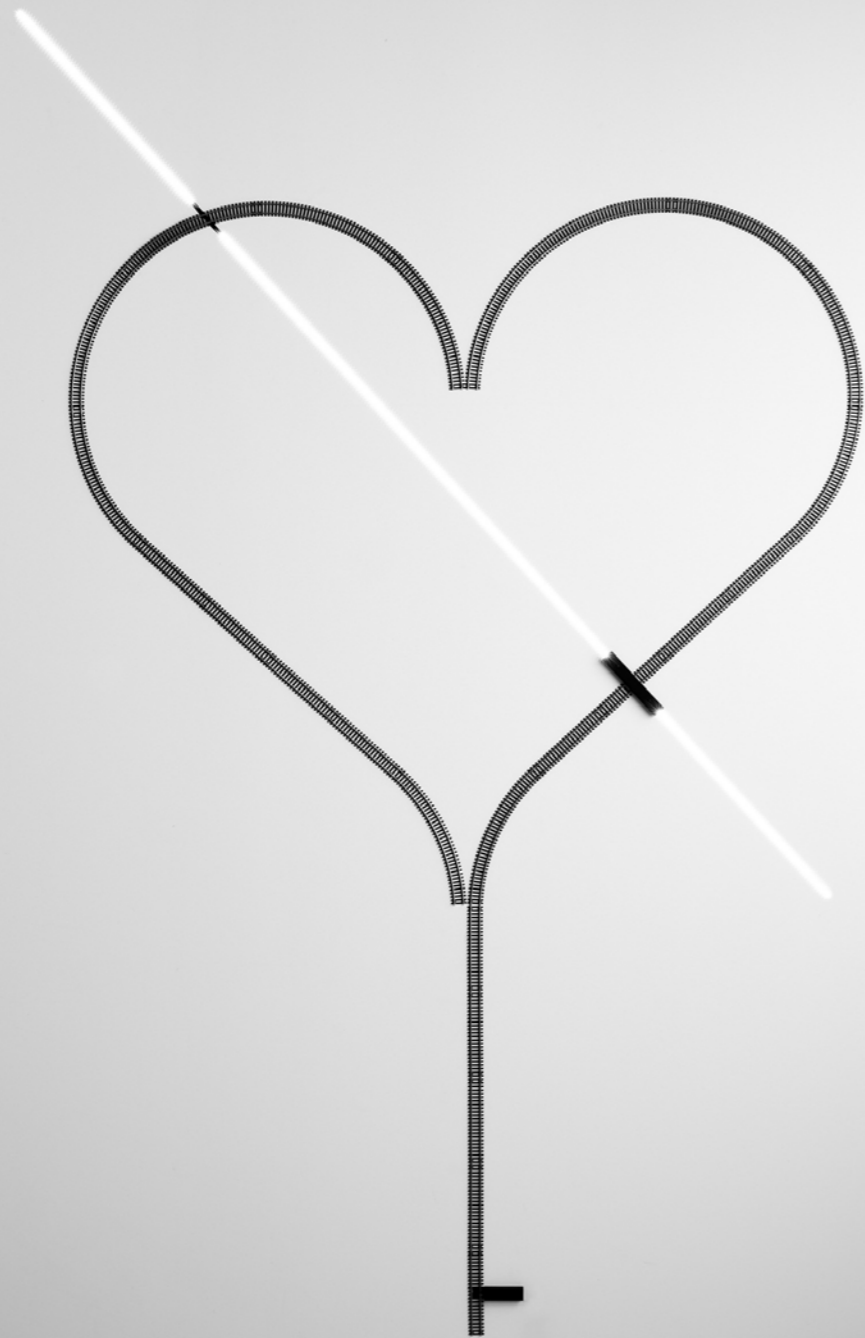

A ready-made project to design the space with a sense of irony and weightlessness.
The tracks of an electric train can be used to draw a heart,
but also to conduct electricity.
Rail is the boundary between usefulness and show, between art and design.


RAIL

Davide Groppi / 2019

Wall / Direct / Indoor

Material ABS - Metal
Finish .00 Standard

Note Black rails luminaire - Black cable.

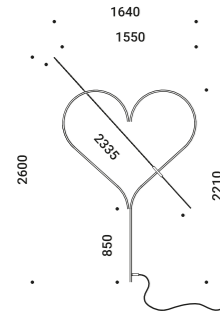


RAIL
22W
24V DC
3000K - 2000lm
CRI >90
Driver not included
◆ IP20

Standard - 3000K


1A3400008.30.20

Optional accessories

Drivers



Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

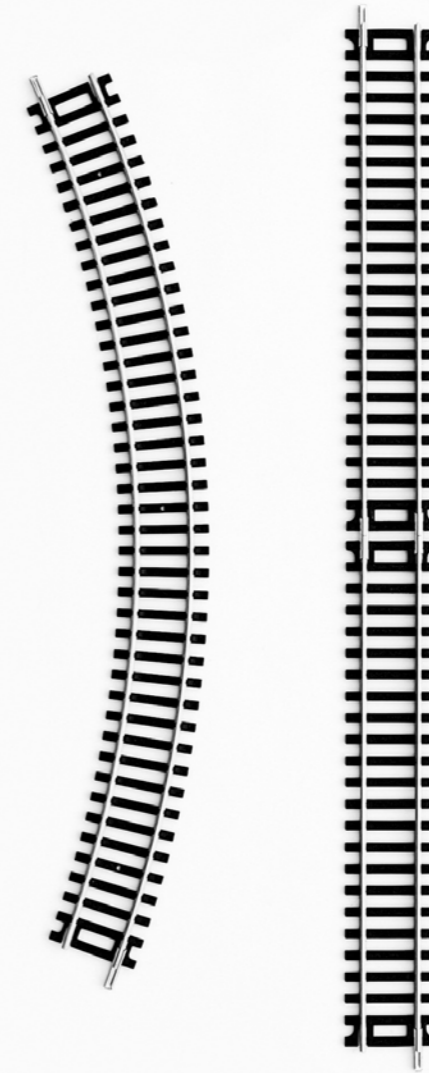



REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces and gives the eye
unprecedented perspectives, unexpected depths, illusions of light.
As if by magic, the lamp camouflages itself to give
unprecedented perspectives and illusions of light.


REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Luminaire with mirror top and black back side.



REFLEX


18W
 24V DC
 2700K - 2158lm / 3000K - 2320lm
 CRI >90
 Driver not included
 IP20

Matt Black - 2700K
 Matt Black - 3000K


1A0850408.27.20
 1A0850408.30.20

Optional accessories

Drivers



Driver LED		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260



Dimmable controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z0000034



CEILING



ASINTOTO


Davide Groppi / 2023

Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

Ceiling / Indirect / Indoor

Material Metal - Methacrylate
Finish .27 Gravity Black

Note Luminaire with black cable (1 m).



ASINTOTO


18W
 Max 500mA DC
 2700K - 1435lm / 3000K - 1478lm
 CRI >80
 Driver not included
 IP20

Gravity Black - 2700K
 Gravity Black - 3000K

1A4072708.27.00
 1A4072708.30.20

Compulsory accessories


Drivers



Driver LED		Not included
220-240V(100-127V)	500mA/35W(35W)/IP20/DALI	1Z0241140.500

Optional accessories

Installation kits



Circular plasterboard panel 12,5 mm		Not included
Standard	Cut-out 400 x 400 mm - Minimum space for mounting Ø 115 mm	1A4520000.00.00

Suspension kits



Recessed fixing kit for 12,5 mm plasterboard		Not included
Matt White	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece - Plasterboard cut-out Ø 44 mm - Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling fixing kit		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00



Wall back plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories



Magnetic weight		Not included
Matt Black	For sloped installation	1A4710400.00.00

RECESSED

DOT R

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - For installation: plasterboard cut-out 40 x 40 mm - Minimum space for mounting 85 mm.



DOT R

13W
 Max 350mA DC
 2700K / 3000K
 CRI 97
 Driver not included

Matt White - 2700K
 Matt White - 2700K
 Matt Black - 2700K
 Matt Black - 3000K

1A4770308.27.20
 1A4770308.30.20
 1A4770408.27.20
 1A4770408.30.20

Compulsory accessories


Other accessories




Lens	Not included		
Beam - 14°	2700K - CRI 97 - 983lm	DOT R	1A3090000.00.00
	3000K - CRI 97 - 1038lm		
Beam - 24°	2700K - CRI 97 - 943lm	DOT R	1A3100000.00.00
	3000K - CRI 97 - 996lm		
Beam - 36°	2700K - CRI 97 - 955lm	DOT R	1A3110000.00.00
	3000K - CRI 97 - 1005lm		
Beam - 50°	2700K - CRI 97 - 965lm	DOT R	1A3120000.00.00
	3000K - CRI 97 - 1016lm		

Optional accessories


Drivers



Driver LED	Not included	
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	1Z0240840.350




Driver LED	Not included	
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	1Z0240860.350



Driver LED	Not included	
220-240V	350mA/18W/IP20/TRIAC/IGBT	1Z0240740

Other accessories



Accessory holder + Honeycomb louvre	Not included	
		1X0080400.01.00



Elliptical filter	Not included	
Standard	Compulsory with 1X0080400.01.00	1X0080000.02.00



Blue filter	Not included	
Standard	Compulsory with 1X0080400.01.00	1X0080000.03.00




Red filter	Not included	
Standard	Compulsory with 1X0080400.01.00	1X0080000.04.00



Yellow filter	Not included	
Standard	Compulsory with 1X0080400.01.00	1X0080000.05.00

MIRA R

Omar Carraglia / 2015

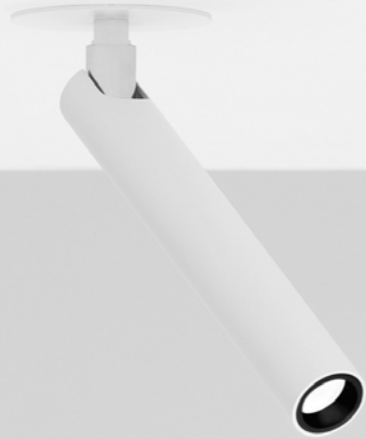

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - For installation: plasterboard cut-out 40 x 40 mm - Minimum space for mounting 85 mm.



MIRA R


5,6W
 Max 500mA DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K


1A3690308.27.20
 1A3690308.30.20
 1A3690408.27.20
 1A3690408.30.20

Optional accessories

Drivers



Driver LED	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH	1Z0240840.500



Driver LED	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0240860.500



An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source.

It's the end in that every time we look at Nulla, we feel as though we can't get it better than that. Nulla generates light and propagates mystery.

Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.


XXIII Compasso d'Oro ADI Award, 2014



Recessed / Direct / Indoor

Material Metal
Finish .00 Standard

Note Luminaire with Extradark comfort system - NULLA and NULLA 18: visible hole ø 18 mm - NULLA 25: visible hole ø 25 mm - NULLA 18 and NULLA 25: luminaire removable for maintenance.




NULLA - BEAM 23°

14W
 24V DC
 2700K - 425lm / 3000K - 458lm
 Beam 23°
 CRI >90
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A4100008.27.20
 1A4100008.30.20



NULLA - BEAM 32°

14W
 24V DC
 2700K - 538lm / 3000K - 579lm
 Beam 32°
 CRI >90
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A2110008.27.20
 1A2110008.30.20



NULLA 18 - BEAM 20°

4,5W
 24V DC
 2700K - 174lm / 3000K - 186lm
 Beam 20°
 CRI >90
 UGR <19
 Driver not included

◆ IP20

Standard - 2700K
 Standard - 3000K

1A2010008.27.20
 1A2010008.30.20



NULLA 25 - BEAM 23°

9W
 24V DC
 2700K - 304lm / 3000K - 327lm
 Beam 23°
 CRI >90
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A2020008.27.20
 1A4080008.30.20



NULLA 25 - BEAM 32°

9W
 24V DC
 2700K - 384lm / 3000K - 413lm
 Beam 32°
 CRI >90
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K


1A2020008.27.20
 1A2020008.30.20

Compulsory accessories


Installation kits



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 21 mm - Minimum space for mounting 100 mm - IP65	NULLA	1A2200400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 22 mm - Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm - Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm - Minimum space for mounting 190 mm	NULLA 25	1A3980400.00.00



Plasterboard flange (bottom) 12,5 mm Not included			
Matt Black		NULLA 25	1A4960400.00.00

Optional accessories


Installation kits




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 400 x 400 mm	NULLA	1A3790000.00.00




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 200 x 200 mm	NULLA	1A3780000.00.00




Masonry Box Not included			
	Dimensions 189 x 445 mm	NULLA 18	1A2390000.00.00



Concrete box Not included			
	Dimensions 189 x 445 mm	NULLA 18	1A2240000.00.00




Masonry Box Not included			
	Dimensions 189 x 445 mm	NULLA 25	1A2380000.00.00



Concrete box Not included			
	Dimensions 189 x 445 mm	NULLA 25	1A2230000.00.00

Drivers

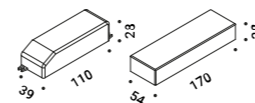

Driver LED + Controller Not included			
220-240V(100-127V)	24V/22W(12W)/IP20/TRIAC/IGBT	NULLA / NULLA 18 / NULLA 25	1Z0240410 + 1Z0000034

SYSTEMS




FLASH


Daide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length).
The ideal solution for direct illumination of spaces with very high ceilings.
Its name pays homage to the famous comic book superhero,
who can run seven times the speed of light.


How to order - FLASH 6

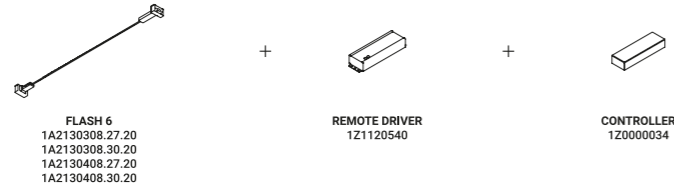

How to order - FLASH 12

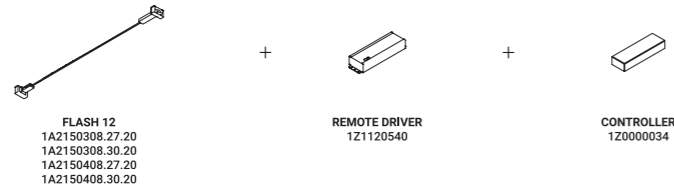


How to order - FLASH 18

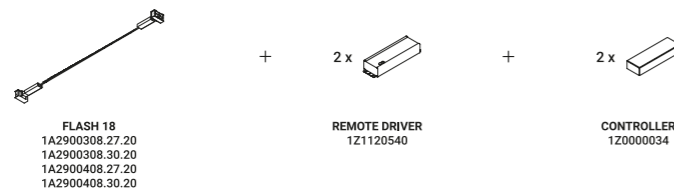

Wall-Systems / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black


Note LED module 6/12/18 m long available with double emission - LED module 5/10 m long with Tunable White technology available with double emission - Harmonic steel strip 10 mm wide - Can be cut every 96,6 mm.

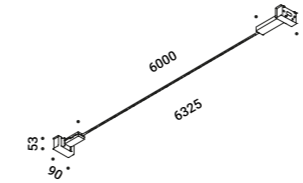

FLASH 6
Length 6000 mm
45W
24V DC
2700K - 5586lm / 3000K - 6708lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A2130308.27.20
1A2130308.30.20
1A2130408.27.20
1A2130408.30.20

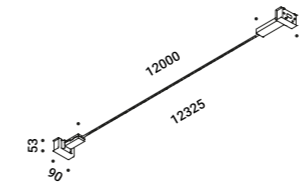

FLASH 12
Length 12000 mm
90W
24V DC
2700K - 11172lm / 3000K - 13416lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2150408.27.20
1A2150308.30.20
1A2150408.27.20
1A2150408.30.20

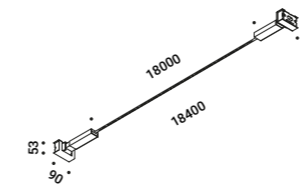


FLASH 18
Length 18000 mm
135W
24V DC
2700K - 16758lm / 3000K - 20124lm
CRI >90
Driver not included
◆ IP20



Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2900308.27.20
1A2900308.30.20
1A2900408.27.20
1A2900408.30.20

How to order -
FLASH 6 DE

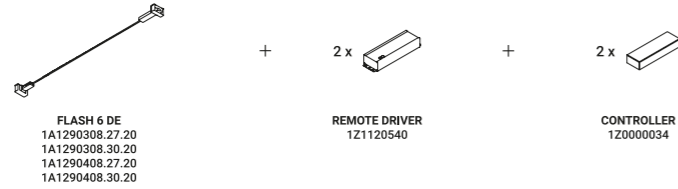

How to order -
FLASH 12 DE

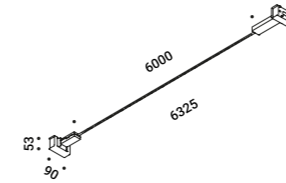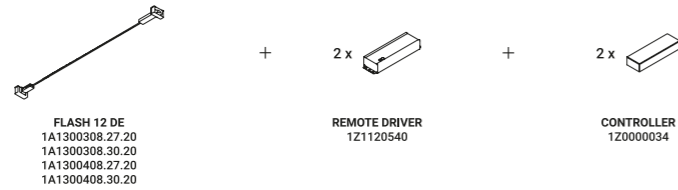


FLASH 6 DE

Length 6000 mm
Dual emission and double switch
90W
24V DC
2700K - Up 5586lm - Down 5586lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1290308.27.20
1A1290308.30.20
1A1290408.27.20
1A1290408.30.20

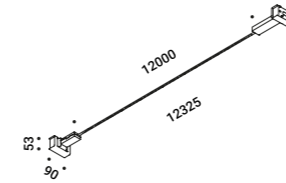


FLASH 12 DE

Length 12000 mm
Dual emission and double switch
180W
24V DC
2700K - Up 11172lm - Down 11172lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300308.27.20
1A1300308.30.20
1A1300408.27.20
1A1300408.30.20


How to order -
FLASH 5 TW

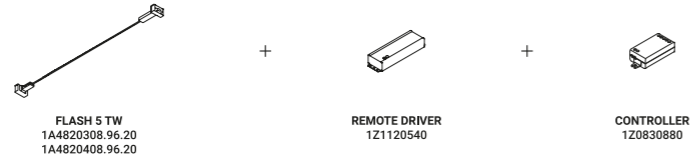

How to order -
FLASH 10 TW

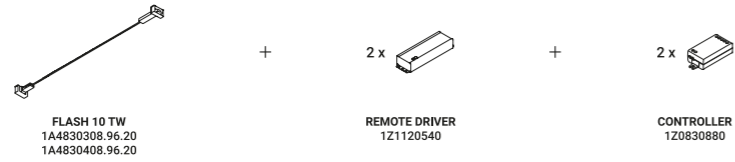


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

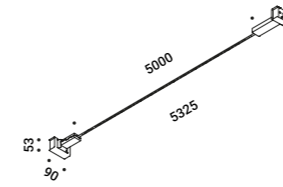

FLASH 5 TW
Length 5000 mm - Tunable White
50W
24V DC
2700/6500K - 7650lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4820308.96.20
1A4820408.96.20

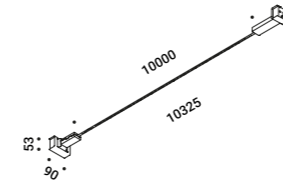


FLASH 10 TW
Length 10000 mm - Tunable White
100W
24V DC
2700/6500K - 15300lm
CRI >90
Driver not included
◆ IP20


Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4830308.96.20
1A4830408.96.20


How to order -
FLASH 5 DE TW

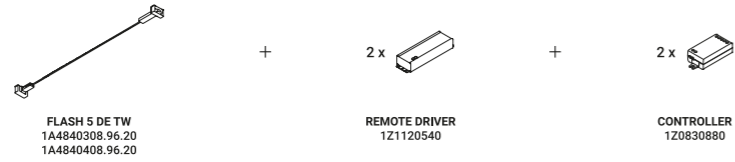

How to order -
FLASH 10 DE TW

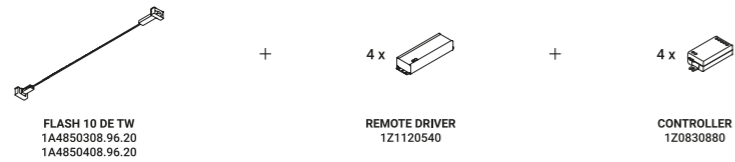


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

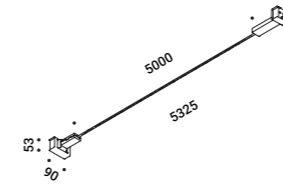

FLASH 5 DE TW
Length 5000 mm - Dual emission -
Tunable White
100W
24V DC
2700/6500K - 15300lm
CRI >90
Driver not included
IP20

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4840308.96.20
1A4840408.96.20

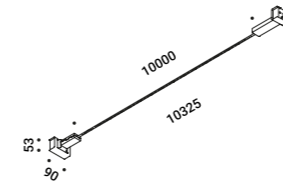


FLASH 10 DE TW
Length 10000 mm - Double output -
Tunable White
200W
24V DC
2700/6500K - 30600lm
CRI >90
Driver not included
IP20

Matt White - 2700/6500K
Matt Black - 2700/6500K


1A4850308.96.20
1A4850408.96.20

Optional accessories


Installation kits




Ceiling connection kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00




Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00




Swallows	Not included
Matt Black	1A0800400.00.00

Optional accessories


Drivers




Driver LED			Not included
100-240V	24V/96W/IP67/1-10V	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120540




Dimmable controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE	1Z0000034




Controller Casambi - Tunable white			Not included
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z0830880

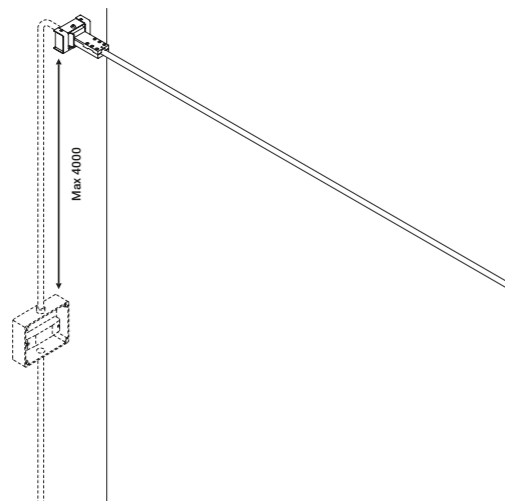


Remote power supply kit

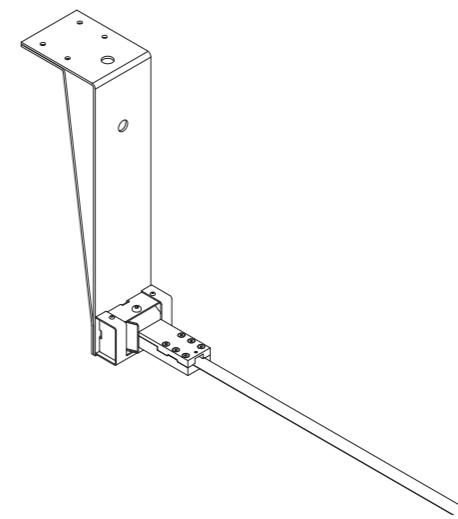


1A0080400.00.00 - Ceiling connection kit

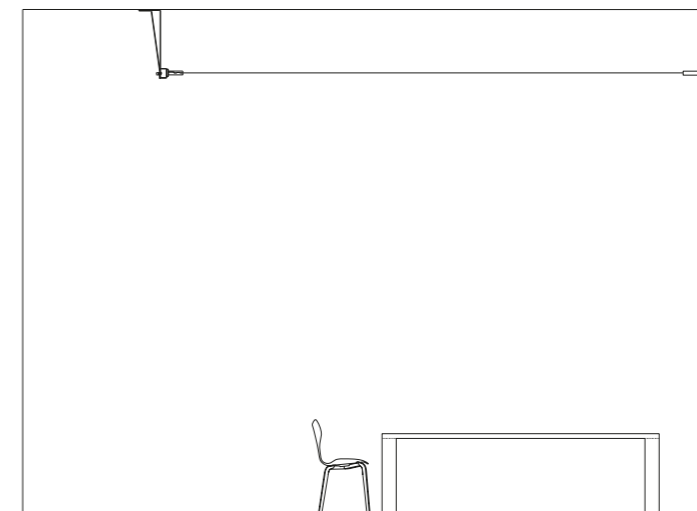


1A0080400.00.00 - Example of installation with ceiling connection kit

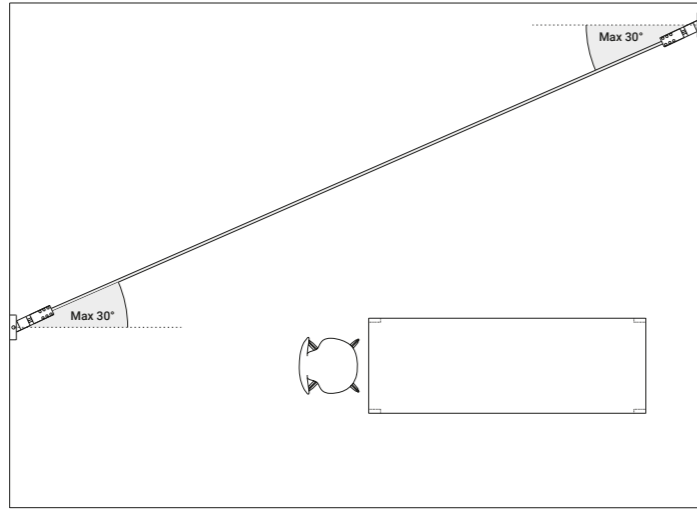

Example of installation

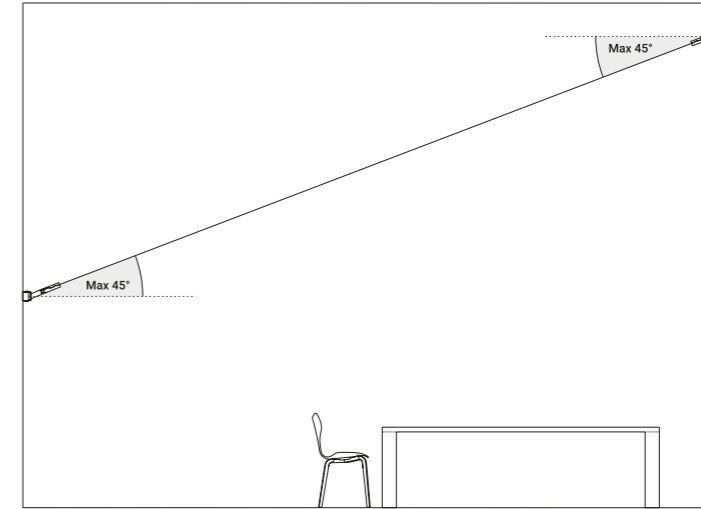

1A0120400.00.00 - Kit wall connection vertical sloped 45°

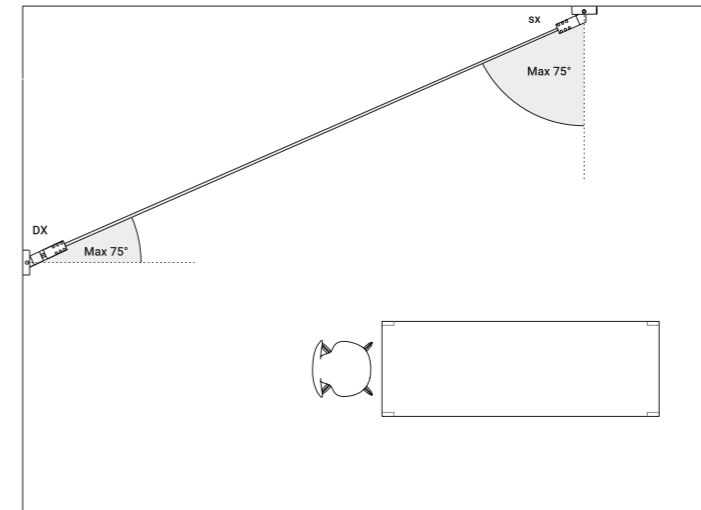

1A0340400.00.00 - 1A0350400.00.00 - Kit wall connection sloped 75°



INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.

An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor.

It comes in strips up to 36 metres in length (standard versions at 6 / 12 metres in length).

Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.

This project pays homage to the art of Lucio Fontana and his spatial concepts.

The graphic force of this system is surprising.


It can be integrated into space, but at the same time it becomes part of that space.

Infinito: essence and absence.


Archiproducts Design Award 2017

People's Choice AZ Award 2017


How to order - INFINITO 6

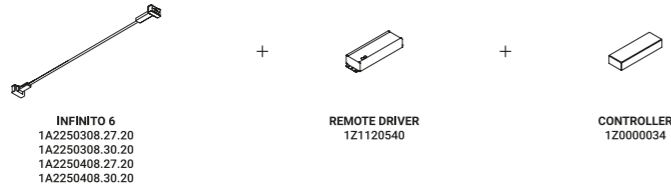

How to order - INFINITO 12

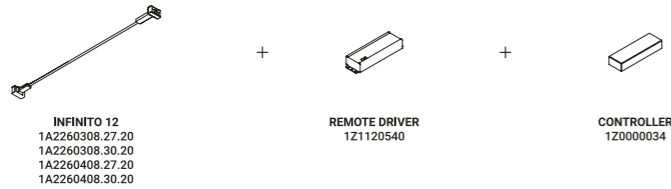


How to order - INFINITO 18

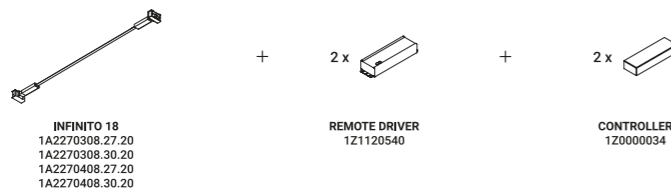

Wall-Systems / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black


Note LED module 6/12/18 m long - LED module 5/10 m long with Tunable White technology - Harmonic steel strip 19 mm wide - Can be cut every 96,6 mm.

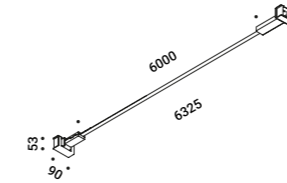

INFINITO 6
Length 6000 mm
45W
24V DC
2700K - 5586lm / 3000K - 6708lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A2250308.27.20
1A2250308.30.20
1A2250408.27.20
1A2250408.30.20

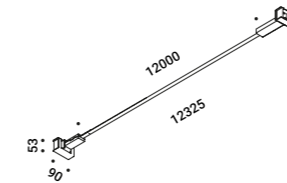

INFINITO 12
Length 12000 mm
90W
24V DC
2700K - 11172lm / 3000K - 13416lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2260408.27.20
1A2260308.30.20
1A2260408.27.20
1A2260408.30.20

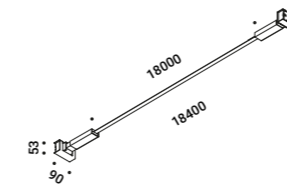

INFINITO 18
Length 18000 mm
135W
24V DC
2700K - 16758lm / 3000K - 20124lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2270308.27.20
1A2270308.30.20
1A2270408.27.20
1A2270408.30.20

How to order -
INFINITO 5 TW



INFINITO 5 TW
1A4860308.96.20
1A4860408.96.20

+



REMOTE DRIVER
1Z1120540

+



CONTROLLER
1Z0830880

How to order -
INFINITO 10 TW



INFINITO 10 TW
1A4870308.96.20
1A4870408.96.20

+




2 x
REMOTE DRIVER
1Z1120540

+



2 x
CONTROLLER
1Z0830880


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

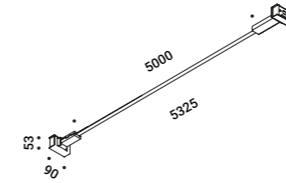

INFINITO 5 TW
Length 5000 mm - Tunable White
50W
24V DC
2700/6500K - 7650lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4860308.96.20
1A4860408.96.20

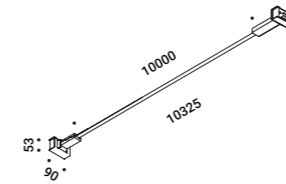


INFINITO 10 TW
Length 10000 mm - Tunable White
100W
24V DC
2700/6500K - 15300lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700/6500K
Matt Black - 2700/6500K


1A4870308.96.20
1A4870408.96.20

Optional accessories


Installation kits




Ceiling connection kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00




Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00




Swallows	Not included
Matt Black	1A0800400.00.00

Optional accessories


Drivers




Driver LED	Not included		
100-240V	24V/96W/IP67/1-10V	INFINITO 6 / INFINITO 12 / INFINITO 18 / INFINITO 5 TW / INFINITO 10 TW	1Z1120540




Dimmable controller	Not included		
	DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / INFINITO 18	1Z0000034




Controller Casambi - Tunable white	Not included		
		INFINITO 5 TW / INFINITO 10 TW	1Z0830880

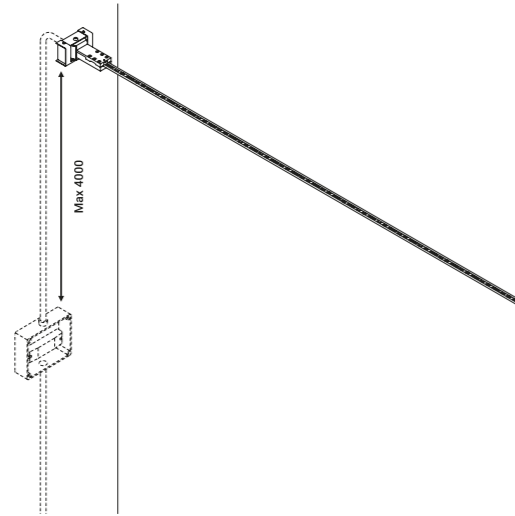


Kit di alimentazione remoto

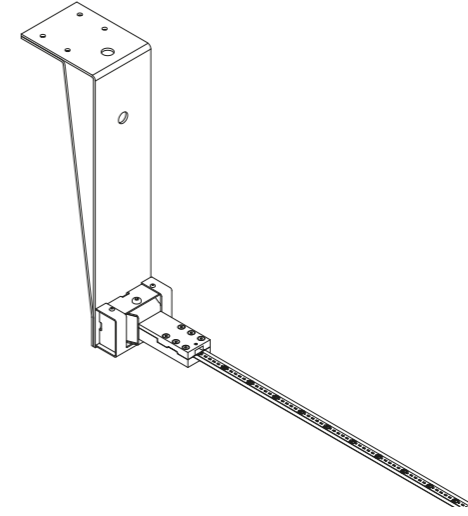


1A0080400.00.00 - Ceiling connection kit

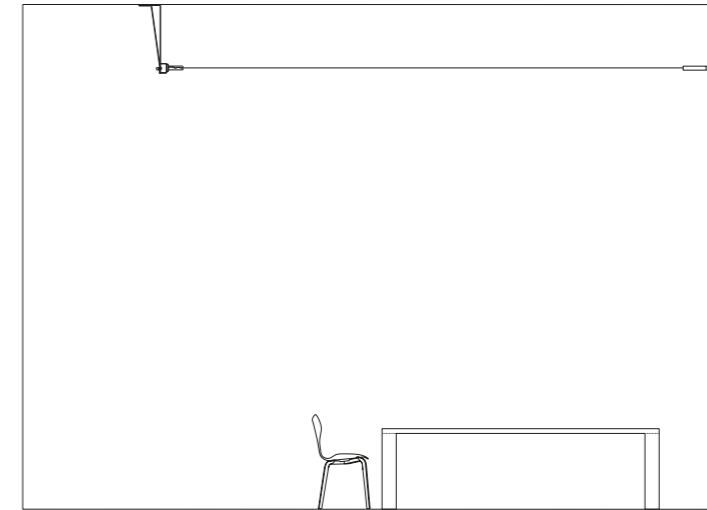


1A0080400.00.00 - Example of installation with ceiling connection kit

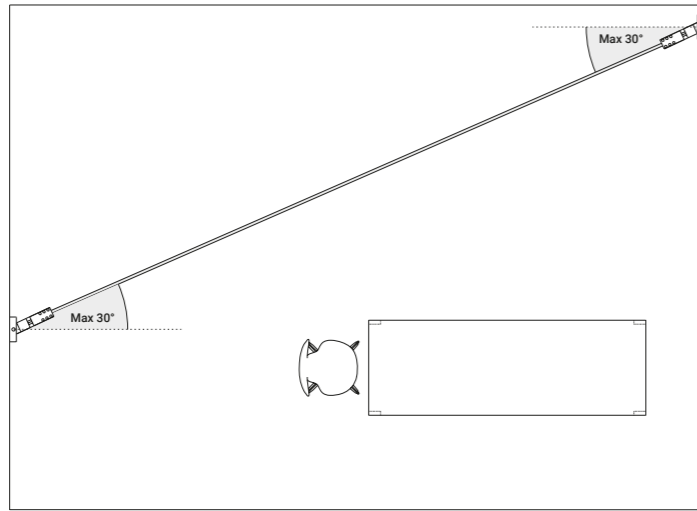


Example of installation

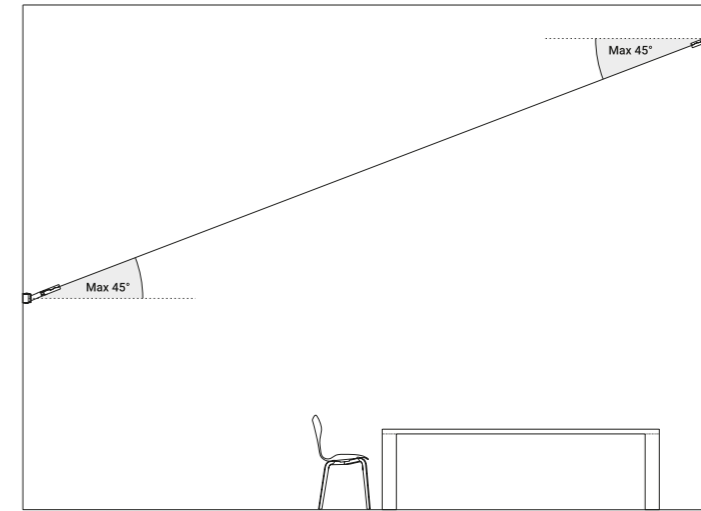

1A0120400.00.00 - Kit wall connection vertical sloped 45°

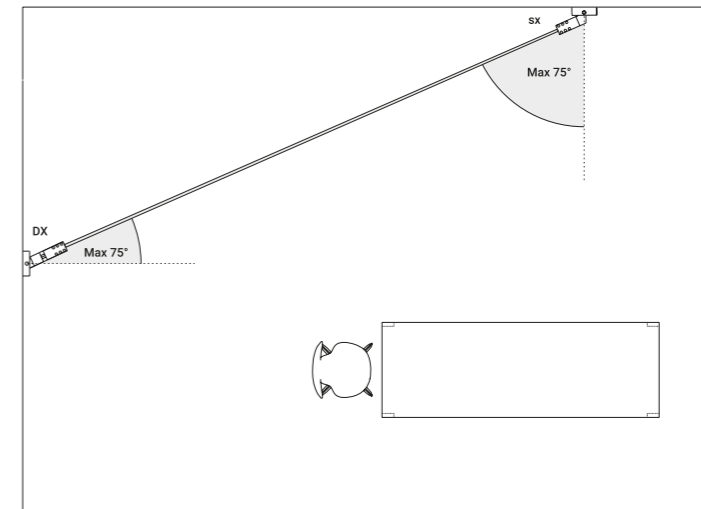

1A0340400.00.00 - 1A0350400.00.00 - Kit wall connection sloped 75°

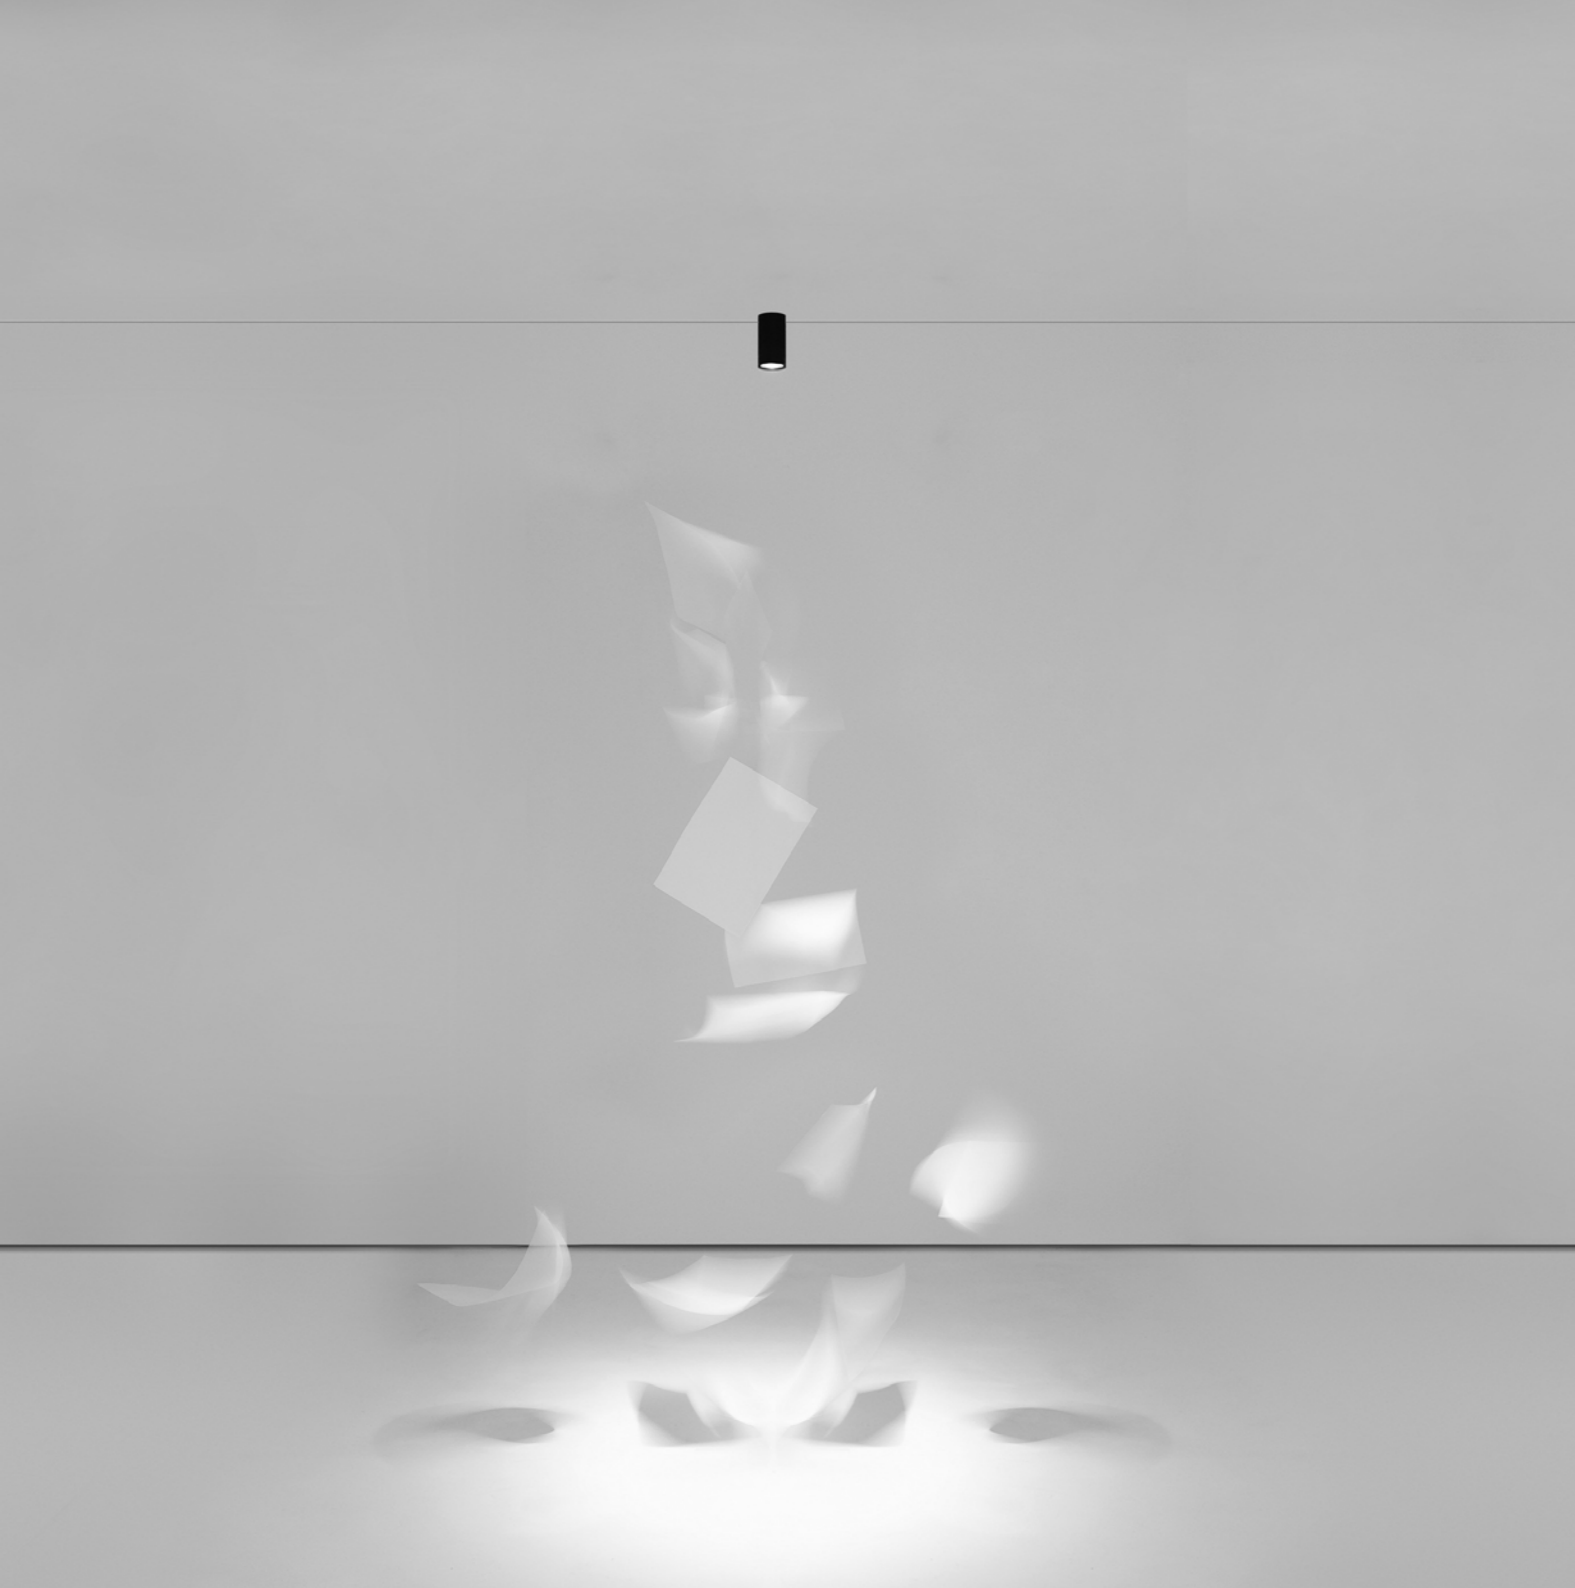

Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope,
the light reaches everywhere, weightless and wonderful.

Ohm is an electro mechanic project that takes maximum advantage
of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.


Where the light comes from is discreetly hidden,
giving all the attention to what it is illuminating.

New accessories allow the suspended installation.


It is possible to replace the light source even with the luminaire assembled.

Ohm has been selected by the ADI Permanent Design Observatory
to be shown at the ADI Design Index 2020.

Remote driver version

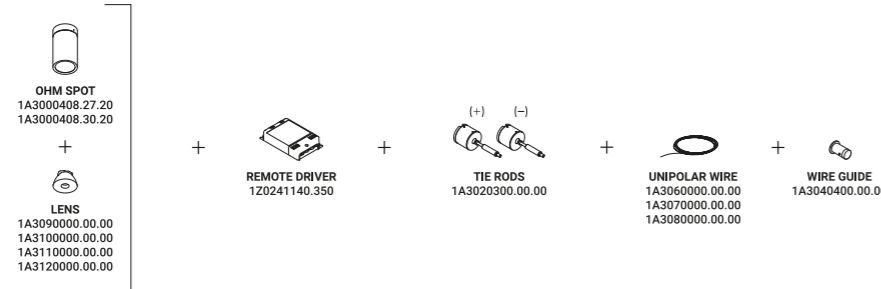


Suspension version

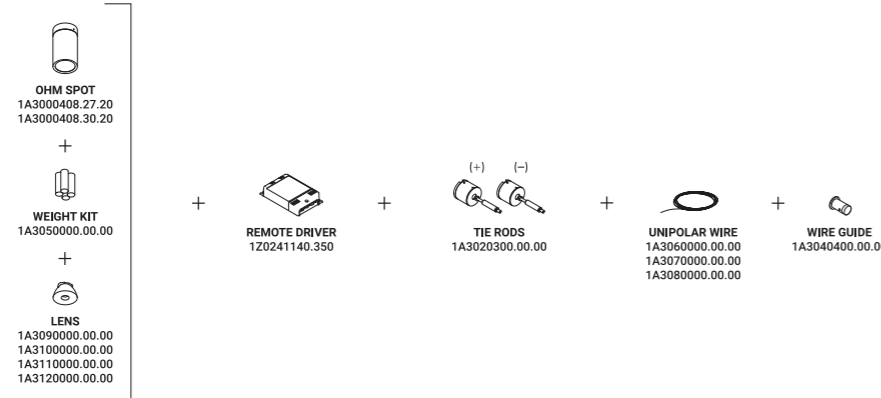

Systems / Direct / Indoor

Material Metal - PA
Finish .04 Matt Black

Note Special single-pole cable running between two walls and ceiling - Max 4 Spot on unipolar wire.




OHM SPOT
3,2W
Max 350mA DC
2700K / 3000K
CRI 95
Driver not included

Matt Black - 2700K
Matt Black - 3000K

1A3000408.27.20
1A3000408.30.20

Compulsory accessories

Installation kits



Tie rods		Not included
Matt White	2 Pieces	1A3020300.00.00
Unipolar wire - 12 m		Not included
	Max 60V DC	1A3060000.00.00
Unipolar wire - 24 m		Not included
	Max 60V DC	1A3070000.00.00
Unipolar wire - 48 m		Not included
	Max 60V DC	1A3080000.00.00

Compulsory accessories


Other accessories



Lens		Not included	
Beam - 12°	2700K - CRI 95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI 95 - 288lm		
Beam - 24°	2700K - CRI 95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI 95 - 286lm		
Beam - 39°	2700K - CRI 95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI 95 - 273lm		
Beam - 54°	2700K - CRI 95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI 95 - 270lm		

Optional accessories

Installation kits



Wall back plate		Not included	
Matt White	For mounting on brick masonry walls	1A3030300.00.00	




Wire guide		Not included	
Matt Black	1 Piece	1A3040400.00.00	




Weight kit for suspension version		Not included	
	4 Pieces	1A3050000.00.00	

Drivers




Driver LED		Not included	
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350	




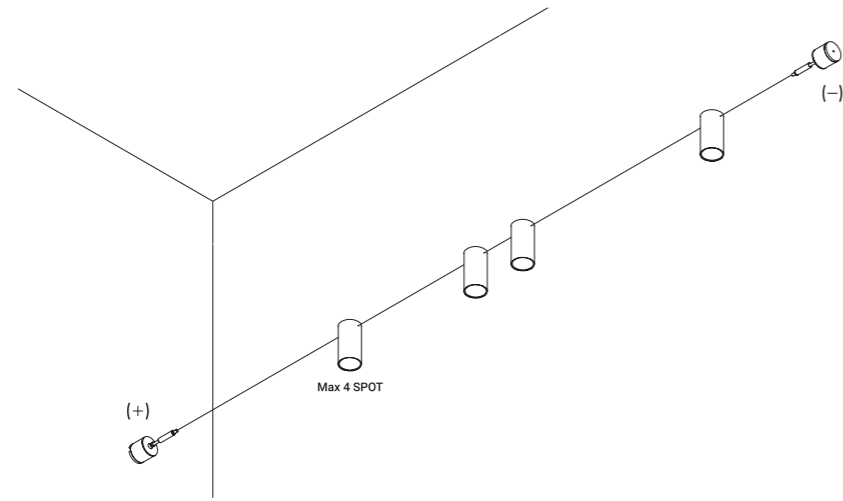


Remote driver version

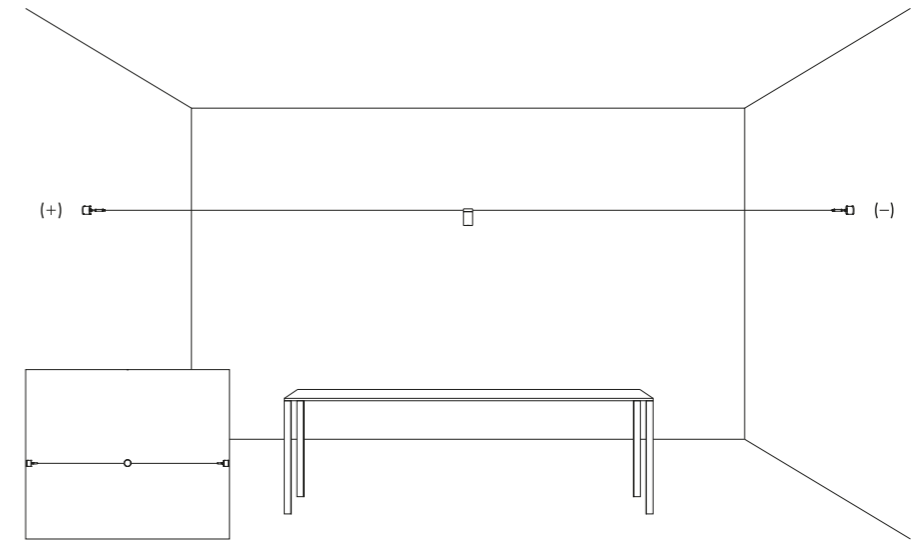


Remote driver layout example

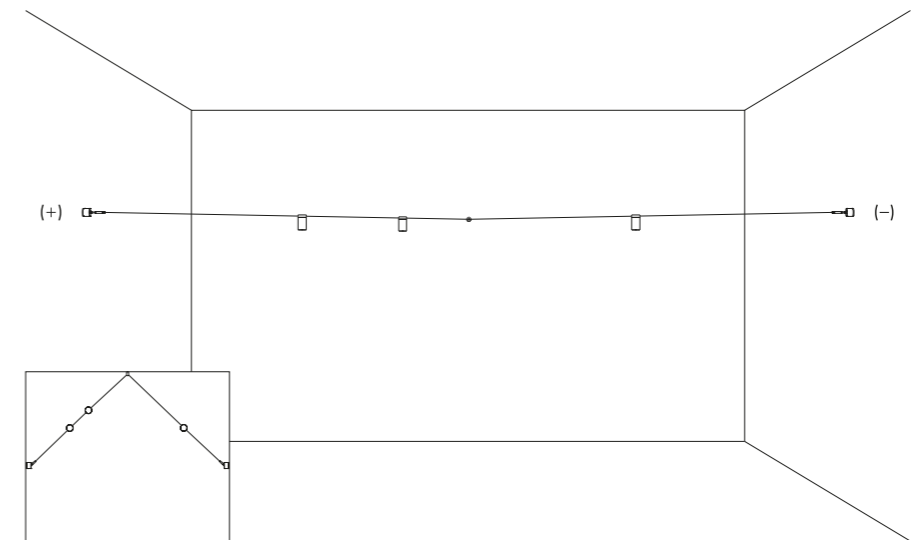

Remote driver layout example

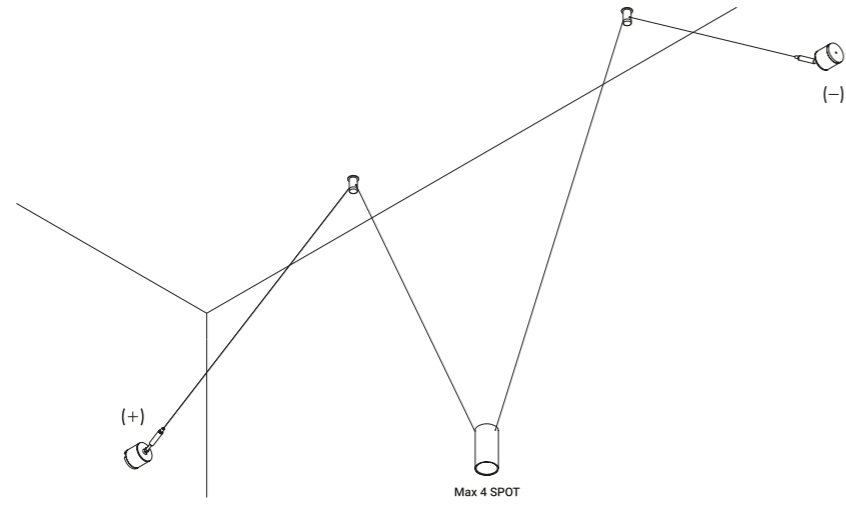

Suspension version

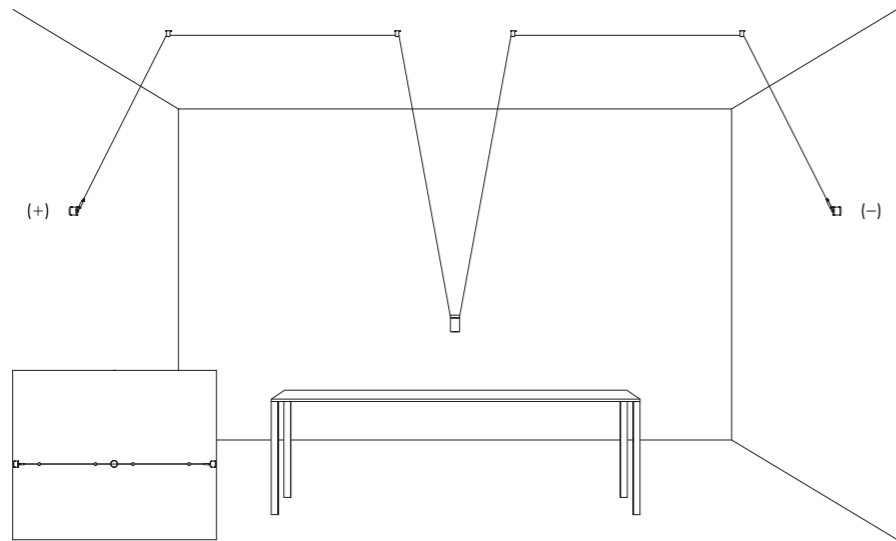

Suspension layout example






Utopia is a project on the limit state of light, the research for the minimum dimension necessary for pure and essential lighting. It represents full flexibility, in both its design and its light control. The light strip reaches into space, bending, breaking and drawing abstract, mysterious patterns.

Systems / Indirect / Indoor

Material Metal
Finish .00 Standard

Note Dimmable wall luminaire.

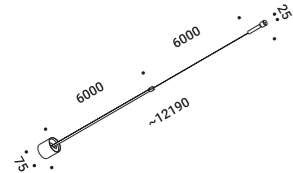


UTOPIA 6

Length 6000 mm
 79W
 24V DC
 2700K - 6079lm / 3000K - 6322lm
 CRI >90
 Driver not included
 IP20

Standard - 2700K
 Standard - 3000K

1A4250008.27.20
 1A4250008.30.20

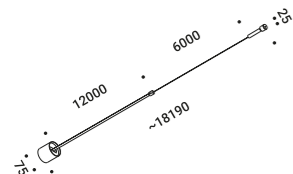

UTOPIA 12

Length 12000 mm
 125W
 24V DC
 2700K - 10133lm / 3000K - 10538lm
 CRI >90
 Driver not included
 IP20

Standard - 2700K
 Standard - 3000K


1A4600008.27.20
 1A4600008.30.20

Optional accessories

Installation kits




Accessory 1	Not included
Polished Chrome	1A4480100.00.00




Accessory 2	Not included
Polished Chrome	1A4490100.00.00

Drivers



Driver LED	Not included		
100-240V	24V/150W/IP67/1-10V	UTOPIA 6 / UTOPIA 12	1Z1120500




Dimmable controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	
	1Z0000034

TRACKS - PROFILES




Pure line in space.
Our Sistema track holds the light solution Dot.

Power right connector and power left connector installation

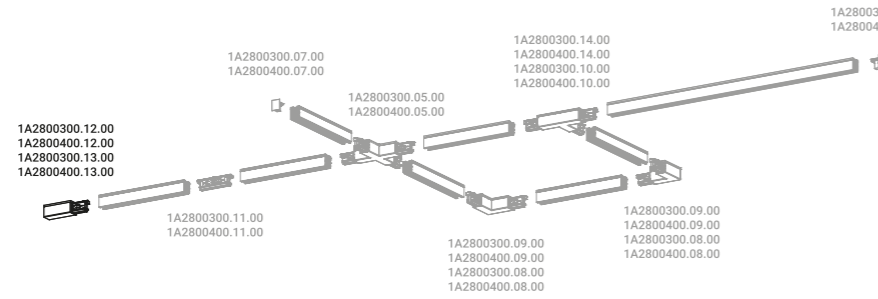

Power intermediate connector installation

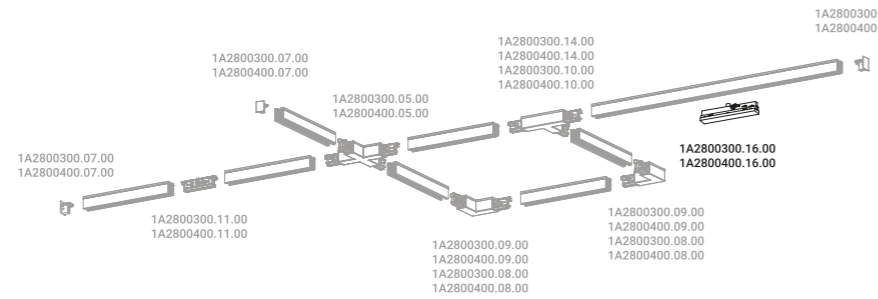

Systems / Diffuse / Indoor

Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black

Note Wall and ceiling track with white.



DOT BINARIO 51

Max 10W

220V

Bulb not included

ON/OFF

IP20

Matt White - ON/OFF


Matt Black - ON/OFF

1A3710308.00.00

1A3710408.00.00

Compulsory accessories


Installation kits



Track 1m Not included

Matt White 1A2800300.01.00


Matt Black 1A2800400.01.00



Track 2m Not included

Matt White 1A2800300.02.00

Matt Black 1A2800400.02.00



Track 3m Not included

Matt White 1A2800300.03.00

Matt Black 1A2800400.03.00






End cap Not included

Matt White 1A2800300.07.00

Matt Black 1A2800400.07.00







Compulsory accessories

Drivers

	Power right connector		Not included
	Matt White	1A2800300.13.00	
	Matt Black	1A2800400.13.00	
	Power left connector		Not included
	Matt White	1A2800300.12.00	
	Matt Black	1A2800400.12.00	
	Power intermediate connector		Not included
	Matt White	1A2800300.16.00	
	Matt Black	1A2800400.16.00	






Optional accessories

Installation kits

	Linear connector		Not included
	Matt White	1A2800300.11.00	
	Matt Black	1A2800400.11.00	
	Internal L connector		Not included
	Matt White	1A2800300.09.00	
	Matt Black	1A2800400.09.00	
	External L connector		Not included
	Matt White	1A2800300.08.00	
	Matt Black	1A2800400.08.00	
	Right T connector		Not included
	Matt White	1A2800300.14.00	
	Matt Black	1A2800400.14.00	
	Left T connector		Not included
	Matt White	1A2800300.10.00	
	Matt Black	1A2800400.10.00	
	X connector		Not included
	Matt White	1A2800300.15.00	
	Matt Black	1A2800400.15.00	


Optional accessories

Installation kits

	Adjustable suspension cable		Not included
	Lenght 1500mm		1A2800000.04.00
	Adjustable suspension cable		Not included
	Lenght 3000mm		1A2800000.05.00
	Adjustable suspension cable		Not included
	Lenght 5000mm		1A2800000.06.00
	Clamp for track		Not included
			1A2800300.17.00
Bulbs	LED - GU10 - PAR16		Not included
	220-240V - 5,5W - 25° - 3000K - 375lm - CRI 97 - Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500
	LED SORAA - GU10 - MR16		Not included
	230V - 7,5W - 10° - 2700K - 390lm - CRI 95 - Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210
	LED SORAA - GU10 - MR16		Not included
	230V - 7,5W - 10° - 3000K - 410lm - CRI 95 - Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010


Optional accessories

Other accessories




Darklight Not included

MR16	LED SORAA - GU10	1Y1580040
------	------------------	-----------



25° beam filter Not included

MR16	LED SORAA - GU10	1Y1580020
------	------------------	-----------



36° beam filter Not included

MR16	LED SORAA - GU10	1Y1580030
------	------------------	-----------



OUTDOOR



BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.
A study of camouflage. The reflective surface is used as a tool
to camouflage and hide the machine to create light.
The reflection of the environment makes the luminaire invisible.


BELLADINOTTE

Maurizio Mancini / 2012

Floor-Outdoor / Indirect / Outdoor

Material Metal
 Finish .00 Standard

Note Adjustable luminaire with mirror top - Green back side - Black cable (5 m).



BELLADINOTTE

2x4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 ◆ IP67

Standard - 2700K
 Standard - 3000K

1A3560008.27.20
 1A3560008.30.20


Optional accessories

Installation kits



Driver connector IP68		Not included
1 Piece	1A1660000.00.00	

Drivers



Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





BUBKA


Daniele Sprega / 2014

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path or emphasising
the hierarchies of spaces and functions.

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Adjustable luminaire with AISI 316L Stainless steel stem - Black cable (7 m).



BUBKA


8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included
 IP65

Standard - 2700K
 Standard - 3000K

1A3600008.27.20
 1A3600008.30.20

Optional accessories

Installation kits



Anchoring bolt Not included


Cut-out Ø 250 mm -
 Minimum space for mounting 350 mm 1A3620000.00.00



Driver connector IP68 Included

1 Piece 1A1660000.00.00

Lighting modules




Additional LED head Not included

Matt Black 1A3610408.27.20
 Max 700mA DC - 8,4W -
 2700K - 350lm - CRI>90
1A3610408.30.20
 Max 700mA DC - 8,4W -
 3000K - 350lm - CRI>90

Optional accessories

Drivers



Driver box Not included

Input 110-240V - 50/60Hz -
 Output 700mA - 20W - IP65 - DALI 1A3880008.700



BUBKA BOLLARD

Daniele Sprega / 2021

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path or emphasising
the hierarchies of spaces and functions.


BUBKA BOLLARD

Daniele Sprega / 2021

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Adjustable luminaire with AISI 316L Stainless steel stem - Black cable (9 m).



BUBKA BOLLARD


8,4W
 Max 700mA DC
 2700K - 350lm / 3000K - 350lm
 CRI >90
 Driver not included
 IP65

Standard - 2700K
 Standard - 3000K

1A1440008.27.20
 1A1440008.30.20

Optional accessories

Installation kits



Anchoring bolt Not included


Cut-out Ø 250 mm -
 Minimum space for mounting 350 mm 1A3620000.00.00



Driver connector IP68 Included

1 Piece 1A1660000.00.00

Lighting modules



Additional LED head Not included


Matt Black 1A3610408.27.20
 Max 700mA DC - 8,4W -
 2700K - 350lm - CRI>90
1A3610408.30.20
 Max 700mA DC - 8,4W -
 3000K - 350lm - CRI>90

Daniele Sprega / 2021

BUBKA BOLLARD

Optional accessories

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz - Output 350mA - 17W - IP65 - DALI	1A3880008.350



GRILLO

Daniele Sprega / 2012

A small luminous elf that you can install in your garden or inside a vase.
A thin stem stuck into the ground and a little adjustable LED projector.
For illuminating a flower, a plant or simply to accompany us along a path.
Lamp with spike.

GRILLO


Daniele Sprega / 2012

Floor-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .04 Matt Black

Note Adjustable luminaire with AISI 316L Stainless steel stem.

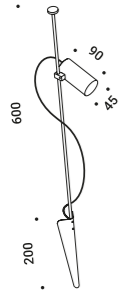

GRILLO

4,2W

24V DC

2700K - 262lm / 3000K - 282lm

CRI >90

Driver not included

◆ IP67

Matt Black - 2700K

Matt Black - 3000K

1A3570408.27.20

1A3570408.30.20

Optional accessories

Installation kits



Additional stem 1 m

Not included

Standard

AISI 316L stainless steel

1A3590000.00.00




Driver connector IP68

Included

1 Piece

1A1660000.00.00

Lighting modules



Additional LED head

Not included

Matt Black


24V DC - 4,2W - 2700K - 262lm - CRI>90

1A3580408.27.20

24V DC - 4,2W - 3000K - 282lm - CRI>90

1A3580408.30.20

Drivers



Driver LED

Not included

110-240V

24V/25W/IP67/ON/OFF

1Z1120620





IMU


Omar Carraglia / 2013

Light has found a home.
A lamp designed to welcome, illuminating the entrance.

Wall-Outdoor / Direct / Outdoor

Material Metal
 Finish .00 Standard

Note Matt black luminaire with matt red top.



IMU
 5,5W
 Max 350mA DC
 3000K - 306lm
 CRI >80
 Driver not included
 IP65

Standard - 3000K

1A3550008.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz - Output 350mA - 17W - IP65 - DALI	1A3880008.350





NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.
A simple project: a cable and a LED.
Indoor version available.


NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .04 Matt Black .32 Copper Oxide

Note Luminaire with black cable (10 m).



NEURO OUTDOOR

3,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 IP67

Matt Black - 2700K
 Matt Black - 3000K
 Copper Oxide - 2700K
 Copper Oxide - 3000K

1A4030408.27.20
 1A4030408.30.20
 1A4033208.27.20
 1A4033208.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver LED	Not included
110-240V 24V/25W/IP67/ON/OFF	1Z1120620





NUIT


Maurici Ginés / 2023

Night has always been a source of inspiration.
We walk, and we are not alone.
Nuit is a small travel companion that draws our night-time journeys.

Outdoor-Wall / Diffuse / Indoor-Outdoor

Material	Metal		
Finish	.03 Matt White	.27 Gravity Black	.38 Blasted Inox

Note Semi-recessed luminaire - For installation: minimum space for mounting 55 mm.




NUIT

1W
 24V DC
 2700K - 45lm / 3000K - 50lm
 CRI 90
 Driver not included
 IP65

Matt White - 2700K	1A1320308.27.20
Matt White - 3000K	1A1320308.30.20
Gravity Black - 2700K	1A1322708.27.20
Gravity Black - 3000K	1A1322708.30.20
Blasted Inox - 2700K	1A1323808.27.20
Blasted Inox - 3000K	1A1323808.30.20

Compulsory accessories


Installation kits




Concrete box	Not included
	1A4460000.00.00

Optional accessories

Installation kits




Plasterboard frame 12,5 mm	Not included
Matt White	Cut-out 100 x 100 mm - Minimum space for mounting 120 mm
	1A4470000.00.00



Adapter plasterboard frame 25 mm	Not included
Standard	1A5030000.00.00

Optional accessories

Drivers



Driver LED	Not included
110-240V	24V/25W/IP67/ON/OFF 1Z1120620



ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source.

It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.

Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Indoor version available.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**


ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

Material Glass fiber - Metal
Finish .04 Matt Black

Note Luminaire with black cable (5 m).

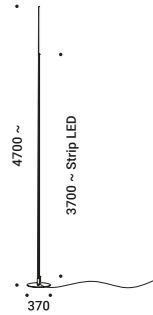

ORIGINE OUTDOOR

35W
 24V DC
 2700K - 2872lm / 3000K - 2930lm
 CRI >80
 Driver not included
 IP65

Matt Black - 2700K
 Matt Black - 3000K

1A2480408.27.20
 1A2480408.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver LED			Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260	





Q²


Alberto Zattin / 2006

A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes and architecture
in an unusual and sometimes unprecedented way.
Indoor version available.

Floor-Outdoor / Direct / Outdoor

Material Cement - Metal
 Finish .00 Standard

Note Luminaire with black cable (2,5 m).



Q²
 20W
 Max 500mA DC
 3000K - 2058lm
 CRI >90
 Driver not included
 IP67

Standard - 3000K

1A1150008.30.20


Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz - Output 500mA - 17W - IP65 - DALI	1A3880008.500

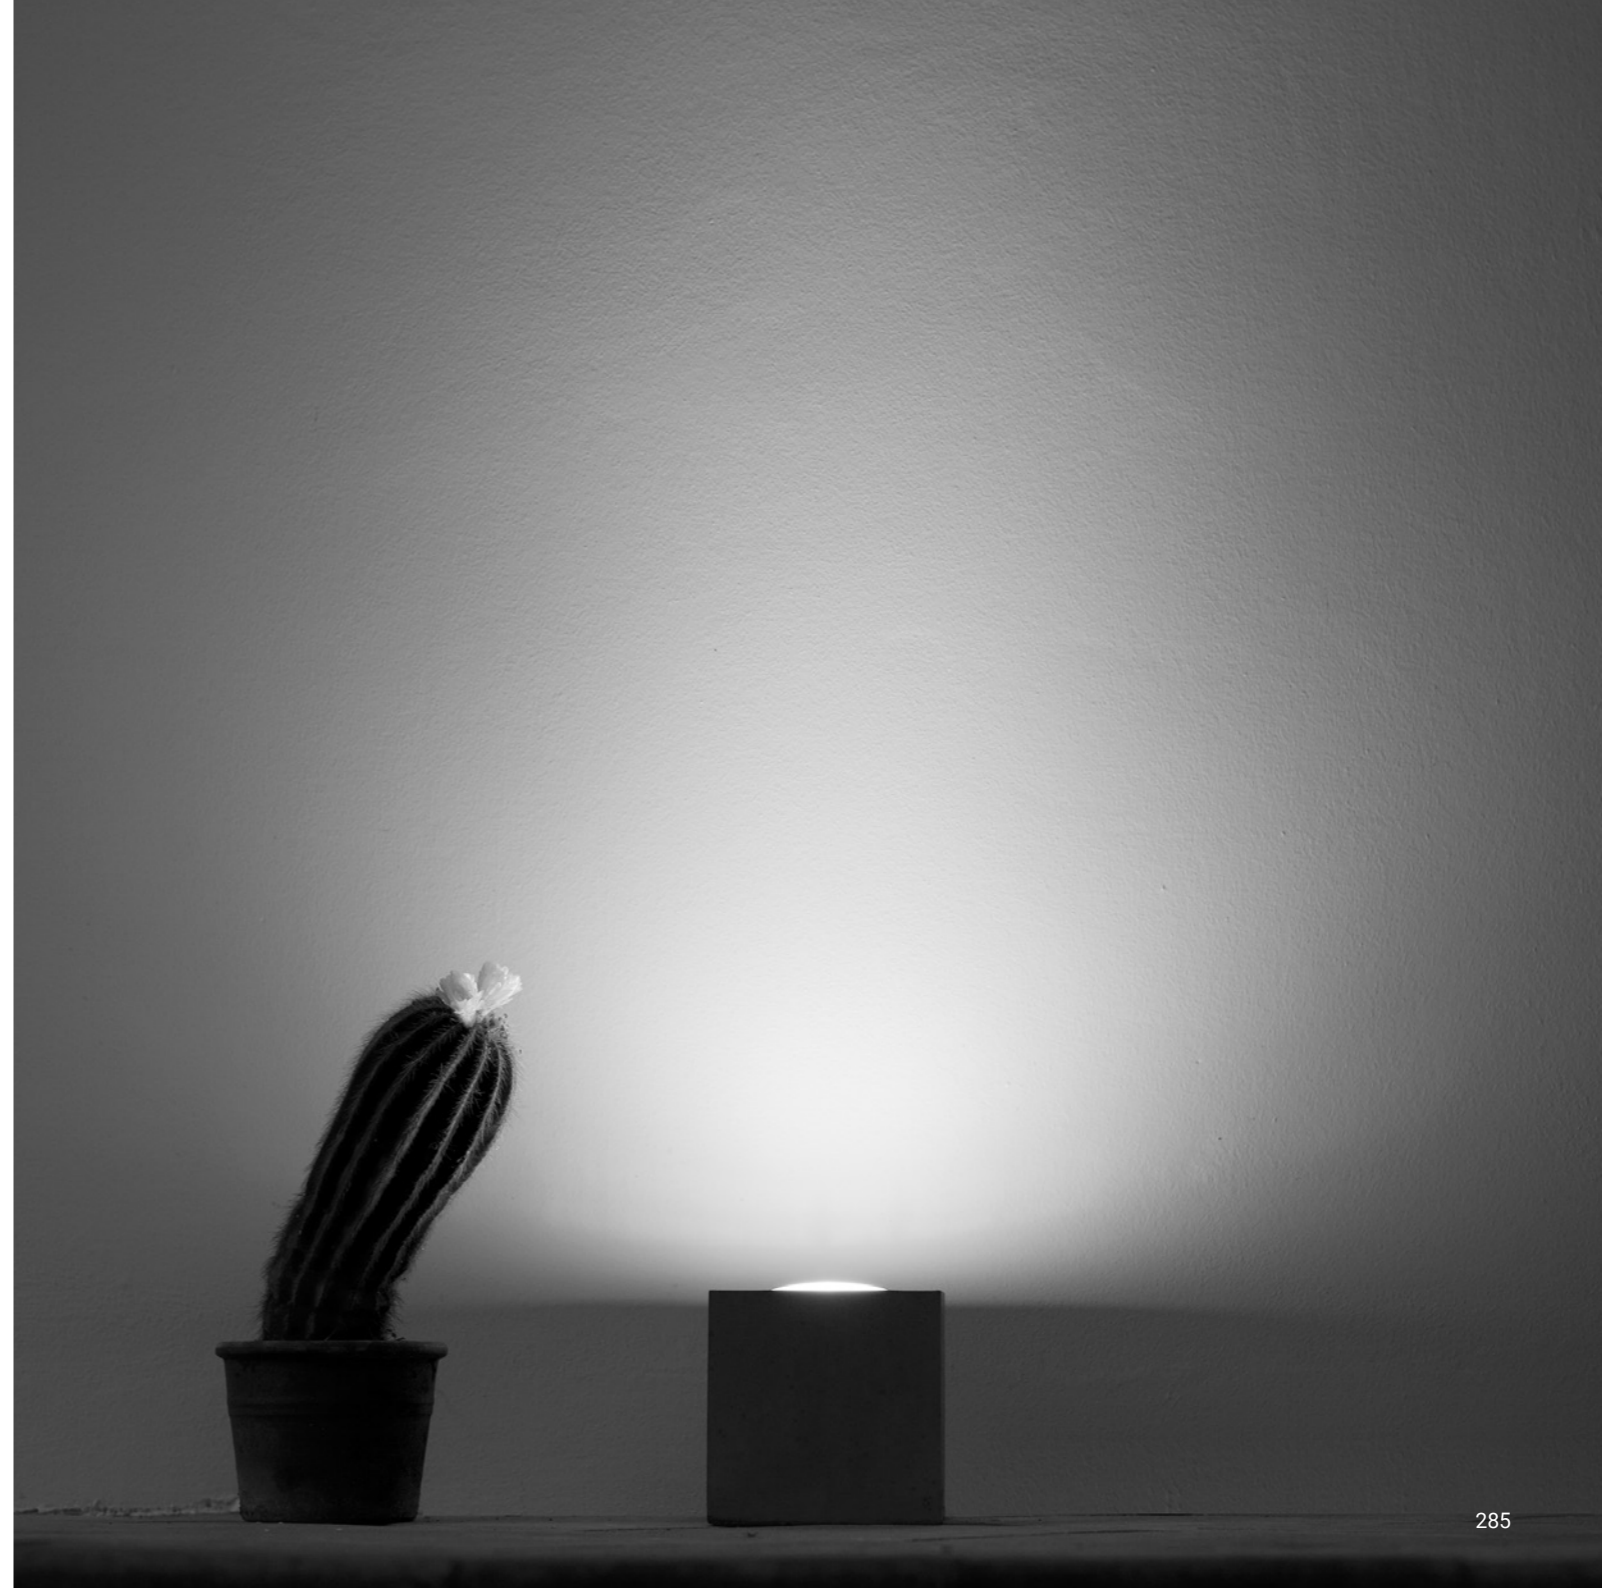

SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011



A special project, an authentic ready-made.
Obtained from a fishing flexible rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.

Sampei is an unexpected gift, it is the magic of looking up,
using light as a hook, and being amazed by so much weightlessness.
Indoor version available.


SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

Material Glass fiber - Metal
Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire with black cable (5,5 m).

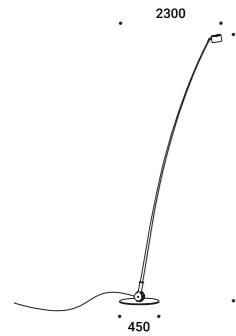

SAMPEI 440 OUTDOOR

8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included
 IP65

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A3770308.27.20
 1A3770308.30.20
 1A3770408.27.20
 1A3770408.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00







Drivers














Driver box	Not included
Input 110-240V - 50/60Hz - Output 700mA - 20W - IP65 - DALI	1A3880008.700



BULBS / LAMPADINE

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	11,2W	360°	2700K	1521lm	90	D	X	1Y0330790
	E27	220-240V	9,5W	25°	3000K	760lm	80	F	X	1Y0330730
	E27	220-240V	20W	200°	2700K	2452lm	80	E	X	1Y2160020
	GU10	230V	7,5W	10°	2700K	390lm	95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	95	G	X	1Y1580010
	GU10	220-240V	5,5W	25°	3000K	375lm	97	G	X	1Y0330500

DRIVER

	Power	Input	Output	Dimming	Protection	Code
	60W(40W)	220-240V(100-127V)	1000mA	DALI	IP20	1Z0241140.1000
	20W	100-240V	12V	1-10V	IP20	1Z0240900
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
	22W(12W)	220-240V(100-127V)	24V	TRIAC/IGBT	IP20	1Z0240410 + 1Z0000034
	18W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240740
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0240860.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH	IP20	1Z0240840.350
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0240860.500

DRIVER



	Power	Input	Output	Dimming	Protection	Code
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
	26,5W(26,5W)	220-240V(100-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0240530.500
	35W(35W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241140.500
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620

COMMON ACCESSORIES

	Size	Cut-out	Finish	Code
Plasterboard trapdoors / Botole in cartongesso				
	200 x 200 mm	205 x 205 mm	Standard	1A3780000.00.00
	400 x 400 mm	415 x 415 mm	Standard	1A3790000.00.00
Clamp / Bloccacavo				
	Ø 50 x 20 mm		Matt White	1A3270300.00.00
			Matt Black	1A3270400.00.00
Driver connector IP68 / Connettore driver IP68				
			Standard	1A1660000.00.00


SUSPENSION FIXING KIT

Recessed fixing kit

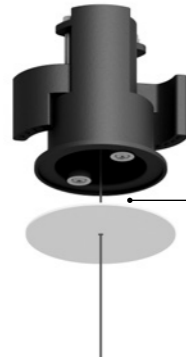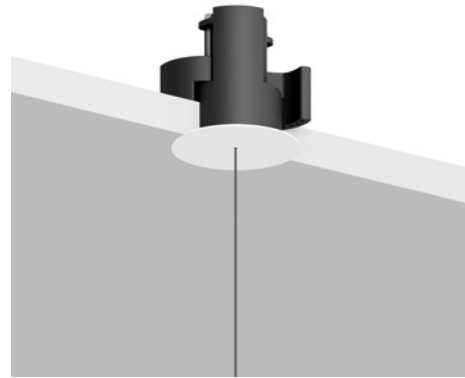

Fixing kit for 0.49" plasterboard


Magnetic fixing

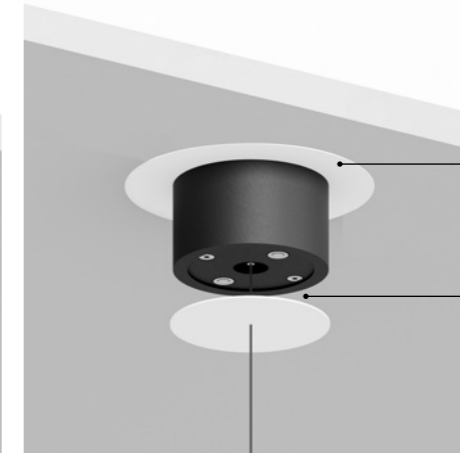

Back plate for masonry ceilings

Magnetic fixing

Model	Use	Product reference	Finish	Code
Recessed fixing kit.01	For suspension cables	SHANGHAI 1	Matt White	1X0000300.01.00
		SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.01.00
Recessed fixing kit.02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
			Matt Black	1X0000400.02.00
Recessed fixing kit.03	For suspension cables	MASAI 1 MASAI 2	Matt White	1X0000300.03.00
			Matt Black	1X0000400.03.00
Recessed fixing kit.04	For electrical cables	ASINTOTO REFLEX S 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0000300.04.00
			Matt Black	1X0000400.04.00
Recessed fixing kit.05	For electrical cables	LOUIS XIV 2 SOTTOSOPRA 2	Matt White	1X0000300.05.00
			Matt Black	1X0000400.05.00





62

SUSPENSION FIXING KIT

Ceiling fixing kit

Model	Use	Product reference	Finish	Code
Ceiling fixing kit.01	For suspension cables	SHANGHAI 1 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0010300.01.00
			Matt Black	1X0010400.01.00
Ceiling fixing kit.02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
			Matt Black	1X0010400.02.00
Ceiling fixing kit.03	For suspension cables	MASAI 1 MASAI 2	Matt White	1X0010300.03.00
			Matt Black	1X0010400.03.00
Ceiling fixing kit.04	For electrical cables	ASINTOTO REFLEX S 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0010300.04.00
			Matt Black	1X0010400.04.00
Back plate	For masonry ceilings		Matt White	1X0050300.01.00



Davide Groppi srl is constantly revising its products in order to offer the best and latest technology available.
This is why its catalogues and technical notes are in constant evolution.
You can find the latest information and technical updates on our website www.davidegroppi.com

davidegroppi.com

Davide Groppi srl
Via Belizzi 20 / 22
29122 Piacenza - Italia
Ph. +39.0523.571590
info@davidegroppi.com

Davide Groppi srl © 2024
Company with sole shareholder under the direction and coordination of IDB spa