

**davide groppi**

HANDBOOK 2024 - US

# INDEX

<b>WIRELESS</b>	13	<b>SUSPENSION</b>	133	<b>CEILING</b>	293	<b>OUTDOOR</b>	449
35MM	15	CARTESIO	135	ASINTOTO	295	BELLADINOTTE	451
BUGIA	19	CATHODE	139	DOT PL 51	301	BUBKA	455
PoPuP	23	FOSBURY	145	MINI PL 51	305	BUBKA BOLLARD	459
POST PRANDIUM	27	LED IS MORE	149	NULLA PL	309	BUIO - TRIMLESS	464
TeTaTeT	33	LOUIS XIV	153	PUNTO PL	313	BUIO - TRIM	468
TeTaTeT Flûte	39	MAGIA	159	PUNTO 2 PL	317	BUIO - SPOT	472
VIS À VIS	43	MISS	171	SANMARTINO	321	GRILLO	481
		MOON	177	TRICK TRACK	325	IMU	485
		NEURO	183			LENTA	489
<b>TABLE</b>	47	OVO	187	<b>RECESSED</b>	329	NEURO OUTDOOR	493
ABA 45	49	OVONELPIATTO	191	BUCO 58	331	NUIT	497
ANIMA	53	REFLEX S	195	DOT R	335	ORIGINE OUTDOOR	501
CALVINO	57	SHANGHAI	199	MIRA R	339	OUT 44	505
FM	61	SIMBIOSI	203	NULLA	343	OUT 58	511
MOON T	65	SOTTILE	207	QUAD	353	OUT 100	515
MORSETTO	71	SOTTOSOPRA	213			SAMPEI 440 OUTDOOR	519
PIGRECO	77					SHOJI OUTDOOR	523
		<b>WALL</b>	217	<b>SYSTEMS</b>	357		
<b>FLOOR</b>	81	DOT P	219	ENDLESS	359	DG111 LED MODULES	527
ABA 120	83	EDISON'S NIGHTMARE	225	FLASH	385	DRIVERS	529
BANNER	87	FILM	229	INFINITO	401	COMMON ACCESSORIES	533
HASHI	91	FOIL	233	OHM	413	SUSPENSION KITS	534
MASAI	95	FOLDER	237	UTOPIA	423	CERTIFICATIONS	537
MOON F	101	MIRA	241				
MOVIE	105	MIRA MAGNETIC	245	<b>TRACKS - PROFILES</b>	429		
ORIGINE	109	MORSETTO P	249	BINARIO TRIFASE	431		
PABLO	115	OZEN	253	FRAMELESS	441		
Q	119	OZEN VETRO	257				
SAMPEI	123	PIÙ	261				
SHOJI	129	RAIL	265				
		REFLEX	269				
		SOL 1	273				
		SOL 2	277				
		SPOT	281				
		TOAST	289				

# INDEX

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY					FINISH		INTERNAL USE ONLY		-	COLOUR TEMPERATURE		-	ELECTRIFICATION	

The Davide Groppi handbook is a confidential document and cannot be disclosed. In this document the drawings and technical information are to be considered indicative. All product features and technical measurements are available on our website [davidegropi.com](http://davidegropi.com)

**Finish**

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox

**Colour temperature**

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

**Electrification**



0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

General data on the product

Mounting - Lighting - Use - Material - Finish - Note

Model specifications














Technical data - Certifications - Codes

NULLA		Davide Groppi / 2010	
Recessed / Direct / Indoor			
Material	Metal		
Finish	00 Standard		
Note	Recessed luminaire. Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.		
<hr/>			
	<b>NULLA - 23°</b> 14W 24V DC 2700K - 425lm / 3000K - 458lm CRi >90 Beam 23° UGR <19 Driver not included CE <img alt="IP20/IP65 logo" data-bbox="835 300 845 310"/>	Standard - 2700K Standard - 3000K	1A410000.27.20   1A410000.30.20
	<b>NULLA - 32°</b> 14W 24V DC 2700K - 538lm / 3000K - 579lm CRi >90 Beam 32° UGR <19 Driver not included CE <img alt="IP20/IP65 logo" data-bbox="835 395 845 405"/>	Standard - 2700K Standard - 3000K	1A210000.27.20   1A210000.30.20
398			

Compulsory and optional accessories

Accessories finishes and specifications - Codes

Reference model

NULLA		Davide Groppi / 2010	
<b>Compulsory accessories / Accessori obbligatori</b>			
Installation kits / Kit d'installazione			
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A2170400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A3980400.00.00
	Plasterboard flange (bottom) 12,5 mm / Flangia (da sotto) per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A4960400.00.00
<hr/>			
Drivers / Alimentatori			
	Driver / Alimentatore 220-240V(100-127V) 24V/16W(15W)IP20(DALI)		Not included
	Driver / Alimentatore 220-240V(100-127V) 24V/20W(15W)IP20(PUSH)		Not included
	Driver / Alimentatore 220-240V 24V/20W/IP20/TRIAC/IGBT		Not included
12024180.24			
12024870.24			
12024850.24			
400			



**Class II appliance:** appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



**Class III appliance:** appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and water.



Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the appliance to the closest lighting object.



**Color Rendering Index:** the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.



The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR\* <19).

All Davide Groppi products, except those specifically indicated,  
are equipped with electronic light sources (LED).  
The selection of diodes is carried out with the utmost care to guarantee  
the highest levels of performance and luminous uniformity.

**WIRELESS**

## 35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Those dear old slides. Nobody pays any attention to them anymore.  
It's the smallest lamp in our collection.  
It's an idea, a thought, a pendant, something you can wear.  
The pulsating light and the images you choose to display on it  
make 35MM unique and exceptional.






# 35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

**Material** Metal - Polycarbonate  
**Finish** .00 Standard


**Note** Battery-operated wearable luminaire. Matt white front. Glossy black back. Customised image not included. Intermittent light.



**35MM**  
0,3W  
ON/OFF  
Batteries 2xCR2032 included

Standard - ON/OFF

|1A2640000.00.00 |

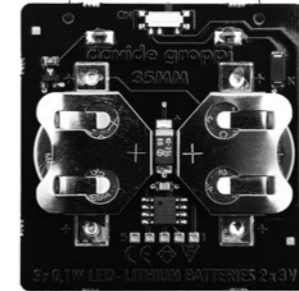

## BUGIA

Daide Groppi / 2018



A lightweight and soft light.  
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.


# BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

**Material** Metal - Methacrylate  
**Finish** .18 Matt Gold

**Note** Chargeable table luminaire. Matt white diffuser. Gold finish base. Battery life: 9 hours.



## BUGIA


2W  
3000K - 120lm  
CRI >90  
ON/OFF  
Driver with plug not included  
USB cable included

Matt Gold - 3000K - ON/OFF

1A2351803.30.00

## Optional accessories

Drivers



### Driver with plug

Not included

Matt Black      Input 110-240V - 50/60Hz  
Output 5V DC - 2A - 10W - IP20

1Z0000088

Other accessories



### USB to USB-C cable

Included

Matt Black      Length 39.37"

1Z0000132



## PoPuP

Davide Groppi / 2016



Light\*Music\*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.


# PoPuP

Davide Groppi / 2016

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Chargeable table luminaire and speaker. Magnetic fixing stem. Battery life: 12 hours light only and 30 hours audio only at medium volume.

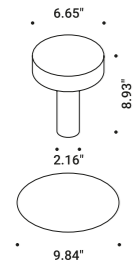

**PoPuP**


2W  
 3000K - 183lm  
 CRI >80  
 ON/OFF  
 5W Audio - 50-20000Hz  
 Driver with plug included

Matt White - 3000K - ON/OFF

| 1A2610303.30.00 |

**Optional accessories**

Drivers




**Driver with plug**

Included

Matt Black      Input 110-240V - 50/60Hz  
 Output 10000mAh - 4,2-14V DC  
 18W - IP20

1Z1530030

Other accessories



**Rechargeable battery**

Included

Matt White      12V DC - NiMH 3700mAh

1A2620300.00.00



## POST PRANDIUM

Daide Groppi / 2023



During a meal with friends, a ladle is reused to scoop up the light  
and serve it onto the table.

A project from many years ago, today in a new wireless version.

**Archiproducts Design Award 2023**


# POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .01 Polished Chrome

**Note** Chargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.



**POST PRANDIUM**


2W  
 3000K - 171lm  
 CRI >90  
 ON/OFF  
 Driver with plug not included  
 USB cable included

Polished Chrome - 3000K - ON/OFF

| 1A4550103.30.00 |

**Optional accessories**

Drivers



<b>Driver with plug</b>		<b>Not included</b>
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



<b>USB to USB-C cable</b>		<b>Included</b>
Matt Black	Length 39.37"	1Z0000132






POST PRANDIUM





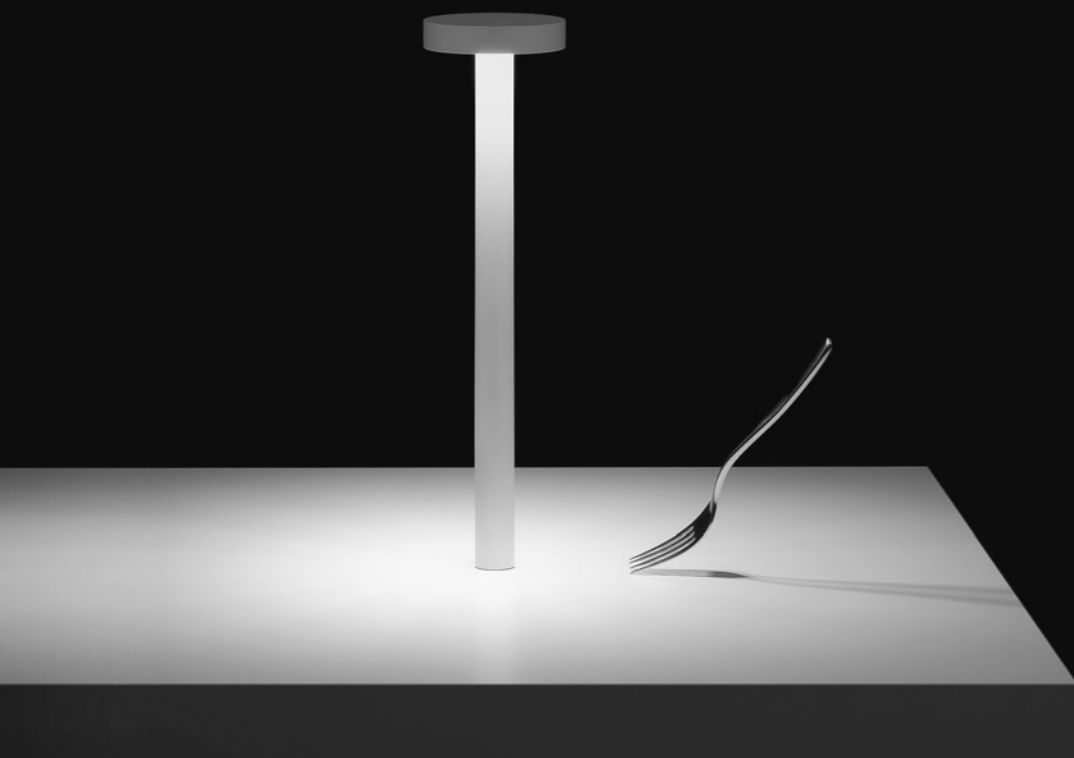


A timeless icon with an eye on the future.  
Portable and rechargeable, the greatest expression of freedom.  
With TeTaTeT, every table becomes a meeting place, a complete dining experience.  
Its light caresses those it illuminates with pure emotion.  
Equipped with Touch technology and a magnetic fixing base.  
**Mention of Honour XXIV Compasso d'Oro ADI Award, 2016**



Table / Direct / Wireless

<b>Material</b>	ABS - Metal - Methacrylate		
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.18</b> Matt Gold

**Note** Chargeable table luminaire. Magnetic fixing stem. Touch ON/OFF.  
Battery life: 12 hours.

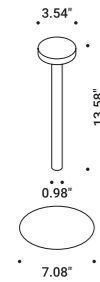


**TeTaTeT**

2W  
2700K - 165lm / 3000K - 178lm  
CRI >90  
ON/OFF  
Driver with plug included

Matt White - 2700K - ON/OFF	1A0310303.27.00
Matt White - 3000K - ON/OFF	1A0310303.30.00
Matt Black - 2700K - ON/OFF	1A0310403.27.00
Matt Black - 3000K - ON/OFF	1A0310403.30.00
Matt Gold - 2700K - ON/OFF	1A0311803.27.00
Matt Gold - 3000K - ON/OFF	1A0311803.30.00


**Optional accessories**

Drivers



<b>Driver with plug</b>		<b>Included</b>
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073


Other accessories



<b>Rechargeable battery</b>		<b>Included</b>
Matt White	4,8V DC - NiMH 4300mAh	1A0430300.00.00
Matt Black	4,8V DC - NiMH 4300mAh	1A0430400.00.00
Matt Gold	4,8V DC - NiMH 4300mAh	1A0431800.00.00

**Optional accessories**

Other accessories

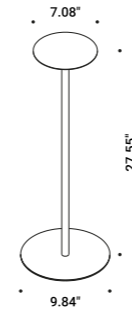

<b>Table</b>	<b>Not included</b>
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00



## TeTaTeT Flûte

Davide Groppi / 2017



This is an evolution of our TeTaTeT lamp.  
The lamp head is lightweight and appears to be floating in air.  
The transparent stem brings to mind the glasses used in the classic "mise en place".  
Magnetic fixing base.


# TeTaTeT Flûte

Davide Groppi / 2017

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Chargeable table luminaire. Magnetic fixing transparent stem.  
 Magnetic LED module. Battery life: 9 hours.



## TeTaTeT Flûte


2W  
 2700K - 167lm / 3000K - 180lm  
 CRI >90  
 ON/OFF  
 Driver with plug not included  
 USB cable included

Matt White - 2700K - ON/OFF  
 Matt White - 3000K - ON/OFF

1A2360303.27.00  
 1A2360303.30.00

## Optional accessories

Drivers




### Driver with plug

Matt Black Input 110-240V - 50/60Hz  
 Output 5V DC - 2A - 10W - IP20

1Z0000088

Not included

LED modules



### LED module

Matt White 2W - 2700K - 167lm - CRI >90  
 Rechargeable lithium battery 5V DC Li-Ion  
 4800mAh - Battery life 9 hours  
 2W - 3000K - 180lm - CRI >90  
 Rechargeable lithium battery 5V DC Li-Ion  
 4800mAh - Battery life 9 hours

1A5360303.27.00

1A5360303.30.00

Included

Davide Groppi / 2017

# TeTaTeT Flûte

## Optional accessories

Other accessories



### USB to USB-C cable

Matt Black Length 39.37" 1Z0000132

Included



### Table

Matt White 1A4020300.00.00  
 Matt Black 1A4020400.00.00

Not included

## VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.  
Once again, we decided to take away, seeking only the light.  
Transparency is the main feature of this battery-powered lamp.  
**Archiproducts Design Award 2023**


# VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .00 Standard

**Note** Chargeable table luminaire. Transparent disc with refractive effect.  
 Magnetic fixing LED module and transparent stem. Battery life: 9 hours.



## VIS À VIS


2W  
 2700K - 110lm / 3000K - 113lm  
 CRI >90  
 ON/OFF  
 Driver with plug not included  
 USB cable included

Standard - 2700K - ON/OFF  
 Standard - 3000K - ON/OFF

1A4530003.27.00  
 1A4530003.30.00

## Optional accessories

### Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

### LED modules



LED module		Included
Matt White	5W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370003.27.00
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370003.30.00

### Other accessories



USB to USB-C cable		Included
Matt Black	Length 39.37"	1Z0000132

# VIS À VIS



**TABLE**



**ABA 45**

Omar Carraglia / 2007



Inspired by the shape of a traditional lampshade.  
The bulb is not shielded but displayed, and it peeks out from the shade.  
Floor version available.


## ABA 45

Omar Carraglia / 2007

Table / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Table luminaire. Dimmer on the cable. White cable.



**ABA 45**  
Max 10W - E26  
120V - 60Hz  
Dimmer on board  
Bulb not included

Matt White - Dimmer on board

| 1A2700303.00.06 |





## ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.

At the top, an open circle, almost a hook for fishermen of the soul.

**Selection for ADI Design Index 2022**

**AZ Award 2022**

**Archiproducts Design Award 2021**


# ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

**Material** ABS - Carbon fiber - Metal  
**Finish** .04 Matt Black

**Note** Table luminaire. Touch ON/OFF and adjustment. Black cable.



## ANIMA

4W  
 5V DC  
 2700K - 575lm / 3000K - 589lm  
 CRI >80  
 Dimmer on board  
 Driver with plug not included  
 USB cable included




Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A1090403.27.06  
 1A1090403.30.06

## Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 39.37"	1Z0000132





Full and empty, shadow and light.  
A circular mirror to be positioned as you please,  
to both light and capture the surrounding space.  
**Born Series Award 2019**


# CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor

**Material** Brass - Metal - Methacrylate - Mirror  
**Finish** .00 Standard

**Note** Table luminaire. Disc with mirror finish adjustable in all directions. Matt blue rear disc. Matt black base. Brass stem. Dimmer on the cable. Black cable.



## CALVINO


18W  
 24V DC  
 2700K - 1275lm / 3000K - 1372lm  
 CRI >90  
 Dimmer on board  
 Driver with plug included

Standard - 2700K - Dimmer on board  
 Standard - 3000K - Dimmer on board

1A2710003.27.06  
 1A2710003.30.06

## Optional accessories


Drivers




### Driver with plug

Not included

Matt Black      Input 110-240V - 50/60Hz  
 Output 24V DC - 18W - IP20      1Z0431020

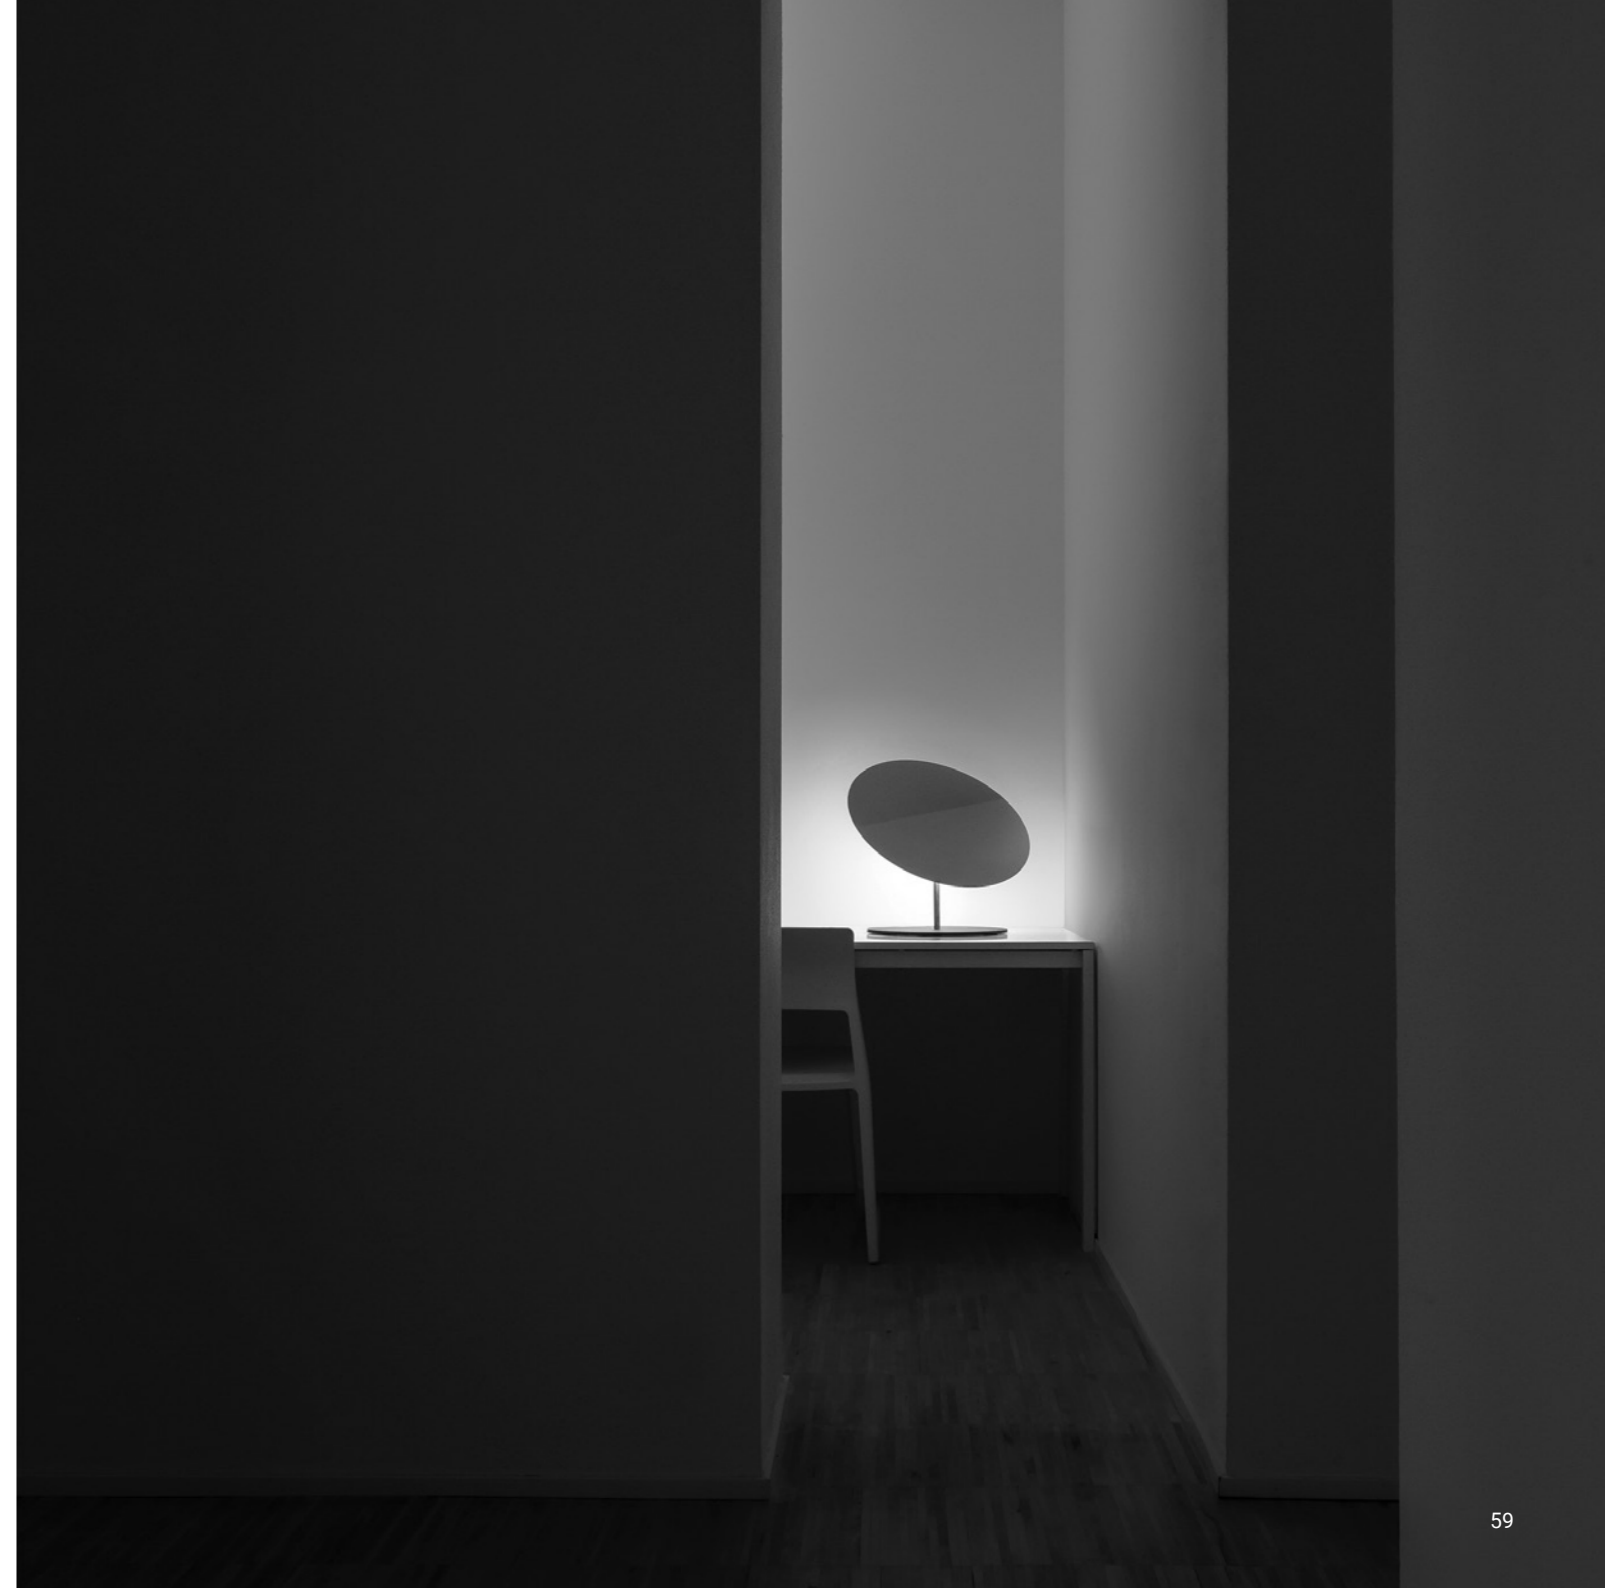

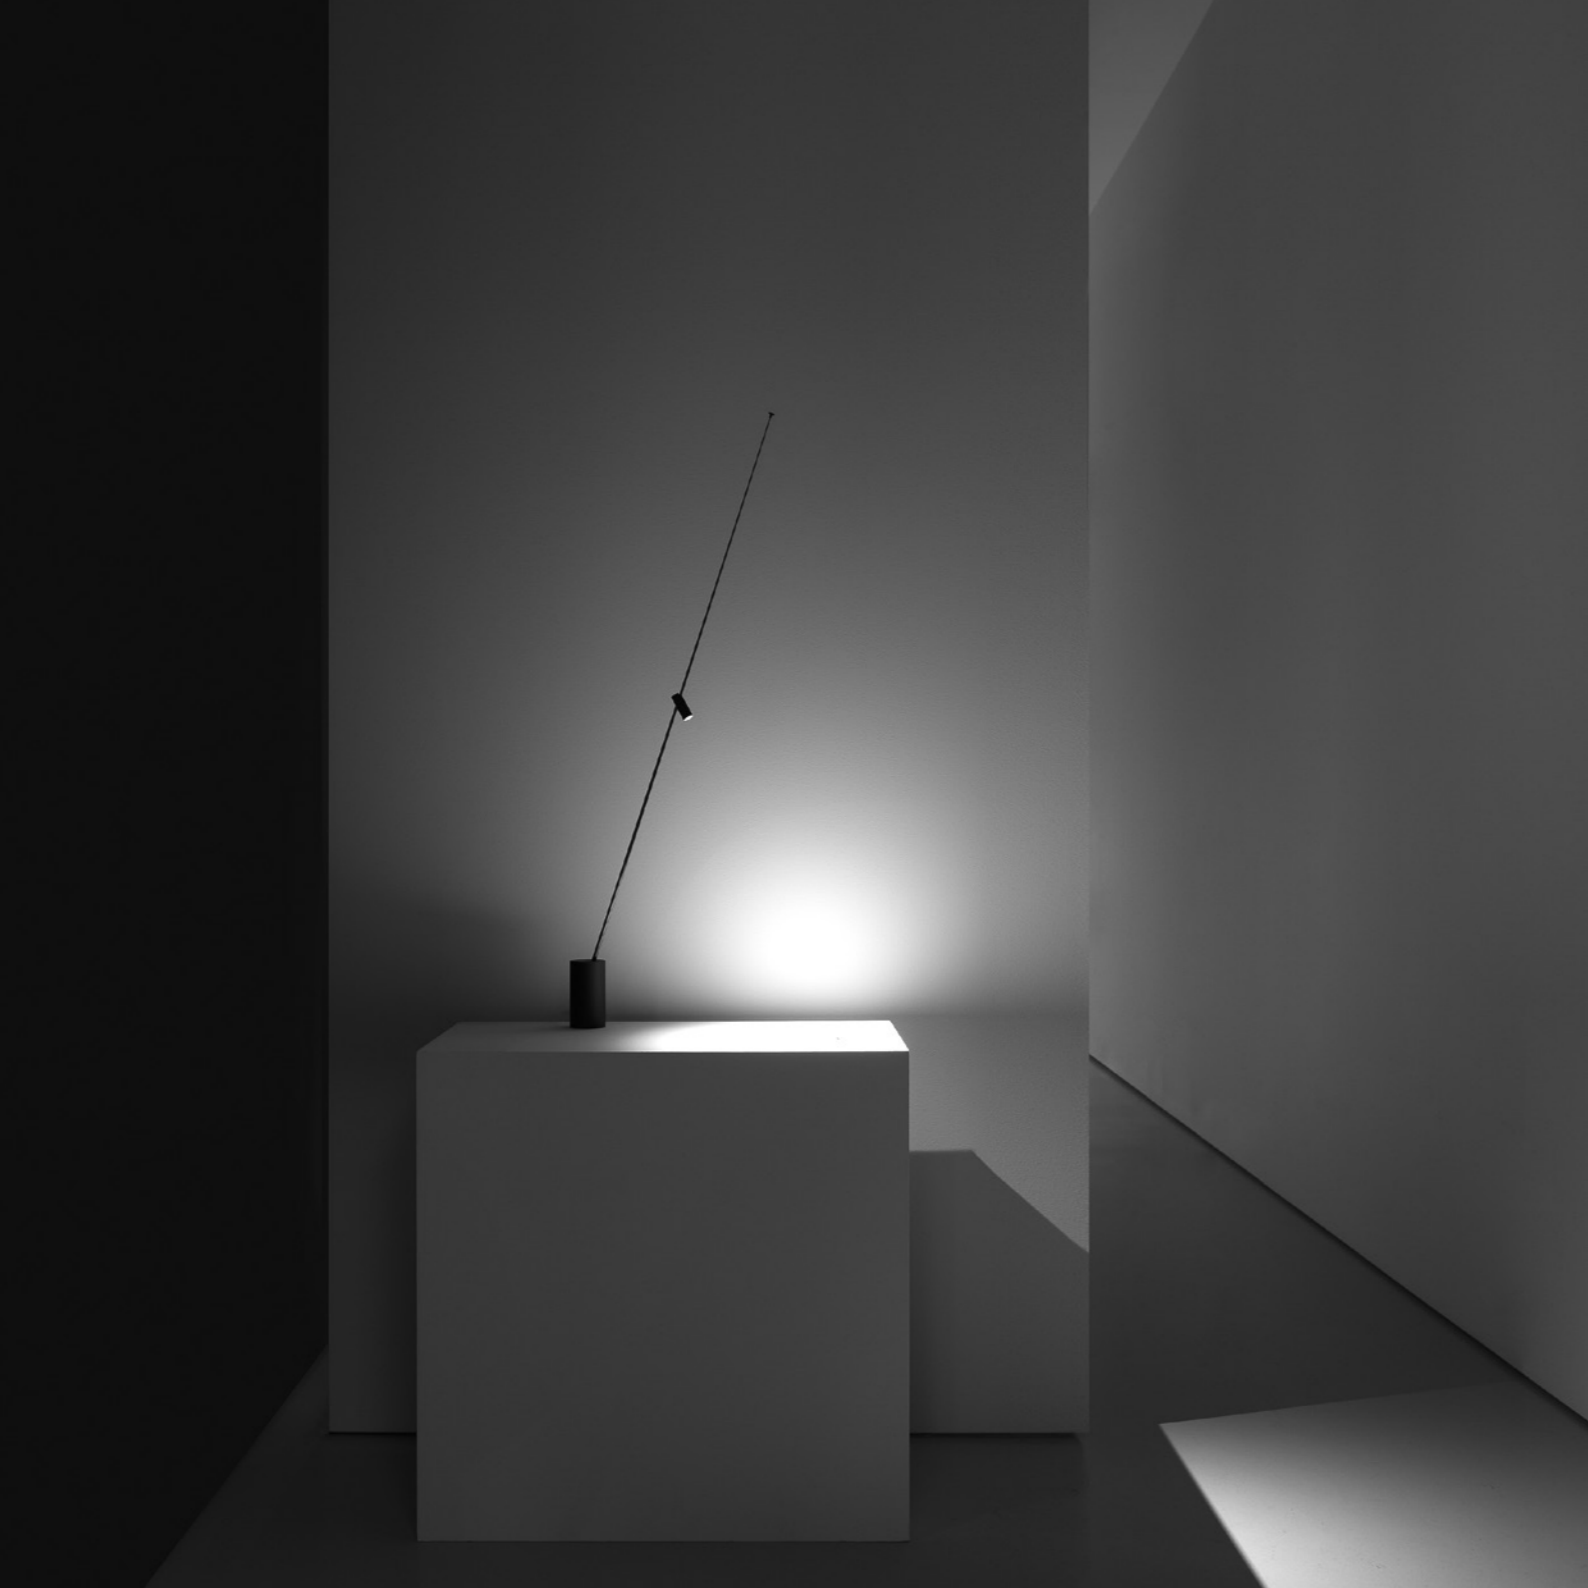

An antenna of light.  
Antennas are mysterious, absolute and intrinsically beautiful,  
because their essentialness expresses nothing more than their function.  
A performing, adjustable and extremely comfortable light.  
**Selection for ADI Design Index 2023**  
**Archiproducts Design Award 2022**


# FM

Davide Groppi / 2022

Table / Direct / Indoor

**Material** Carbon fiber - Metal  
**Finish** .04 Matt Black

**Note** Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable.

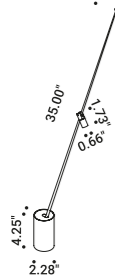

## FM

1,5W  
 5V DC  
 2700K - 154lm / 3000K - 179lm  
 CRI >90  
 UGR <19  
 Dimmer on board  
 Driver with plug not included  
 USB cable included




Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2440403.27.06  
 1A2440403.30.06

## Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 39.37"	1Z0000132





## MOON T

Daide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and floor versions also available.


# MOON T

Davide Groppi / 2019

Table / Diffuse / Indoor

**Material** Japanese paper - Metal - PE  
**Finish** .00 Standard

**Note** Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping.



## MOON T

Max 18W - E26  
120V - 60Hz  
Dimmer on board  
Bulb not included  
Moisture barrier bag included



Standard - Dimmer on board

| 1A2690003.00.06 |

## Optional accessories

Other accessories

Moisture barrier bag	Not included
Packaging for air and sea shipping	4A2690010





## MORSETTO

Daide Groppi / 2017



A lamp that can be positioned, balanced and turned,  
but overall it produces a beautiful light on the table.  
The oversized workshop-style clamp allows the light source to be positioned far from  
where the lamp is attached to the table, using three adjustable arms.  
A table lamp, but at the same time a suspended light.  
Wall version also available.


# MORSETTO

Davide Groppi / 2017

Table / Direct / Indoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Table luminaire. Adjustable in all directions. Shiny red clamp. Dimmer on the cable. Black cable.

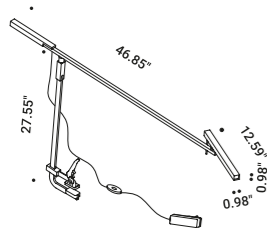

## MORSETTO

13W  
 24V DC  
 2700K - 765lm / 3000K - 823lm  
 CRI >90  
 UGR <19  
 Dimmer on board  
 Driver with plug included




Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2520403.27.06  
 1A2520403.30.06

## Optional accessories

Drivers



### Driver with plug

Matt Black Input 110-240V - 50/60Hz  
 Output 24V DC - 18W - IP20

1Z0431020

Included








A rigorous project in its design.  
A dialogue between two essential, concrete and tangible materials: wood and glass.  
Part frosted and part transparent, it moves feely on the base,  
functioning both as diffuser and convex lens.

Table / Diffuse / Indoor

**Material** Glass - Oak wood  
**Finish** .00 Standard

**Note** Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable.  
 Black cable.




**PIGRECO**  
 6,5W  
 24V DC  
 3000K - 450lm  
 CRI >90  
 Dimmer on board  
 Driver with plug included

Standard - 3000K - Dimmer on board

| 1A2600003.30.06 |

**Optional accessories**

Drivers




**Driver with plug**

Included

Matt Black

Input 110-240V - 50/60Hz  
 Output 24V DC - 18W - IP20

1Z0431020

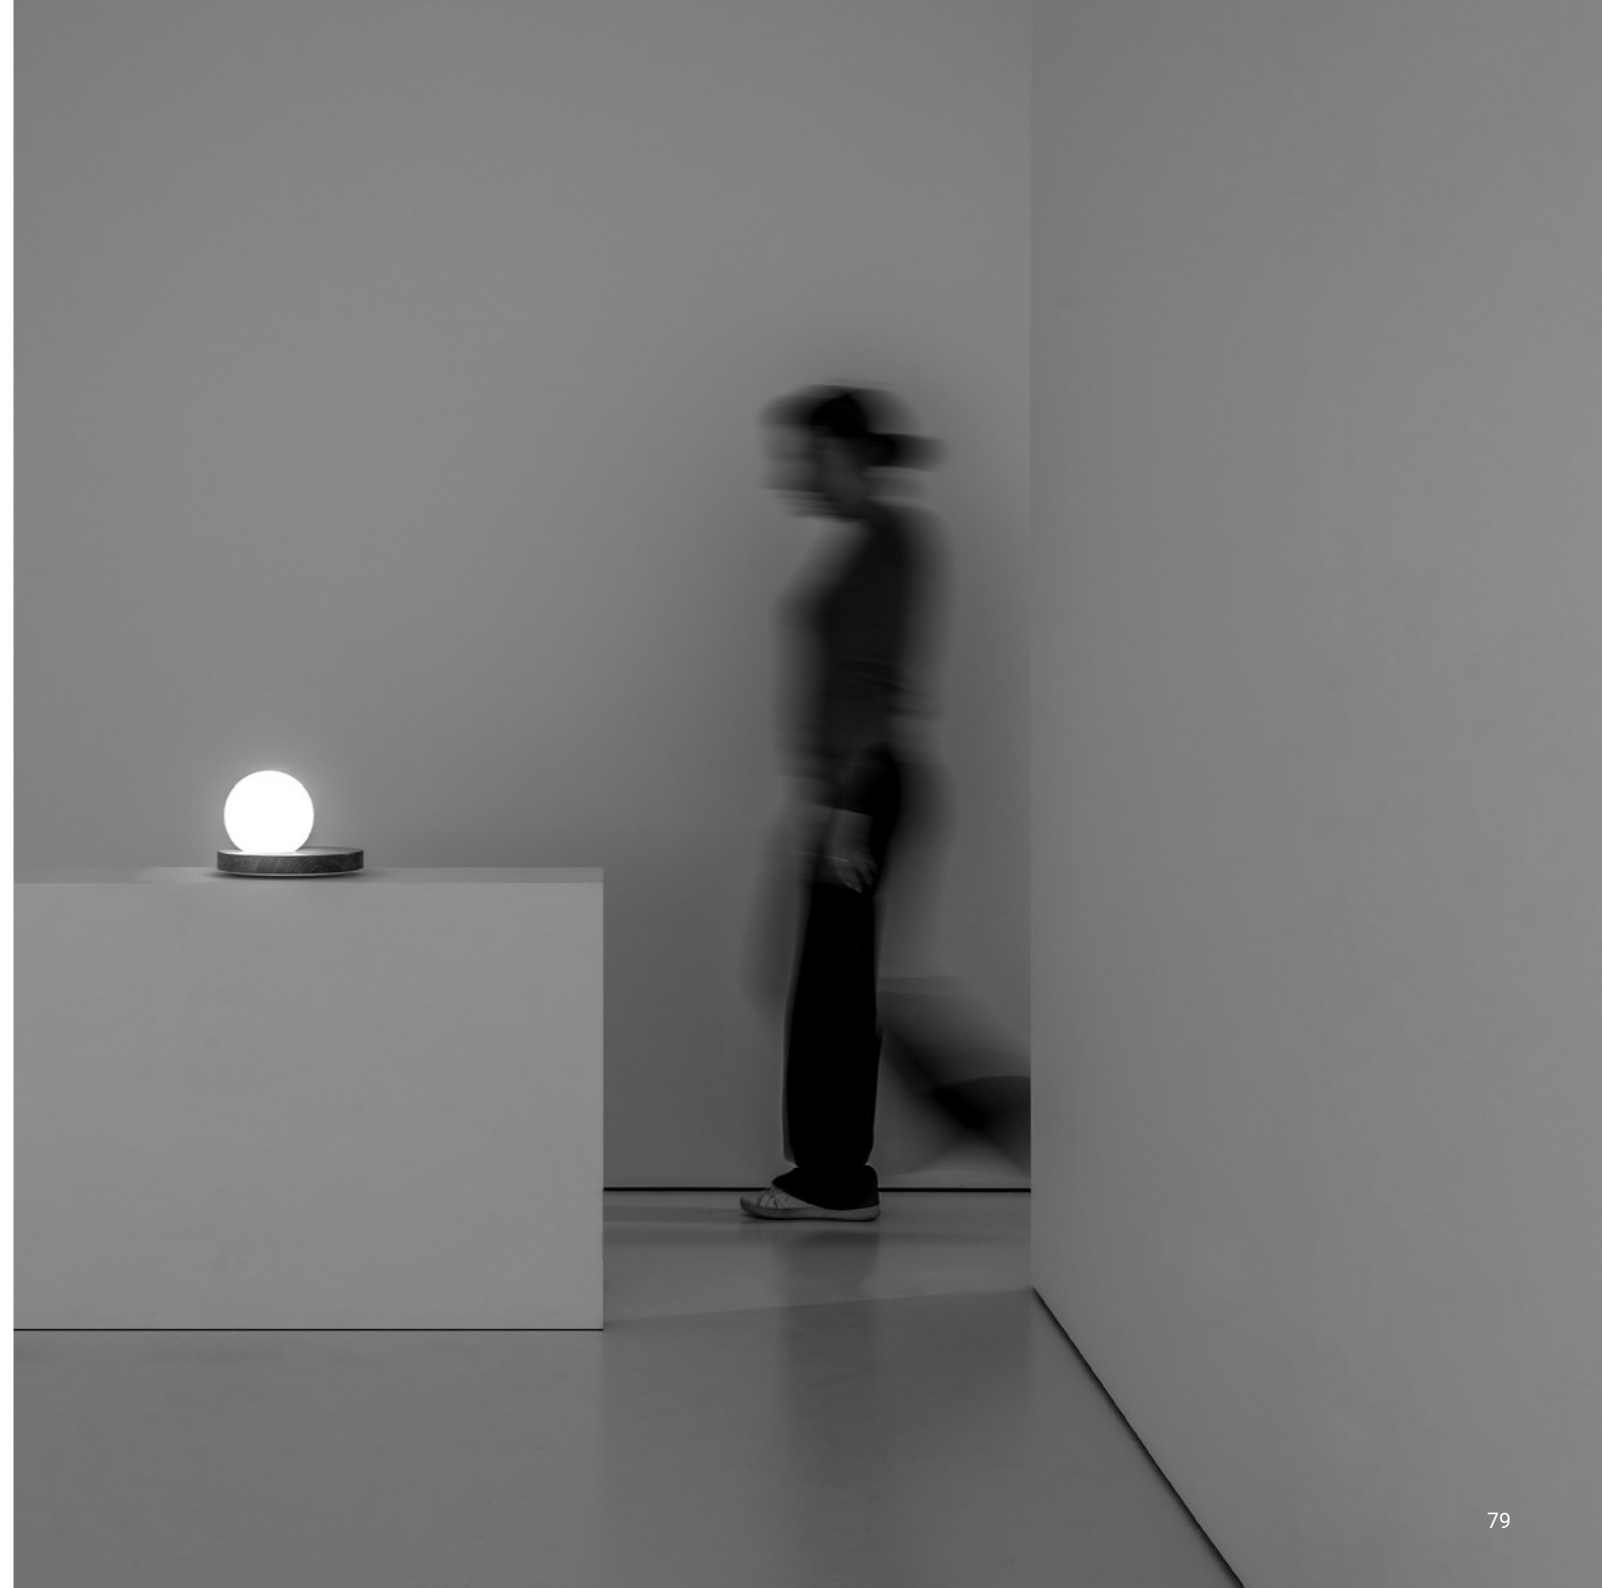



**FLOOR**



## ABA 120

Omar Carraglia / 2007

Inspired by the shape of a traditional lampshade.  
The bulb is not shielded but displayed, and it peeks out from the shade.  
Table version available.


# ABA 120

Omar Carraglia / 2007

Floor / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White


**Note** Floor luminaire. Dimmer on the cable. White cable.



**ABA 120**  
Max 10W - E26  
120V - 60Hz  
Dimmer on board  
Bulb not included

Matt White - Dimmer on board

| 1A2770303.00.06 |

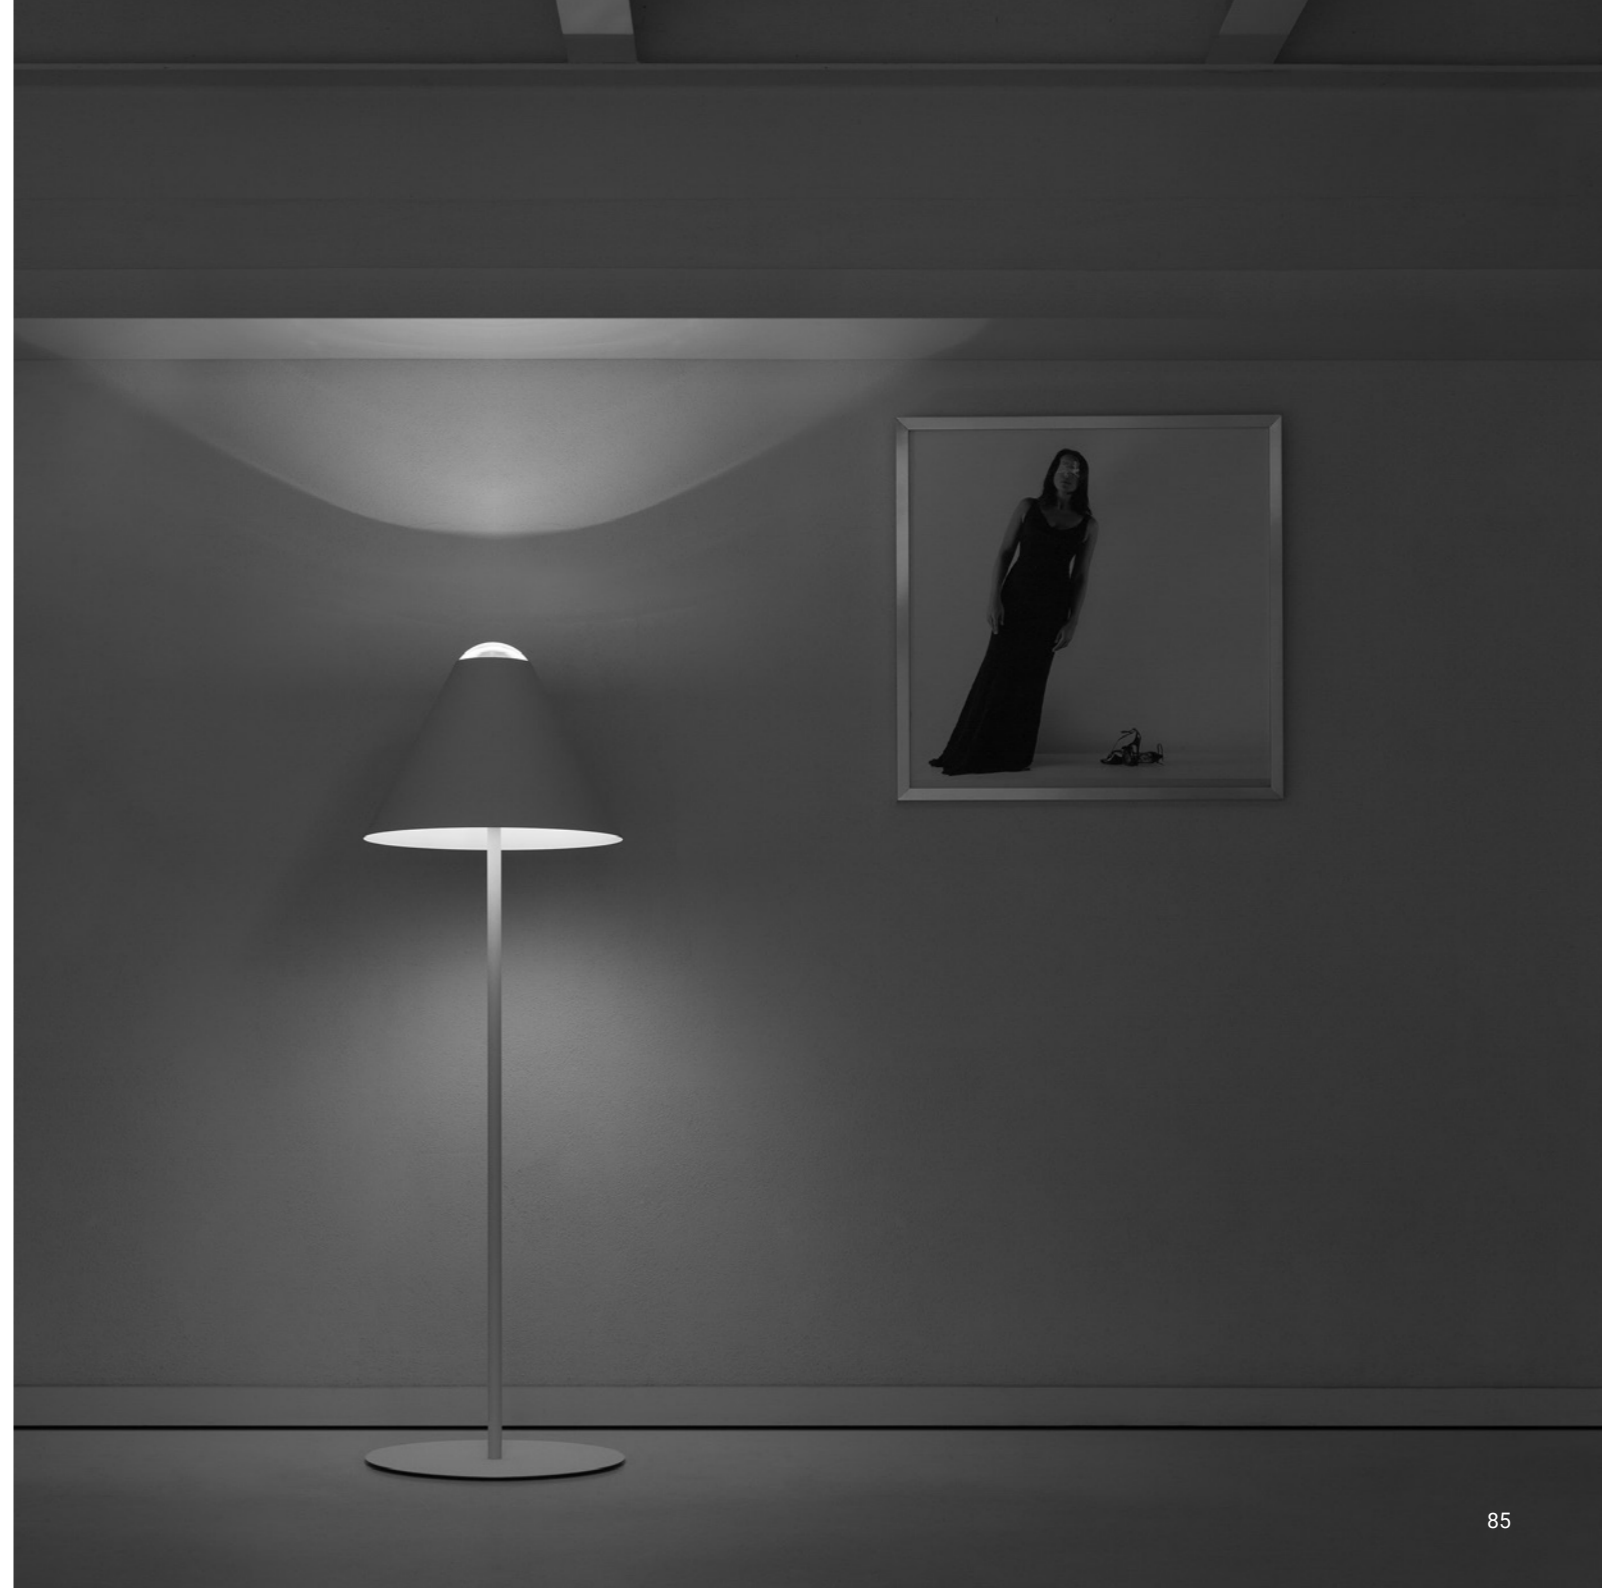

## BANNER

Mauro Ferrari / 2004



A solution that is part fixed and part mobile.  
The lamp is fixed to the wall, but is powered by a cable and normal electrical plug.  
Banner is one of our many solutions for bringing light  
where you need it, with the greatest freedom.


# BANNER

Mauro Ferrari / 2004

Floor / Indirect / Indoor

Material Metal - Polycarbonate  
Finish .03 Matt White

Note Floor lamp with wall fixing. Connection cable not included.




## BANNER

95W  
120V - 60Hz  
2700K - 11083lm / 3000K - 11918lm  
CRI >80  
Driver integrated  
DALI

Matt White - 2700K - DALI  
Matt White - 3000K - DALI

1A1840303.27.01  
1A1840303.30.01



## BANNER

95W  
120V - 60Hz  
2700K - 11083lm / 3000K - 11918lm  
CRI >80  
Driver integrated  
Dimmer on board

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board

1A1840303.27.06  
1A1840303.30.06



## HASHI

Federico Delrosso / 2017



A floor lamp conceived to provide direct light in a simple and flexible manner. Its principle component is the pivot point between two "chopsticks" (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space. Particular care has been given to the proportions. The sticks always appear lightweight and balanced.

# HASHI


Federico Delrosso / 2017

Floor / Direct / Indoor

Material Metal - Methacrylate

Finish .04 Matt Black .18 Matt Gold

Note Floor luminaire. Adjustable along the vertical axis. Dimmer on the cable.  
Black cable.



## HASHI

15,5W

120V - 60Hz

2700K - 765lm / 3000K - 823lm

CRI >90

UGR <19

Driver integrated

Dimmer on board



Matt Black - 2700K - Dimmer on board

Matt Black - 3000K - Dimmer on board

Matt Gold - 2700K - Dimmer on board

Matt Gold - 3000K - Dimmer on board

1A2510403.27.06

1A2510403.30.06

1A2511803.27.06

1A2511803.30.06






A tribute to Alberto Giacometti and to his thin fellows...  
A lamp for lighting pictures, powered by an ordinary electrical socket.  
The lamp has an adjustable light and it can be oriented.  
The lamp section is reduced to a minimum.



Floor-Suspension / Indirect / Indoor

**Material** Brass - Methacrylate  
**Finish** **.03** Matt White **.04** Matt Black **.08** Brushed Brass

**Note** Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.

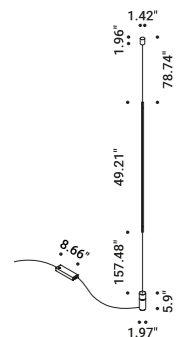


**MASAI 1**

Driver with plug version  
 15,5W  
 120V - 60Hz  
 2700K - 600lm / 3000K - 619lm  
 CRI >90  
 Driver integrated  
 Dimmer on board



Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board  
 Brushed Brass - 2700K - Dimmer on board  
 Brushed Brass - 3000K - Dimmer on board

1A2720303.27.06  
 1A2720303.30.06  
 1A2720403.27.06  
 1A2720403.30.06  
 1A2720803.27.06  
 1A2720803.30.06



**MASAI 2**


Remote driver version  
 13W  
 120V - 60Hz  
 2700K - 600lm / 3000K - 619lm  
 CRI >90  
 Driver not included

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K


1A2720303.27.20  
 1A2720303.30.20  
 1A2720403.27.20  
 1A2720403.30.20  
 1A2720803.27.20  
 1A2720803.30.20

**Compulsory accessories**


**Drivers**



<b>Driver</b>				Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	MASAI 2	1Z0240410	



<b>Driver</b>				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	MASAI 2	1Z2020040	



<b>Controller</b>				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	MASAI 2	1Z2170020	

**Optional accessories**

**Suspension kits**




<b>Sloped ceiling suspension kit</b>				Not included
	Nickel plated - 1 Piece		1A0510000.00.00	



<b>Recessed suspension kit for 0.49" plasterboard</b>				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000400.03.00	



<b>Ceiling suspension kit</b>				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.03.00	



<b>Wall adapter plate</b>				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	



<b>304 Stainless steel suspension cable</b>				Not included
	Lenght 393.70"		1A1680000.00.00	





## MOON F

Daide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and floor versions also available.


# MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

**Material** Japanese paper - PE  
**Finish** .00 Standard

**Note** Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model.




## MOON 80 F

Max 25W - E26  
 120V - 60Hz  
 Dimmer on board  
 Bulb not included  
 Moisture barrier bag included

Standard - Dimmer on board

| 1A4880003.00.06 |



## MOON 120 F

Max 2x25W - E26  
 120V - 60Hz  
 Dimmer on board  
 Bulb not included  
 Moisture barrier bag included  
 Wooden crate included

Standard - Dimmer on board

| 1A4890003.00.06 |

Davide Groppi / 2023

# MOON F

## Optional accessories

### Other accessories


<b>Moisture barrier bag</b>				Not included
	Packaging for air and sea shipping	MOON 80 F	4A2840010	

<b>Moisture barrier bag</b>				Included
	Packaging for air and sea shipping	MOON 120 F	49860020	

<b>Wooden crate</b>				Included
	Packaging for air and sea shipping	MOON 120 F	49860010	

## MOVIE

Omar Carraglia / 2005

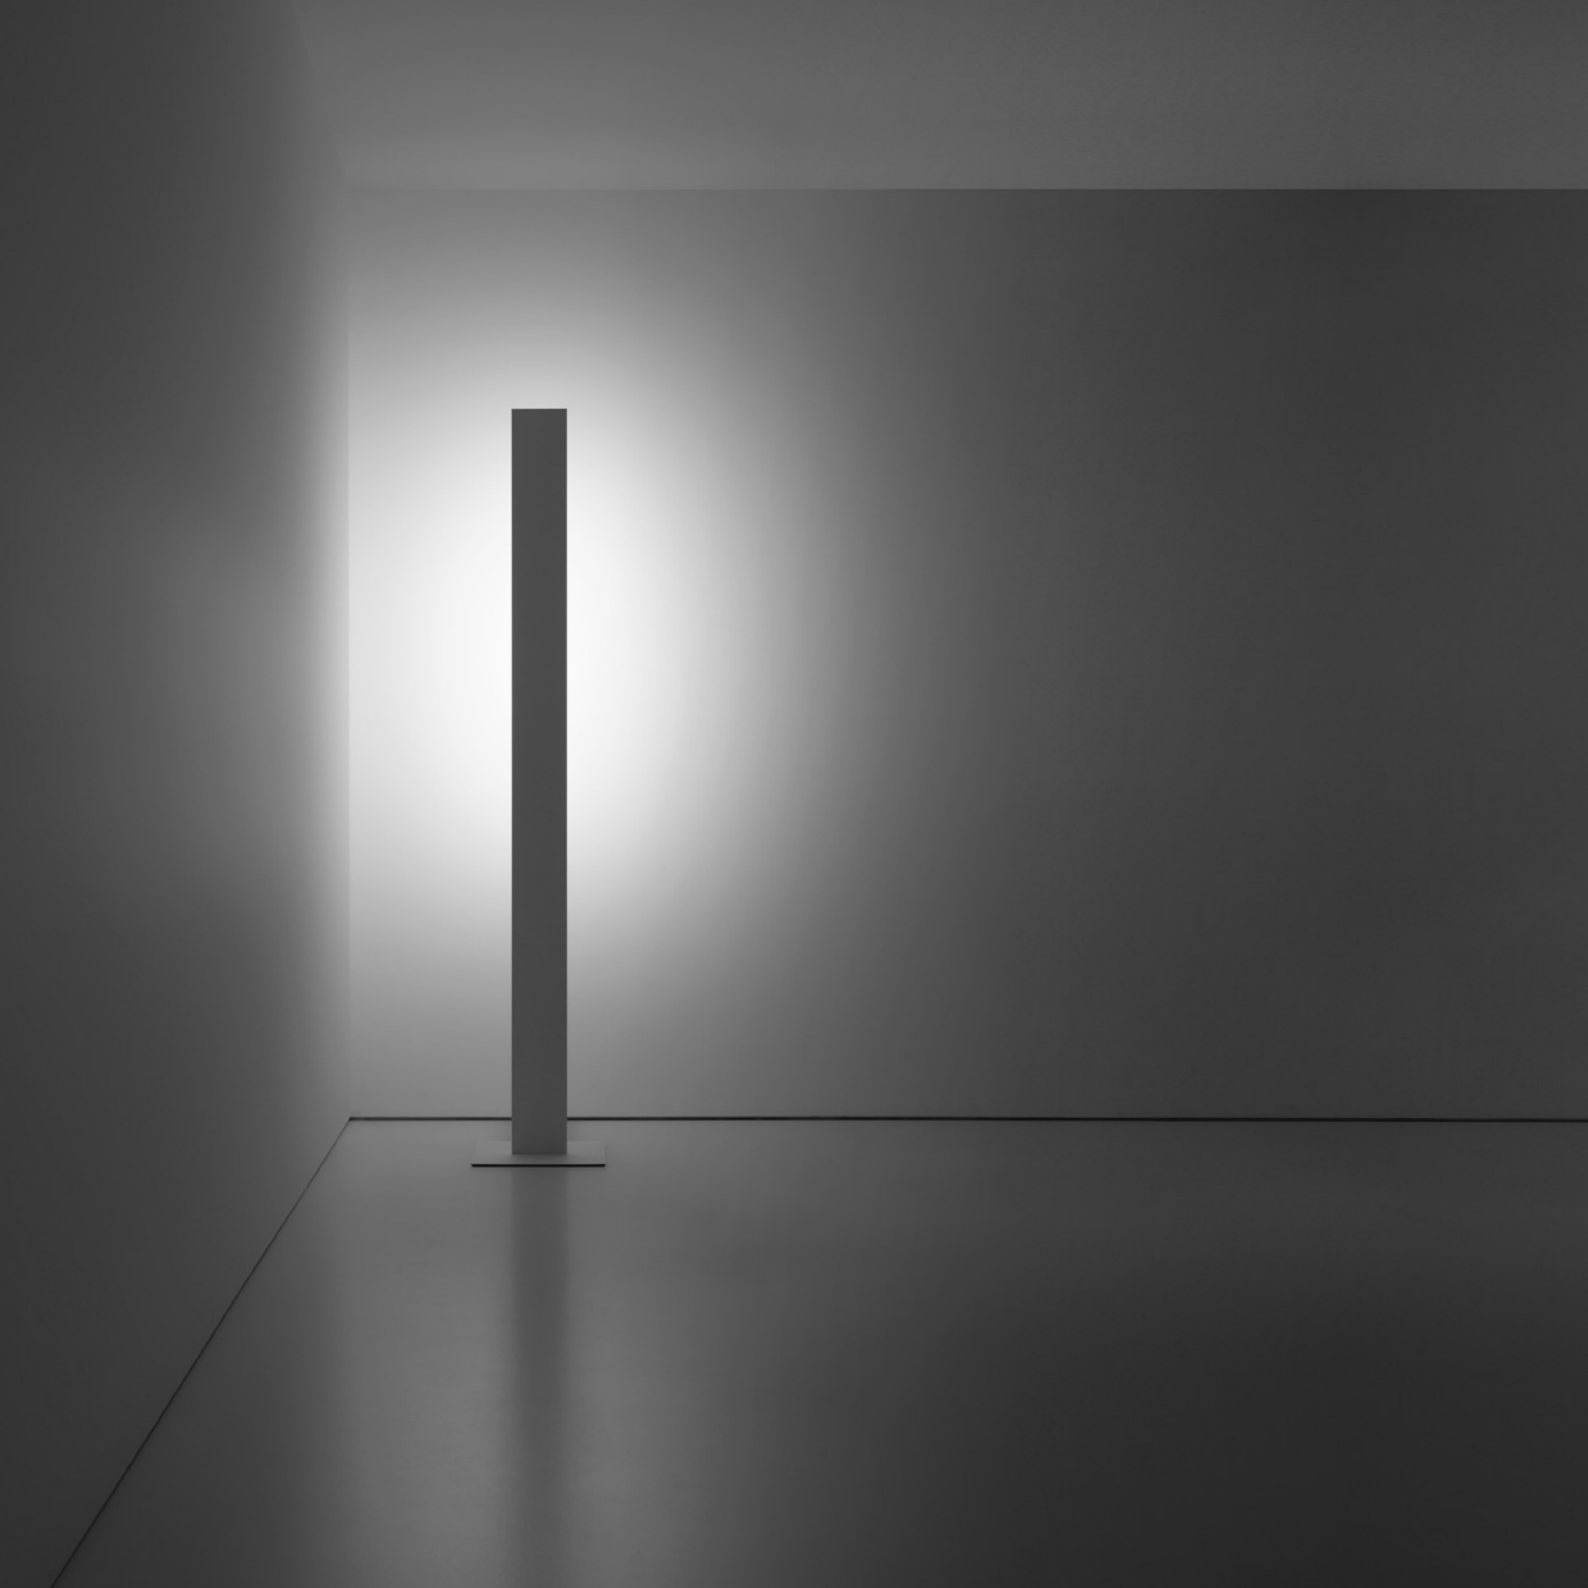

To "play" with the light.  
A RGBW system lets you create all the light of the world.  
To feel the light and to live it in all its spectrum.

# MOVIE


Omar Carraglia / 2005

Floor / Indirect / Indoor

Material Metal - Polycarbonate

Finish .03 Matt White .13 Black Brushed Stainless Steel

Note Floor luminaire. RGBW wireless control. Black cable.

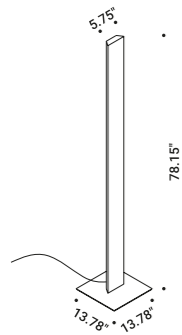

## MOVIE

80W

120V - 60Hz

2832lm

CRI >90

Driver integrated

Dimmer on board

RGBW wireless control

Matt White - RGBW - Dimmer on board

1A2740303.98.06

Black Brushed Stainless Steel - RGBW - Dimmer on board

1A2741303.98.06



## ORIGINE

Davide Groppi - Giorgio Rava / 2020



From the Latin "origo", start, birth, source.  
It appears like a bud emerging from the ground and soaring upwards towards the sky,  
a stem that becomes increasingly thinner.

Mysterious and enigmatic, it combines the fascination of the unknown  
with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light,  
which is intentionally non-invasive, graphic and fascinating.

Available in 3 different heights and in an outdoor version.

**AZ Award 2021** and **People's Choice**  
**Archiproducts Design Award 2020**

Floor / Indirect / Indoor

**Material** Glass fiber - Metal  
**Finish** .04 Matt Black

**Note** Floor luminaire. Dimmer on the cable. Black cable.




**ORIGINE 290**

25W  
 24V DC  
 2700K - 1926lm / 3000K - 2075lm  
 CRI >80  
 Driver included  
 Dimmer on board



Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2300403.27.06  
 1A2300403.30.06

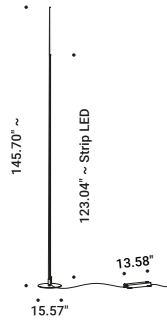


**ORIGINE 390**

30W  
 24V DC  
 2700K - 2843lm / 3000K - 3063lm  
 CRI >80  
 Driver included  
 Dimmer on board



Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2310403.27.06  
 1A2310403.30.06



**ORIGINE 490**

35W  
 24V DC  
 2700K - 3760lm / 3000K - 4051lm  
 CRI >80  
 Driver included  
 Dimmer on board



Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2320403.27.06  
 1A2320403.30.06







The light is elevated to a work of art and contemplation.  
A luminous panel without a frame leans against the wall as if waiting to be hung.  
The colour and brightness can be controlled from the remote control.


# PABLO

Davide Groppi / 2015

Floor / Diffuse / Indoor

Material Metal - Methacrylate  
Finish .00 Standard

Note Floor luminaire. Matt white diffuser. RGB wireless control. Transparent cable.




## PABLO

70W  
120V - 60Hz  
Driver integrated  
Dimmer on board  
RGB wireless control

Standard - RGB - Dimmer on board

| 1A2730003.99.06 |



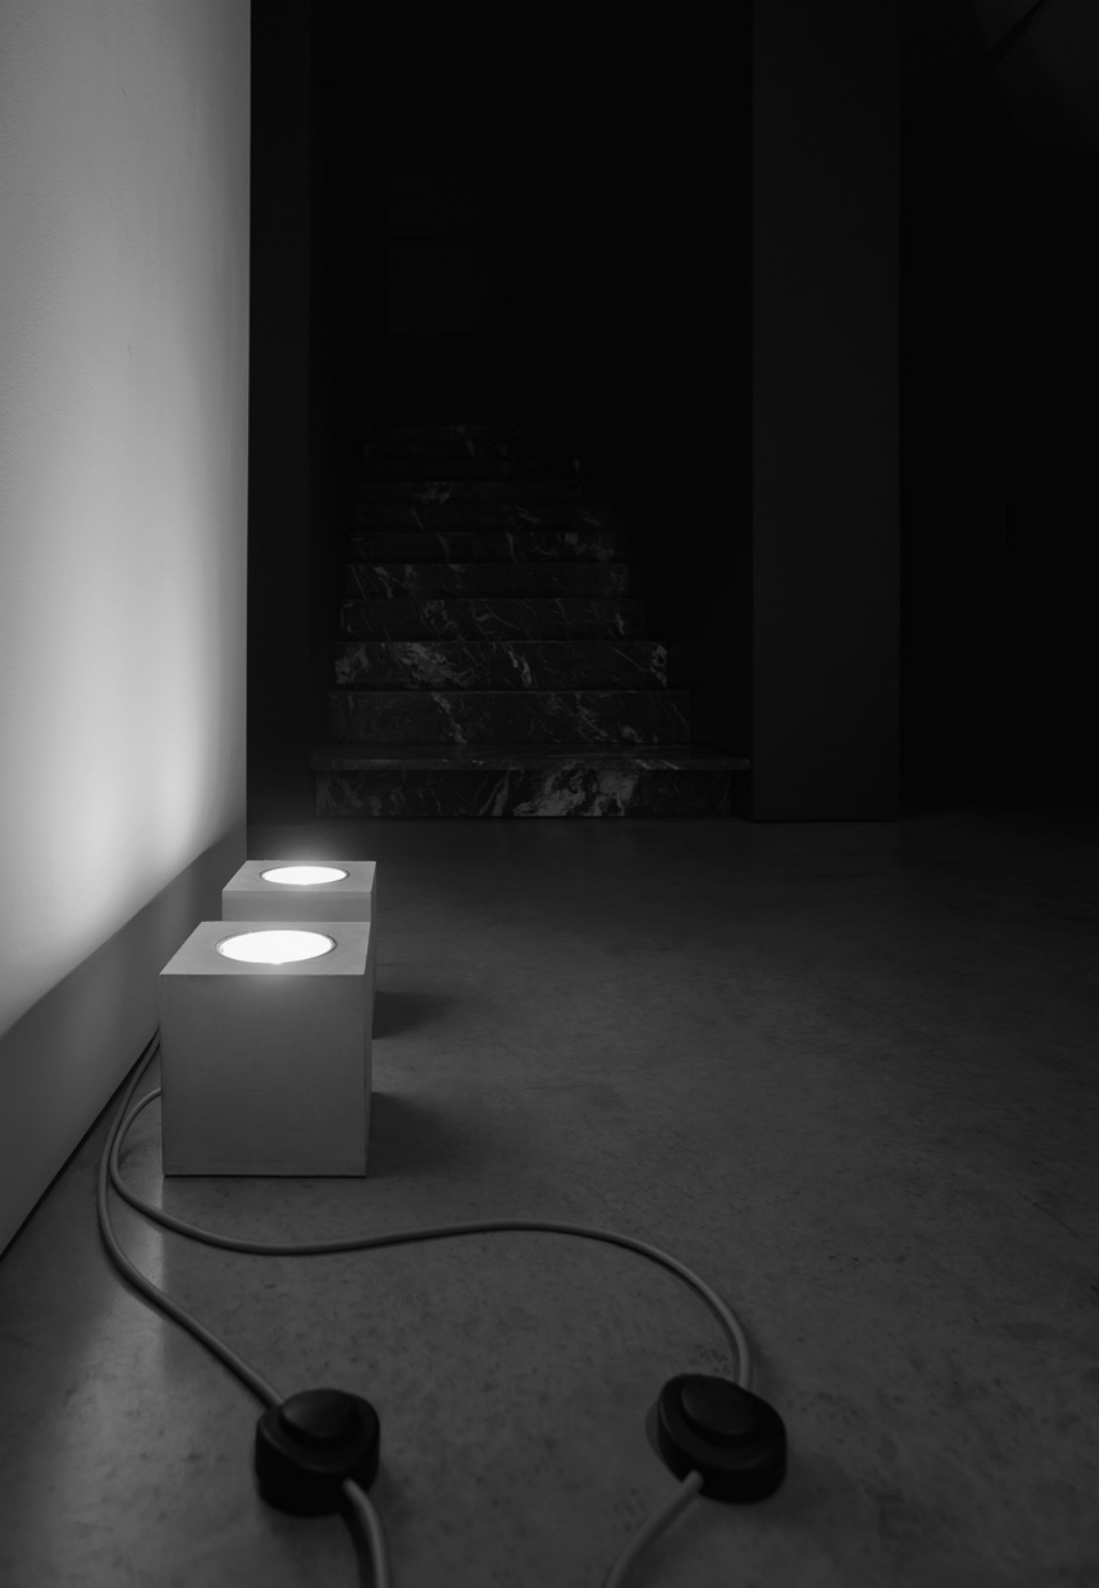

A piece of architecture to be used in space.  
A concrete cube that allows you to understand volumes  
and architecture in an unusual and unprecedented way.  
Outdoor version also available.


# Q

Alberto Zattin / 2000

Floor / Direct / Indoor

**Material** Cement - Metal  
**Finish** .00 Standard

**Note** Floor luminaire. Concrete body. Black cable.



**Q**  
Max 10W - GU10  
120V - 60Hz  
ON/OFF  
Bulb not included

Standard - ON/OFF

| 1A2760003.00.00 |





A special project, an authentic ready-made.  
Obtained from a flexible fishing rod, it is a delicate and elegant sign,  
which brings to mind the subtle branches of a willow tree  
or bamboo canes floating on a light breeze.  
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,  
and being amazed by so much weightlessness.  
The light is the fisherman's line, catching faces, gazes, people.  
Available in 4 different heights and also in an outdoor version.


**XXIII Compasso d'Oro ADI Award 2014**  
**Elle Deco International Design Award 2011**



Floor / Direct / Indoor

**Material** Glass fiber - Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

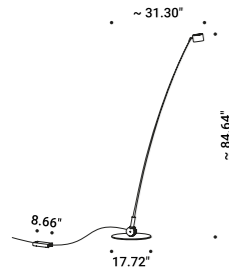


**SAMPEI 230**

17W  
 120V - 60Hz  
 2700K - 1370lm / 3000K - 1456lm  
 CRI >90  
 Driver integrated  
 Dimmer on board



Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A3730303.27.06  
 1A3730303.30.06  
 1A3730403.27.06  
 1A3730403.30.06




**SAMPEI 260**

17W  
 120V - 60Hz  
 2700K - 1370lm / 3000K - 1456lm  
 CRI >90  
 Driver integrated  
 Dimmer on board



Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A3740303.27.06  
 1A3740303.30.06  
 1A3740403.27.06  
 1A3740403.30.06




**SAMPEI 290**

17W  
 120V - 60Hz  
 2700K - 1370lm / 3000K - 1456lm  
 CRI >90  
 Driver integrated  
 Dimmer on board



Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A3750303.27.06  
 1A3750303.30.06  
 1A3750403.27.06  
 1A3750403.30.06



**SAMPEI 440**

17W  
 120V - 60Hz  
 2700K - 1491lm / 3000K - 1584lm  
 CRI >90  
 Driver integrated  
 Dimmer on board



Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A3760303.27.06  
 1A3760303.30.06  
 1A3760403.27.06  
 1A3760403.30.06

Optional accessories


Other accessories




**Accessory holder + Soft filter + Honeycomb louvre** Not included  
 Matt Black 1X0070400.04.00




**Accessory holder + Elliptical filter** Not included  
 Matt Black 1X0070400.05.00



**Blue filter** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.06.00



**Red filter** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.07.00



**Yellow filter** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.08.00





## SHOJI

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.  
Outdoor version also available.

# SHOJI


Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

**Material** Metal - PBT - Polycarbonate

**Finish** .00 Standard

**Note** Floor luminaire. Hand-stitched shade. Matt black stems. Dimmer on the cable. Black cable.



## SHOJI

Max 18W - E26

120V - 60Hz

Dimmer on board

Bulb not included

Standard - Dimmer on board

| 1A2780003.00.06 |



**SUSPENSION**

## CARTESIO

Davide Groppi / 2018



A thin, circular mirror is suspended to provide light, combining both direct and indirect lighting. A sophisticated clamping system is used to position the disc wherever you want, without the need for wall or ceiling wires.

# CARTESIO


Davide Groppi / 2018

Suspension / Direct-Indirect / Indoor

Material Metal - Methacrylate

Finish .00 Standard

Note Suspension luminaire. Disc with mirror finish. Matt red rear disc. Matt white rose. AISI 304 stainless steel suspension cables. Dual emission. White cable.




## CARTESIO 60

15,5W  
120V - 60Hz  
3000K - Down 300lm - Up 930lm  
Down CRI >80 - Up CRI >90  
Driver integrated  
1-10V

Standard - 3000K - 1-10V

| 1A3190003.30.03 |



## CARTESIO 90

15,5W  
120V - 60Hz  
3000K - Down 300lm - Up 930lm  
Down CRI >80 Up CRI >90  
Driver integrated  
1-10V

Standard - 3000K - 1-10V

| 1A0070003.30.03 |





## CATHODE


Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.  
The shape brings to mind a light bulb that was never born.  
Think steampunk: situations in which instruments were inspired by  
the rudiments of electricity. The classic light bulb that has no future  
becomes a wonderful device made of luminous diodes.  
What would the past have looked like if the future had arrived first?  
Luminaire available also in ENDLESS version.

Suspension / Diffuse / Indoor

**Material** Blown glass - Metal  
**Finish** .03 Matt White .08 Brushed Brass

**Note** Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the brushed brass finish. Single rose for more than one lamp on request. CATHODE 2: plasterboard version with magnetic fixing flat rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

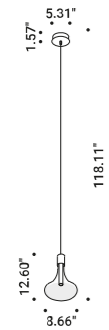

**CATHODE 1**

Ceiling driver version  
 5,6W  
 120V - 60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 ON/OFF



Matt White - 2700K - ON/OFF  
 Matt White - 3000K - ON/OFF  
 Brushed Brass - 2700K - ON/OFF  
 Brushed Brass - 3000K - ON/OFF

1A2980303.27.00  
 1A2980303.30.00  
 1A2980803.27.00  
 1A2980803.30.00



**CATHODE 1**

Ceiling driver version  
 6W  
 120V - 60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 DALI



Matt White - 2700K - DALI  
 Matt White - 3000K - DALI  
 Brushed Brass - 2700K - DALI  
 Brushed Brass - 3000K - DALI

1A2980303.27.01  
 1A2980303.30.01  
 1A2980803.27.01  
 1A2980803.30.01



**CATHODE 1**

Ceiling driver version  
 6W  
 120V - 60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 1-10V



Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Brushed Brass - 2700K - 1-10V  
 Brushed Brass - 3000K - 1-10V

1A2980303.27.03  
 1A2980303.30.03  
 1A2980803.27.03  
 1A2980803.30.03




**CATHODE 2**

Remote driver version  
 4W  
 Max 350mA DC  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver not included

Matt White - 2700K  
 Matt White - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K

1A2990303.27.20  
 1A2990303.30.20  
 1A2990803.27.20  
 1A2990803.30.20

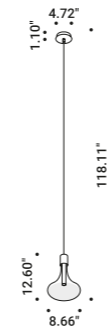

**CATHODE ENDLESS**

ENDLESS version only  
 5,5W  
 48V DC  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver not included  
 See page ENDLESS



Matt White - 2700K  
 Matt White - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K


1A2980303.27.40  
 1A2980303.30.40  
 1A2980803.27.40  
 1A2980803.30.40

# CATHODE


Omar Carraglia / 2015

## Compulsory accessories

Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350	



Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	CATHODE 2	1Z0240870.350	





## FOSBURY

Davide Groppi / 2014



A lamp that interprets the classic theme of decentralization.  
An acrobatic and apparently precarious presence, bringing light where you prefer it,  
starting from a simple wall socket.  
**AZ Award 2016**


# FOSBURY

Davide Groppi / 2014

Suspension / Direct-Indirect / Indoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Suspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable.



## FOSBURY

15W  
120V - 60Hz  
2700K - Down 525lm - Up 59lm /  
3000K - Down 560lm - Up 59lm  
CRI >90  
UGR <19  
Driver integrated  
ON/OFF



Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF

1A2590403.27.00  
1A2590403.30.00

## Optional accessories

Suspension kits



Sloped ceiling suspension kit

Not included


Nickel plated - 1 Piece

1A0510000.00.00



**LED IS MORE**

Daide Groppi / 2011

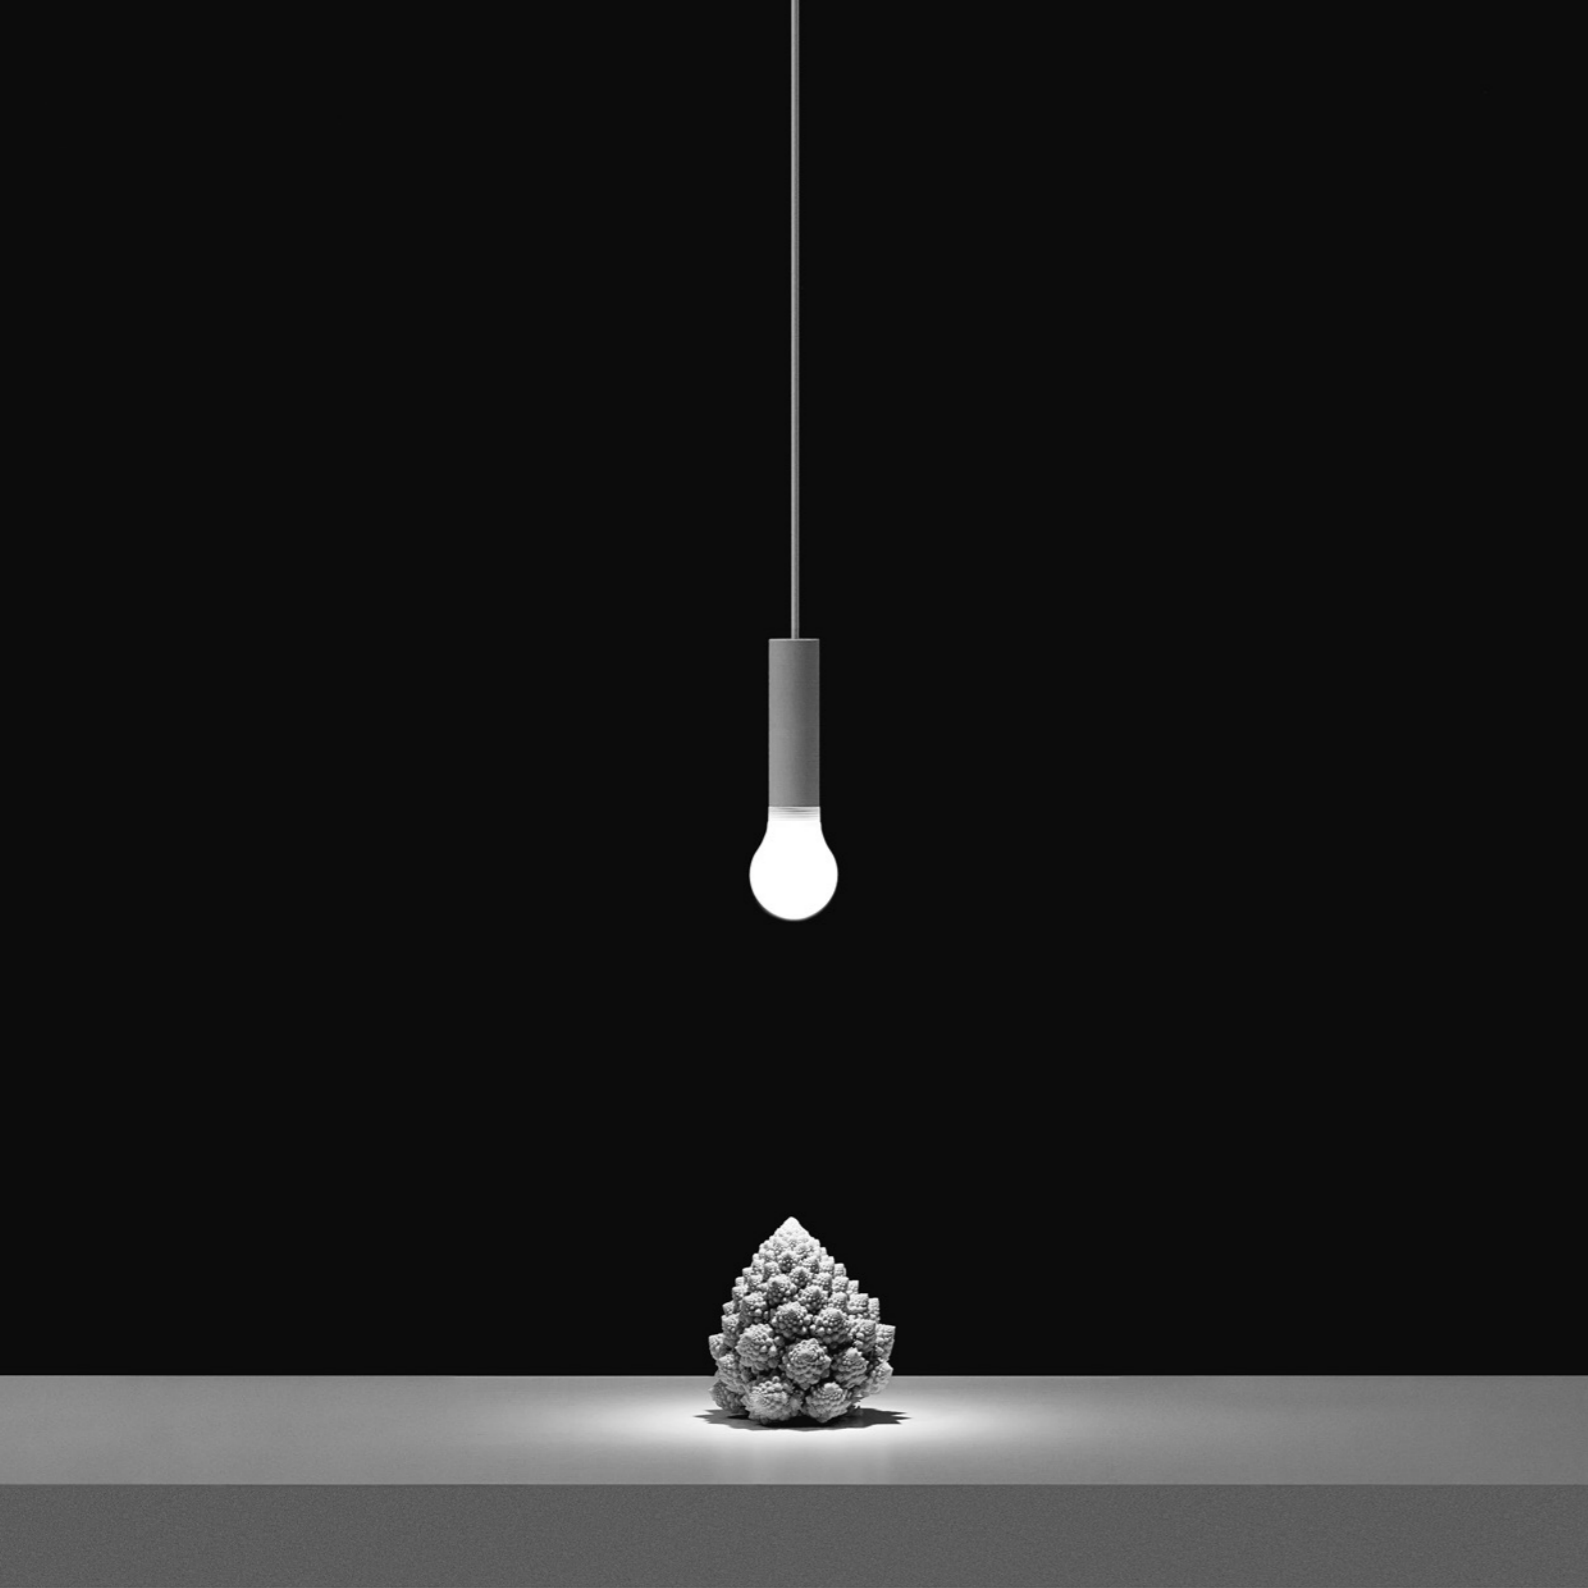

A tribute to Mies van der Rohe and his Less is More.  
The project represents a light icon in a LED key,  
with a peculiar attention to energy savings and the quality of light.


## LED IS MORE

Davide Groppi / 2011

Suspension / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Suspension luminaire. Sanded methacrylate diffuser. Matt white rose.  
White cable. Single rose for more than one lamp on request.



### LED IS MORE

5,6W  
120V - 60Hz  
3000K - 354lm  
CRI >90  
Driver integrated  
ON/OFF

Matt White - 3000K - ON/OFF

| 1A2790303.30.00 |





## LOUIS XIV


Davide Groppi / 2023

Louis XIV is the freakiest letter of our light alphabet.  
It's a disobedient design that translates a certain rebellion  
to common lamp models into light.  
I wanted to investigate the idea of the chandelier: in line with our poetics,  
Louis XIV is the only possible solution for lightness and irony.  
Dimmable suspension lamp with double emission.

Suspension / Direct-Indirect / Indoor

**Material** Glass - Metal  
**Finish** .19 Polished Gold

**Note** Suspension luminaire. Eighty crystal drops and a bird. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.

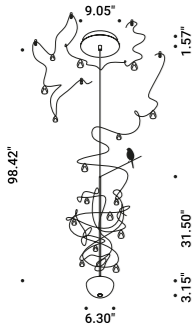


**LOUIS XIV 1**

Ceiling driver version  
 16,5W  
 120V - 60Hz  
 2700K - Up 890lm - Down 210lm /  
 3000K - Up 936lm - Down 235lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 TRIAC/IGBT



Polished Gold - 2700K - TRIAC/IGBT  
 Polished Gold - 3000K - TRIAC/IGBT

1A4361903.27.02  
 1A4361903.30.02

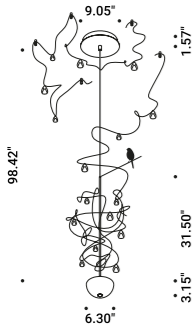


**LOUIS XIV 1**

Ceiling driver version  
 16,5W  
 120V - 60Hz  
 2700K - Up 890lm - Down 210lm /  
 3000K - Up 936lm - Down 235lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 DALI - PUSH - 1-10V



Polished Gold - 2700K - DALI - PUSH - 1-10V  
 Polished Gold - 3000K - DALI - PUSH - 1-10V

1A4361903.27.07  
 1A4361903.30.07

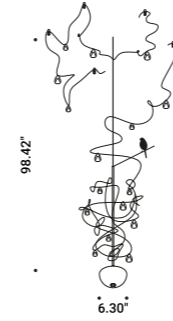

**LOUIS XIV 2**

Remote driver version  
 15W  
 Max 250mA DC  
 2700K - Up 890lm - Down 210lm /  
 3000K - Up 936lm - Down 235lm  
 CRI >90  
 UGR <19  
 Driver not included  
 2 Drivers required




Polished Gold - 2700K  
 Polished Gold - 3000K


1A4361903.27.20  
 1A4361903.30.20

**Compulsory accessories**


**Drivers**



<b>Driver</b>				Not included
120-240V	250mA/12W/IP64/TRIAC - 1-10V	LOUIS XIV 2	1Z2330010	



<b>Driver</b>				Not included
110-240V	250mA/10W/IP20/TRIAC - 1-10V	LOUIS XIV 2	1Z2340010.250	



<b>Driver</b>				Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH - 1-10V	LOUIS XIV 2	1Z0241270.250	

**Optional accessories**

**Suspension kits**



<b>Recessed suspension kit for 0.49" plasterboard</b>				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	LOUIS XIV 2	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	LOUIS XIV 2	1X0000400.05.00	



# MAGIA

Michele Groppi / 2023



Light and transparency are the true stars of this project. We have always liked to think heretically, evoking mystery, magic and seduction. Magia is the new modular suspension lighting system that can be adapted to suit the different heights of the rooms and can generate direct and indirect light with the 360° adjustable module.


In this case, the lens is not used to focus, but to modify the vision and perception of the object.

The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency. Luminaire designed also to be powered by ENDLESS conductive tape.


**Archiproducts Design Award 2023**




Single installation with ceiling driver

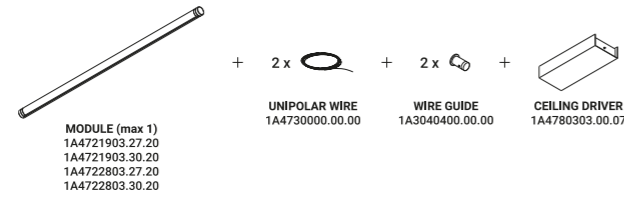


Multiple installation with ceiling driver

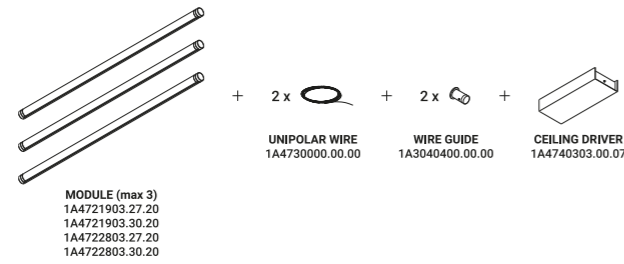

Single installation with recessed or ceiling suspension kit

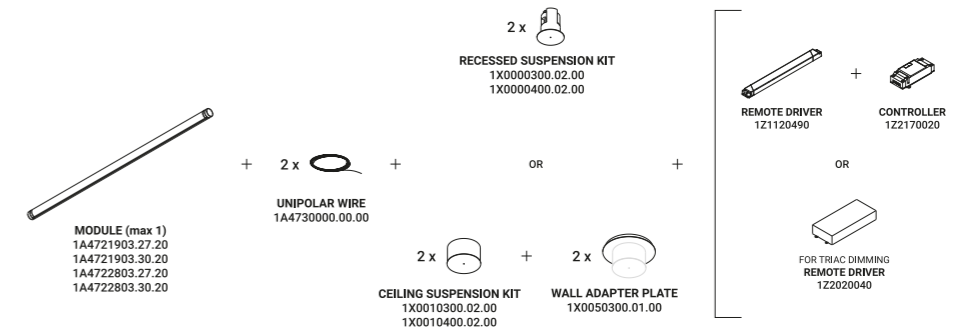


Multiple installation with recessed or ceiling suspension kit

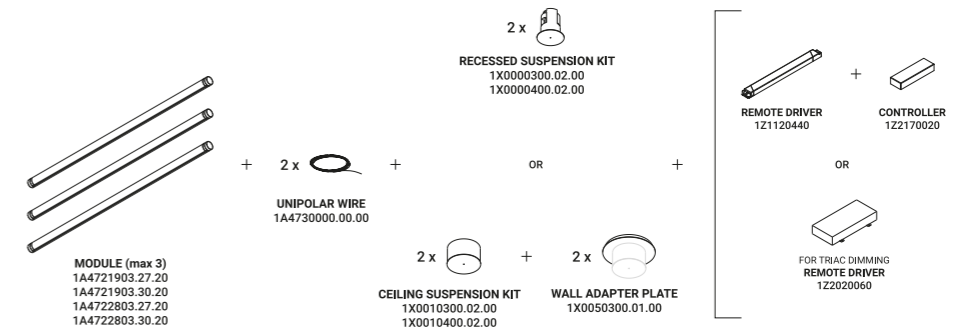

Suspension / Direct-Indirect / Indoor

**Material** Metal - PMMA  
**Finish** .19 Polished Gold .28 Polished Black Chrome

**Note** Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

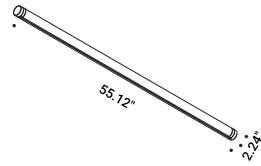

**MAGIA - MODULE**

19W  
 24V DC  
 2700K - 1272lm / 3000K - 1312lm  
 CRI >90  
 Driver not included



Polished Gold - 2700K  
 Polished Gold - 3000K  
 Polished Black Chrome - 2700K  
 Polished Black Chrome - 3000K

1A4721903.27.20  
 1A4721903.30.20  
 1A4722803.27.20  
 1A4722803.30.20

**Compulsory accessories**


**Installation kits**



<b>Wire guide</b> <span style="float: right;">Not included</span>			
Matt Black	1 Piece		1A3040400.00.00

<b>Unipolar wire - 236.22"</b> <span style="float: right;">Not included</span>			
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

**Suspension kits**




<b>Recessed suspension kit for 0.49" plasterboard</b> <span style="float: right;">Not included</span>			
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000300.02.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000400.02.00

<b>Ceiling suspension kit</b> <span style="float: right;">Not included</span>			
Matt White	For electrical cables - 1 Piece		1X0010300.02.00
Matt Black	For electrical cables - 1 Piece		1X0010400.02.00


<b>Wall adapter plate</b> <span style="float: right;">Not included</span>			
Matt White	For mounting on brick masonry walls		1X0050300.01.00

Compulsory accessories


Drivers




<b>Ceiling driver</b>				Not included
Matt White	Input 120V - 60Hz Output 24V - 60W - IP20 DALI - PUSH - 1-10V	Max 1 module	1A4780303.00.07	




<b>Ceiling driver</b>				Not included
Matt White	Input 120V - 60Hz Output 24V - 21W - IP20 DALI - PUSH - 1-10V	Max 3 modules	1A4740303.00.07	




<b>Driver</b>				Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	




<b>Driver</b>				Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440	



<b>Driver</b>				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	Max 1 module	1Z2020040	




<b>Driver</b>				Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	Max 3 modules	1Z2020060	




<b>Controller</b>				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20		1Z2170020	




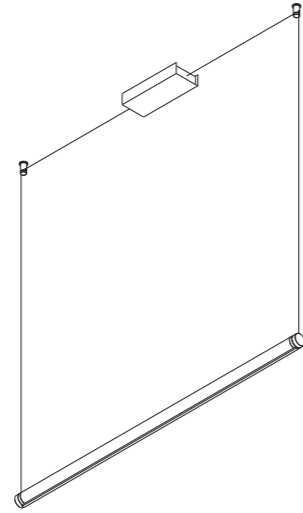


Example of single installation with ceiling driver

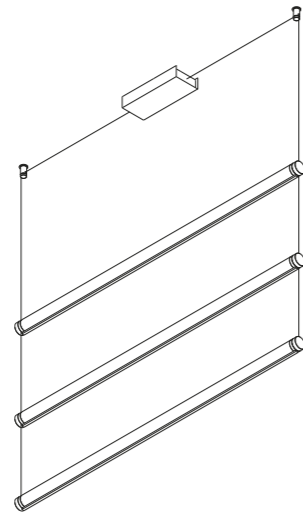


Example of multiple installation with ceiling driver

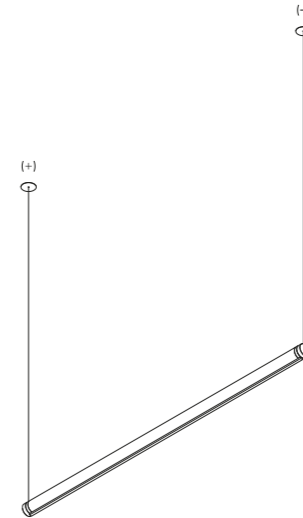


Example of single installation with recessed suspension kit

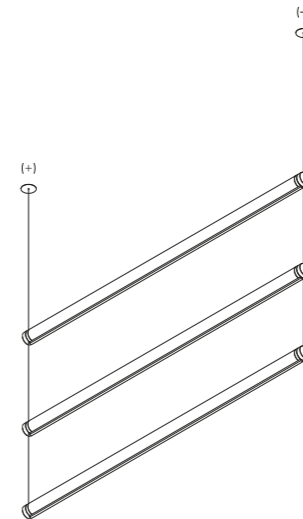


Example of multiple installation with recessed suspension kit

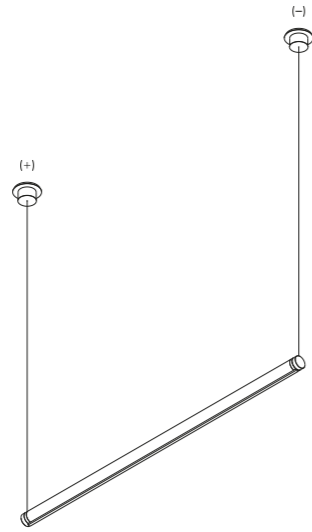

Example of single installation with ceiling suspension kit

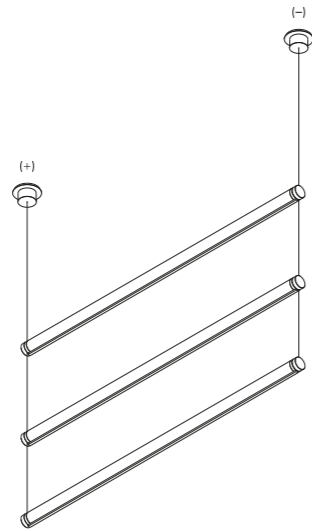

Example of multiple installation with ceiling suspension kit

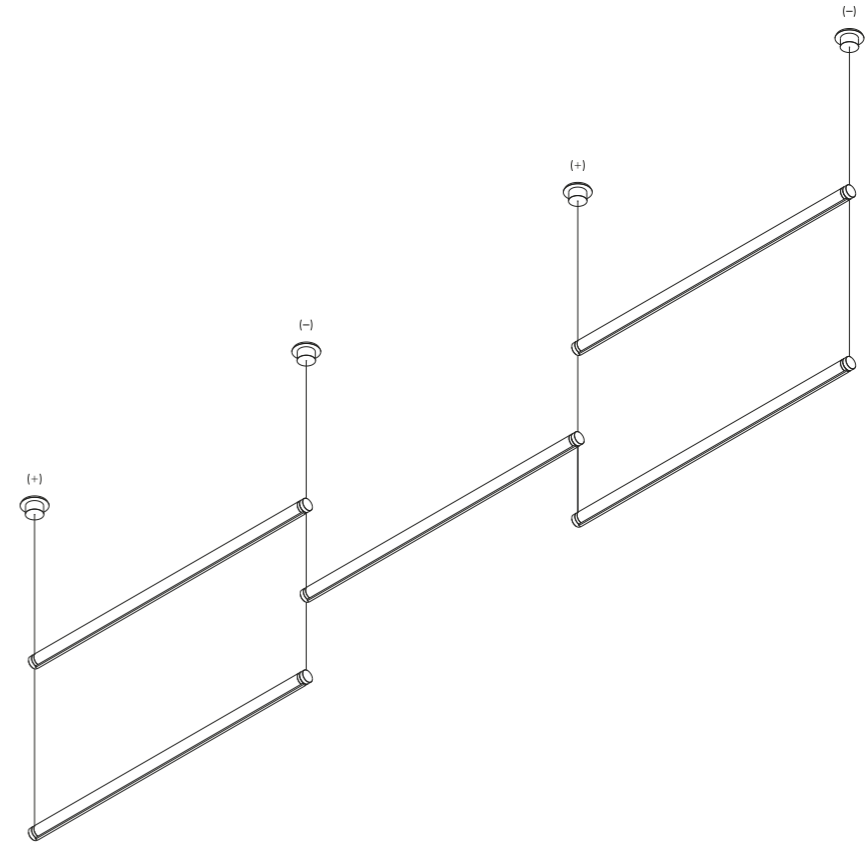

Example of multiple installation | Max 3 modules for cable

# MISS

Omar Carraglia / 2006



So slim and essential...  
The fundamental concept of this project is minimalism.  
A small tube that lights the table with wonder.  
A real dual project: sign and light.  
Luminaire available also in ENDLESS version.

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black .08 Brushed Brass .26 Total Black


**Note** Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the total black and brushed brass finish. Single rose for more than one lamp on request. MISS 2: plasterboard version with magnetic fixing flat rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



**MISS 1**  
 Ceiling driver version  
 5,6W  
 120V - 60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 ON/OFF

Matt White - 2700K - ON/OFF  
 Matt White - 3000K - ON/OFF  
 Matt Black - 2700K - ON/OFF  
 Matt Black - 3000K - ON/OFF  
 Brushed Brass - 2700K - ON/OFF  
 Brushed Brass - 3000K - ON/OFF  
 Total Black - 2700K - ON/OFF  
 Total Black - 3000K - ON/OFF

1A2960303.27.00  
 1A2960303.30.00  
 1A2960403.27.00  
 1A2960403.30.00  
 1A2960803.27.00  
 1A2960803.30.00  
 1A2962603.27.00  
 1A2962603.30.00



**MISS 1**  
 Ceiling driver version  
 6W  
 120V - 60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 DALI

Matt White - 2700K - DALI  
 Matt White - 3000K - DALI  
 Matt Black - 2700K - DALI  
 Matt Black - 3000K - DALI  
 Brushed Brass - 2700K - DALI  
 Brushed Brass - 3000K - DALI  
 Total Black - 2700K - DALI  
 Total Black - 3000K - DALI


1A2960303.27.01  
 1A2960303.30.01  
 1A2960403.27.01  
 1A2960403.30.01  
 1A2960803.27.01  
 1A2960803.30.01  
 1A2962603.27.01  
 1A2962603.30.01



**MISS 1**  
 Ceiling driver version  
 6W  
 120V - 60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 1-10V

Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Matt Black - 2700K - 1-10V  
 Matt Black - 3000K - 1-10V  
 Brushed Brass - 2700K - 1-10V  
 Brushed Brass - 3000K - 1-10V  
 Total Black - 2700K - 1-10V  
 Total Black - 3000K - 1-10V


1A2960303.27.03  
 1A2960303.30.03  
 1A2960403.27.03  
 1A2960403.30.03  
 1A2960803.27.03  
 1A2960803.30.03  
 1A2962603.27.03  
 1A2962603.30.03



**MISS 2**  
 Remote driver version  
 4W  
 Max 350mA DC  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver not included

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K  
 Total Black - 2700K  
 Total Black - 3000K

1A2970303.27.20  
 1A2970303.30.20  
 1A2970403.27.20  
 1A2970403.30.20  
 1A2970803.27.20  
 1A2970803.30.20  
 1A2972603.27.20  
 1A2972603.30.00




**MISS ENDLESS**  
 Endless version only  
 5,5W  
 48V DC - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver not included  
 See page ENDLESS

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K  
 Total Black - 2700K  
 Total Black - 3000K


1A2960303.27.40  
 1A2960303.30.40  
 1A2960403.27.40  
 1A2960403.30.40  
 1A2960803.27.40  
 1A2960803.30.40  
 1A2962603.27.40  
 1A2962603.30.40

Compulsory accessories

Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	



Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	1Z0240870.350	





## MOON

Daide Groppi / 2005





Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Table and floor versions available.

Suspension / Diffuse / Indoor

**Material** Japanese paper - PE  
**Finish** .00 Standard


**Note** Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. MOON 60 DE: version with dual emission and on/off. Black cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 and MOON 200 models.




**MOON 60**  
 Max 25W - E26  
 120V - 60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  


Standard - ON/OFF


| 1A2820003.00.00 |

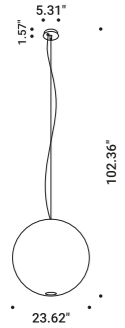


**MOON 60 DE**  
 Dual emission  
 Max 25W - E26  
 120V - 60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  


Standard - ON/OFF


| 1A2830003.00.00 |




**MOON 80**  
 Max 25W - E26  
 120V - 60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  


Standard - ON/OFF


| 1A2840003.00.00 |

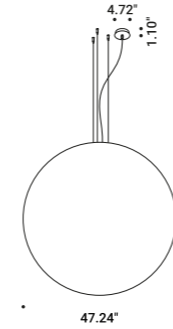


**MOON 120**  
 Max 2x25W - E26  
 120V - 60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  
 Wooden crate included  


Standard - ON/OFF

| 1A2850003.00.00 |

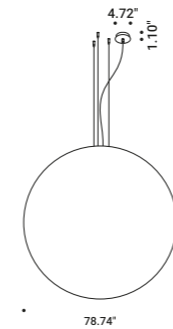

**MOON 200**  
 Max 4x25W - E26  
 120V - 60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  
 Wooden crate included  


Standard - ON/OFF

| 1A2860003.00.00 |

# MOON

Davide Groppi / 2005

## Optional accessories

### Suspension kits



<b>Sloped rose suspension kit</b>				Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / 1A0520000.00.00			
	MOON 80			



<b>Sloped ceiling suspension kit</b>				Not included
Nickel plated - 1 Piece	MOON 120	1A0510000.00.00		

### Other accessories

<b>Moisture barrier bag</b>				Not included
Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010		

<b>Moisture barrier bag</b>				Not included
Packaging for air and sea shipping	MOON 80	4A2840010		

<b>Moisture barrier bag</b>				Included
Packaging for air and sea shipping	MOON 120	49860020		

<b>Moisture barrier bag</b>				Included
Packaging for air and sea shipping	MOON 200	48780030		

<b>Wooden crate</b>				Included
Packaging for air and sea shipping	MOON 120	49860010		


<b>Wooden crate</b>				Included
Packaging for air and sea shipping	MOON 200	48780020		



## NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.  
A simple project, almost a revival of the old electrical wiring.  
A plug, a cable, some isolators, a socket and a LED.  
Outdoor version also available.  
**Design Plus Award 2014**

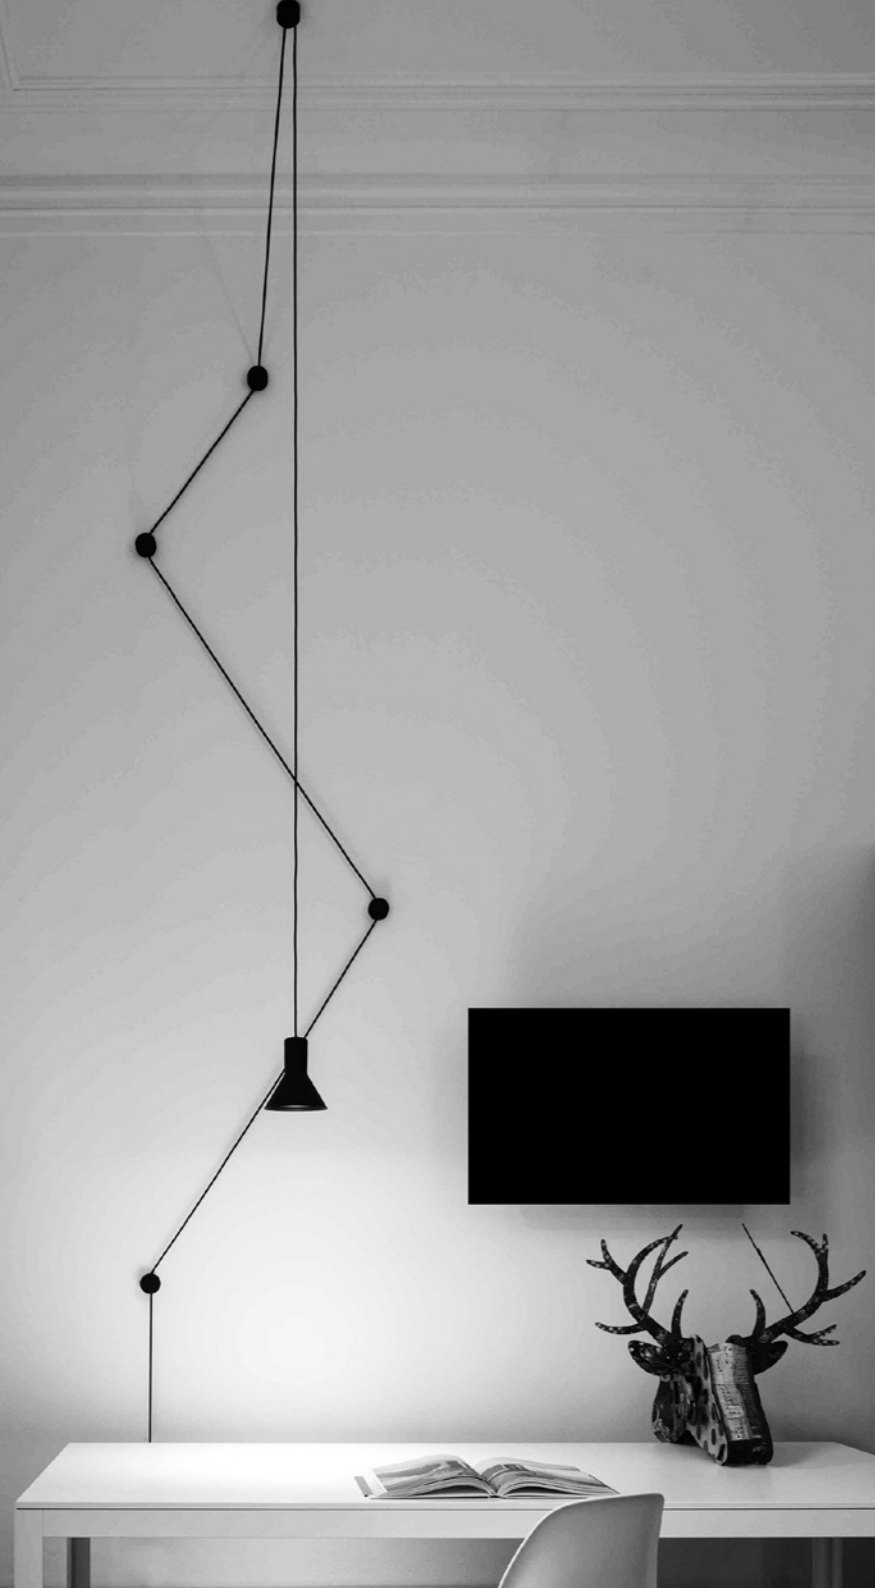


# NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Suspension luminaire. Five cable clips included. Matt white cable clips and white cable for the matt white finish. Matt black cable clips and black cable for the matt black finish.

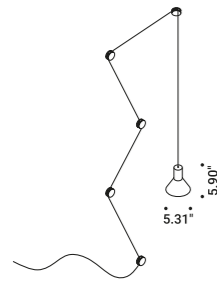

## NEURO

Max 10W - GU10  
 120V - 60Hz  
 ON/OFF  
 Bulb not included




Matt White - ON/OFF  
 Matt Black - ON/OFF

1A0160303.00.00  
 1A0160403.00.00

## Optional accessories


Installation kits



### Wall and ceiling rose

Not included

Matt White	1A3440303.00.00
Matt Black	1A3440403.00.00




### Clamp

Included

Matt White	1 Piece	1A3270300.00.00
Matt Black	1 Piece	1A3270400.00.00



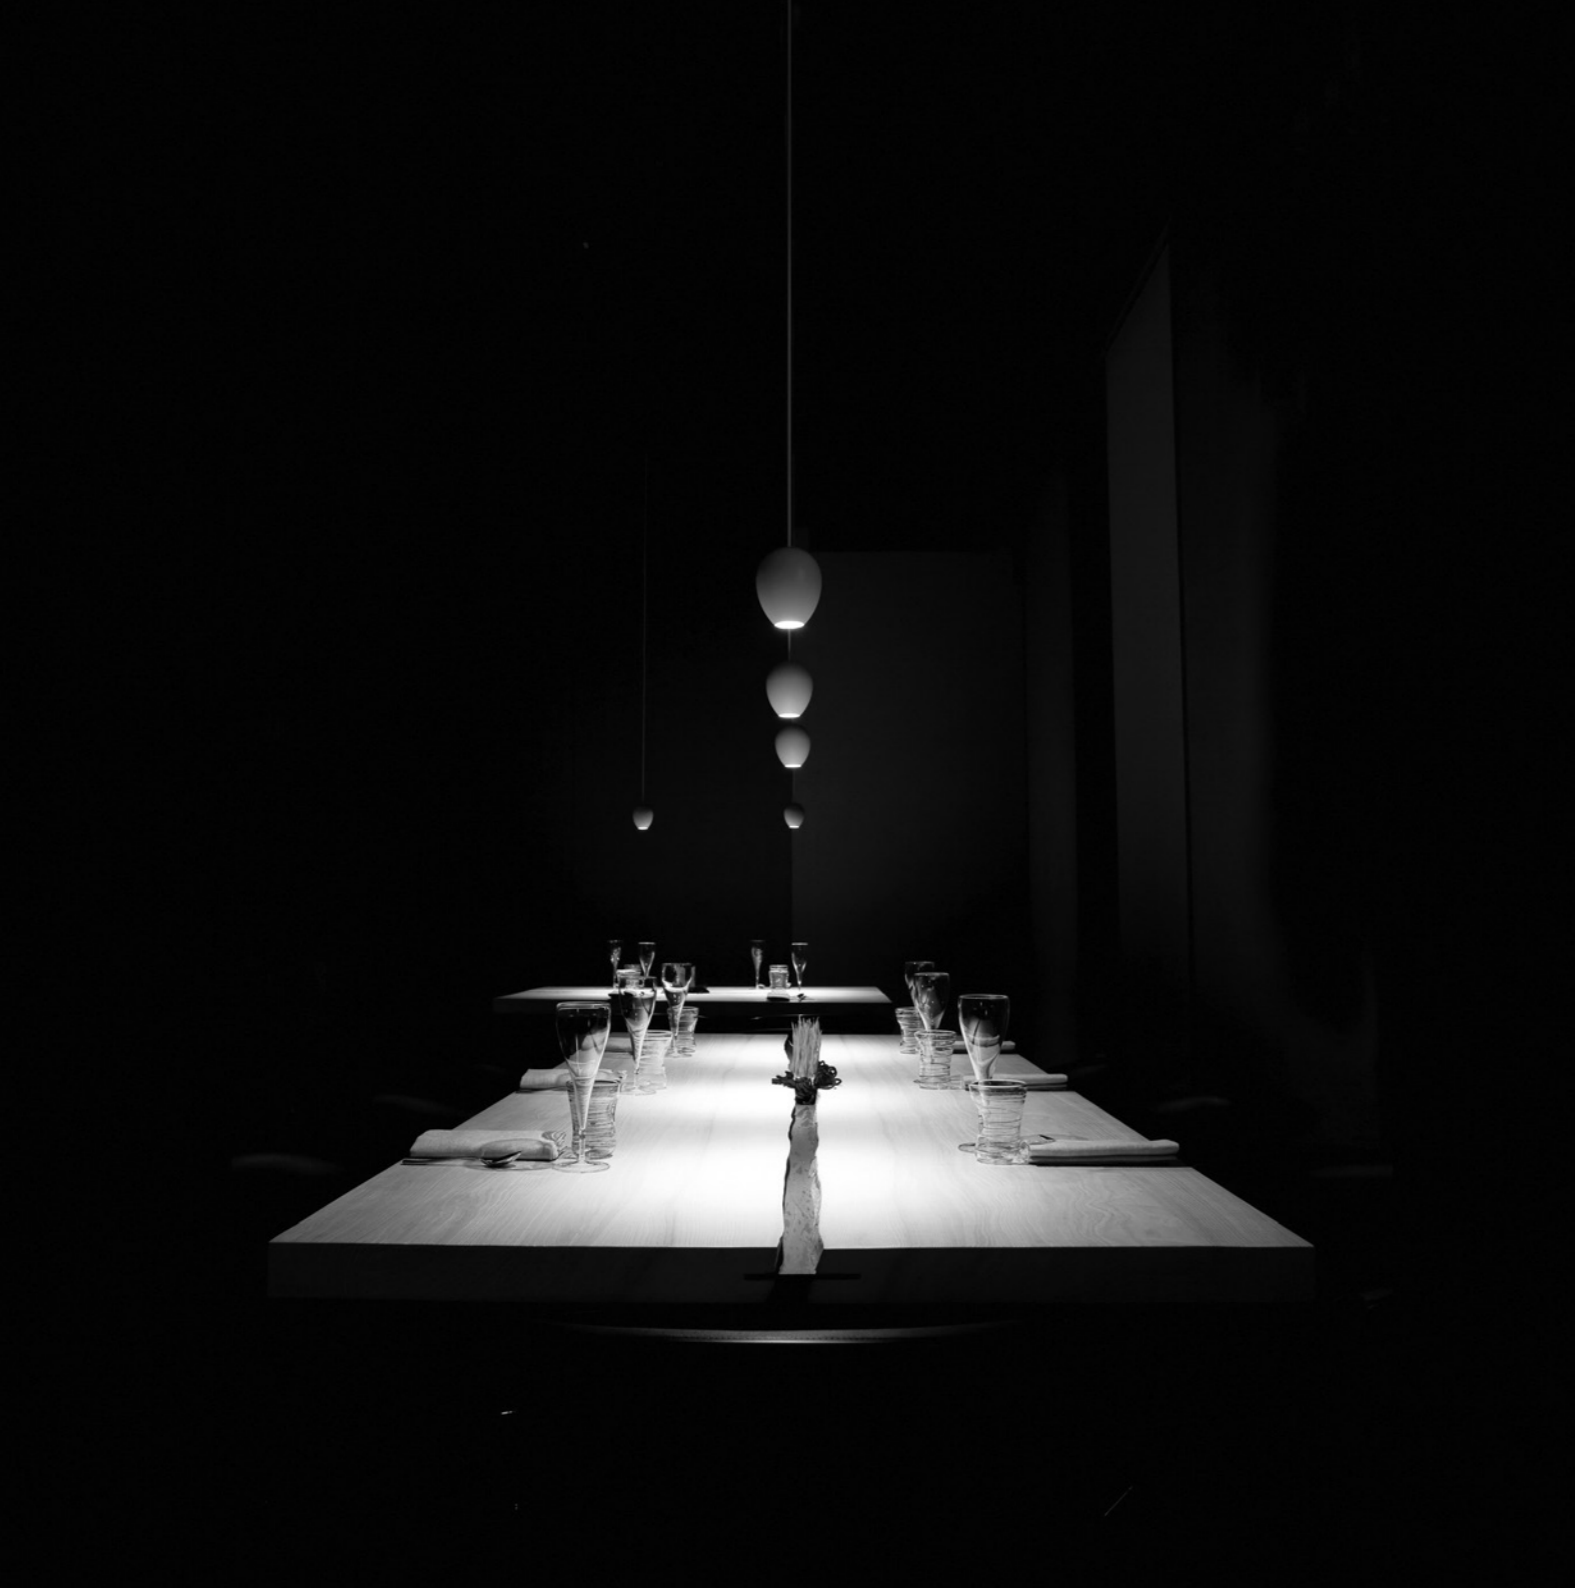

The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.


# OVO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Suspension luminaire. Matt white rose. White cable.



## OVO

Max 20W - GU4 - 12V  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF

| 1A2890303.00.00 |



## OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010



The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.




# OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material Metal  
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable.



**OVONELPIATTO**  
Max 20W - GU4 - 12V  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF

| 1A2880303.00.00 |





## REFLEX S

Michele Groppi / 2023

A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.


Wall version also available.

Luminaire designed also to be powered by ENDLESS conductive tape.

Suspension / Indirect / Indoor

**Material** Metal - Mirror  
**Finish** .04 Matt Black

**Note** Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. REFLEX S 2: version with power cable only and without rose.

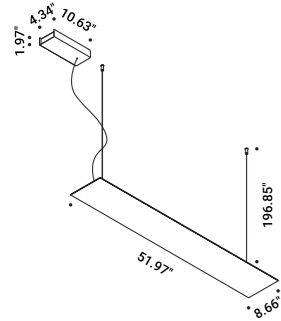


**REFLEX S 1**

Ceiling driver version  
 36W  
 120V - 60Hz  
 2700K - 4196lm / 3000K - 4464lm  
 CRI >90  
 Driver integrated  
 DALI - PUSH - 1-10V

Matt Black - 2700K - DALI - PUSH - 1-10V  
 Matt Black - 3000K - DALI - PUSH - 1-10V

1A4790403.27.07  
 1A4790403.30.07

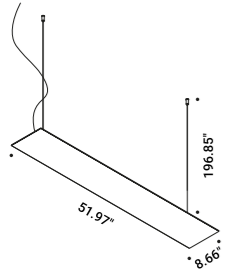

**REFLEX S 2**

Remote driver version  
 33W  
 Max 350mA DC - 60Hz  
 2700K - 4196lm / 3000K - 4464lm  
 CRI >90  
 Driver not included


Matt Black - 2700K  
 Matt Black - 3000K

1A4790403.27.20  
 1A4790403.30.20



**Compulsory accessories**


Drivers




Driver			Not included
220-240V(100-127V)	700mA/50W(40W)/IP20/DALI	REFLEX S 2	1Z0241140.700

**Optional accessories**


Suspension kits



Recessed suspension kit for 0.49" plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	REFLEX S 2	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	REFLEX S 2	1X0000400.04.00



Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00
Matt White	For electrical cables - 1 Piece	REFLEX S 2	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	REFLEX S 2	1X0010400.04.00



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00

# SHANGHAI

Davide Groppi / 2013




The smallest possible shape.  
A suspended luminous segment.  
Beautiful by itself or in composition.  
Suitable for working area or kitchen.

Luminaire designed also to be powered by ENDLESS conductive tape.

Suspension / Direct / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White .08 Brushed Brass

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. SHANGHAI 2: version with power cable only and without rose.




**SHANGHAI 1**

Ceiling driver version  
 15,5W  
 120V - 60Hz  
 2700K - 592lm / 3000K - 619lm  
 CRI >90  
 Driver integrated  
 1-10V

Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Brushed Brass - 2700K - 1-10V  
 Brushed Brass - 3000K - 1-10V

1A3260303.27.03  
 1A3260303.30.03  
 1A3260803.27.03  
 1A3260803.30.03

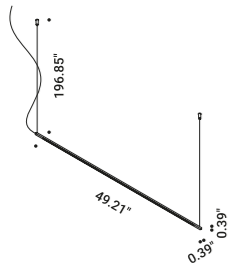

**SHANGHAI 2**

Remote driver version  
 13W  
 24V DC  
 2700K - 592lm / 3000K - 619lm  
 CRI >90  
 Driver not included


Matt White - 2700K  
 Matt White - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K

1A3260303.27.20  
 1A3260303.30.20  
 1A3260803.27.20  
 1A3260803.30.20




**Compulsory accessories**


Drivers



<b>Driver</b>				Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	SHANGHAI 2	1Z0240410	




<b>Driver</b>				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	SHANGHAI 2	1Z2020040	



<b>Controller</b>				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	SHANGHAI 2	1Z2170020	

**Optional accessories**

Suspension kits




<b>Sloped ceiling suspension hook</b>			Not included
	Chrome plated - 1 Piece		1A0530000.00.00



<b>Recessed suspension kit for 0.49" plasterboard</b>				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"		1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SHANGHAI 2	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SHANGHAI 2	1X0000400.04.00	



<b>Ceiling suspension kit</b>				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00	



<b>Wall adapter plate</b>				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	

## SIMBIOSI

Davide Groppi / 2015



A de-structured chandelier that can be re-assembled as you like.  
A conjuring trick that gives you the possibility of connecting the diodes in series  
using very weak electric currents with wires that are practically invisible.  
The very thin wire that connects the light sources and brings them alive,  
one in relation to the other, is the principal component of this project.


# SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .26 Total Black

**Note** Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the matt black finish. AISI 304 stainless steel suspension cables.

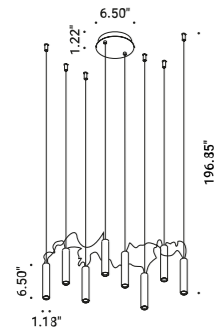

## SIMBIOSI


15W  
 120V - 60Hz  
 2700K - 931lm / 3000K - 960lm  
 CRI >90  
 Driver integrated

DALI



Matt White - 2700K - DALI  
 Matt White - 3000K - DALI  
 Total Black - 2700K - DALI  
 Total Black - 3000K - DALI

1A2870303.27.01  
 1A2870303.30.01  
 1A2872603.27.01  
 1A2872603.30.01

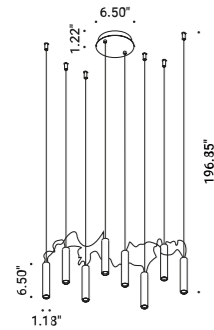

## SIMBIOSI

15W  
 120V - 60Hz  
 2700K - 931lm / 3000K - 960lm  
 CRI >90  
 Driver integrated

1-10V




Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Total Black - 2700K - 1-10V  
 Total Black - 3000K - 1-10V

1A2870303.27.03  
 1A2870303.30.03  
 1A2872603.27.03  
 1A2872603.30.03

## Optional accessories

Suspension kits




**Sloped ceiling suspension hook**

Not included

Chrome plated - 1 Piece


1A0530000.00.00

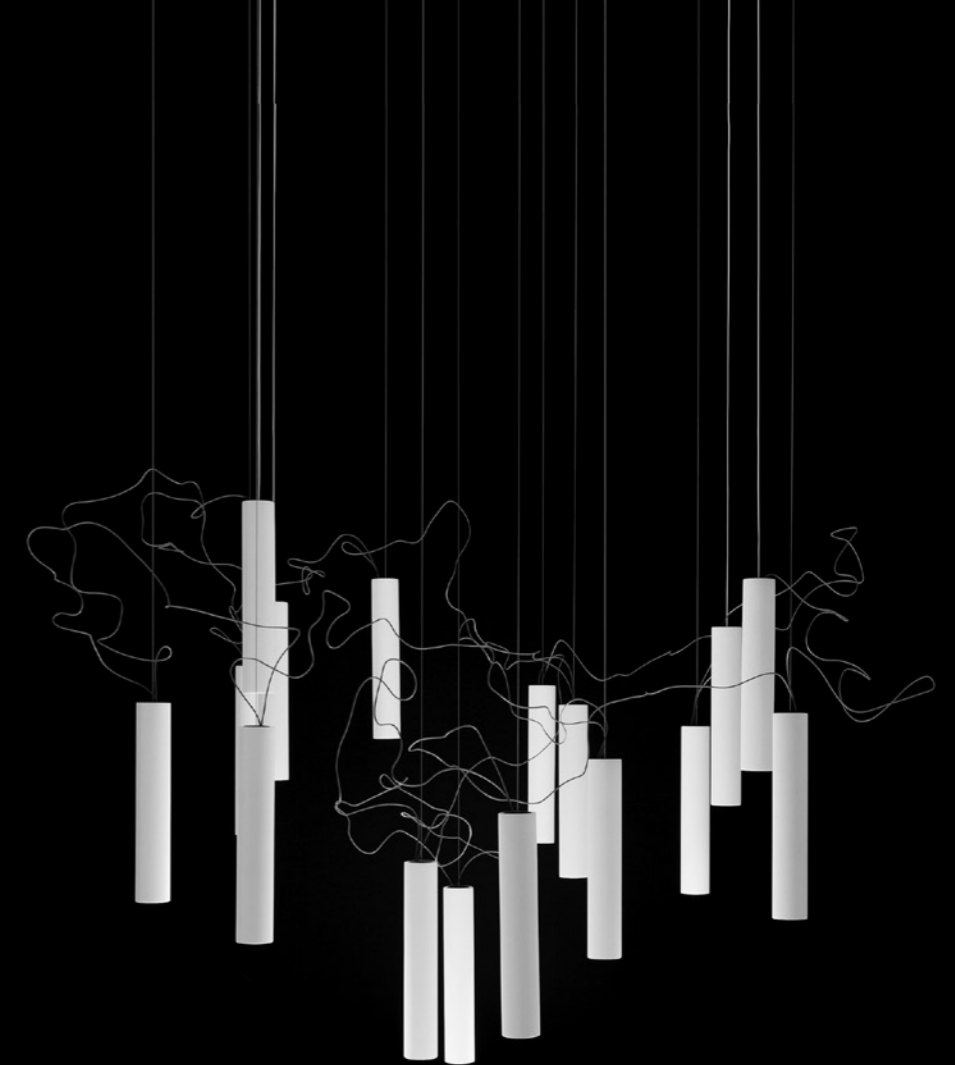

# SOTTILE

Daide Groppi / 2023

A blade of light just 7 millimetres thick,  
the expression of that purest and most essential part of our thought.  
The surprise of an extremely thin, yet at the same time very bright, lamp.  
Luminaire designed also to be powered by ENDLESS conductive tape.

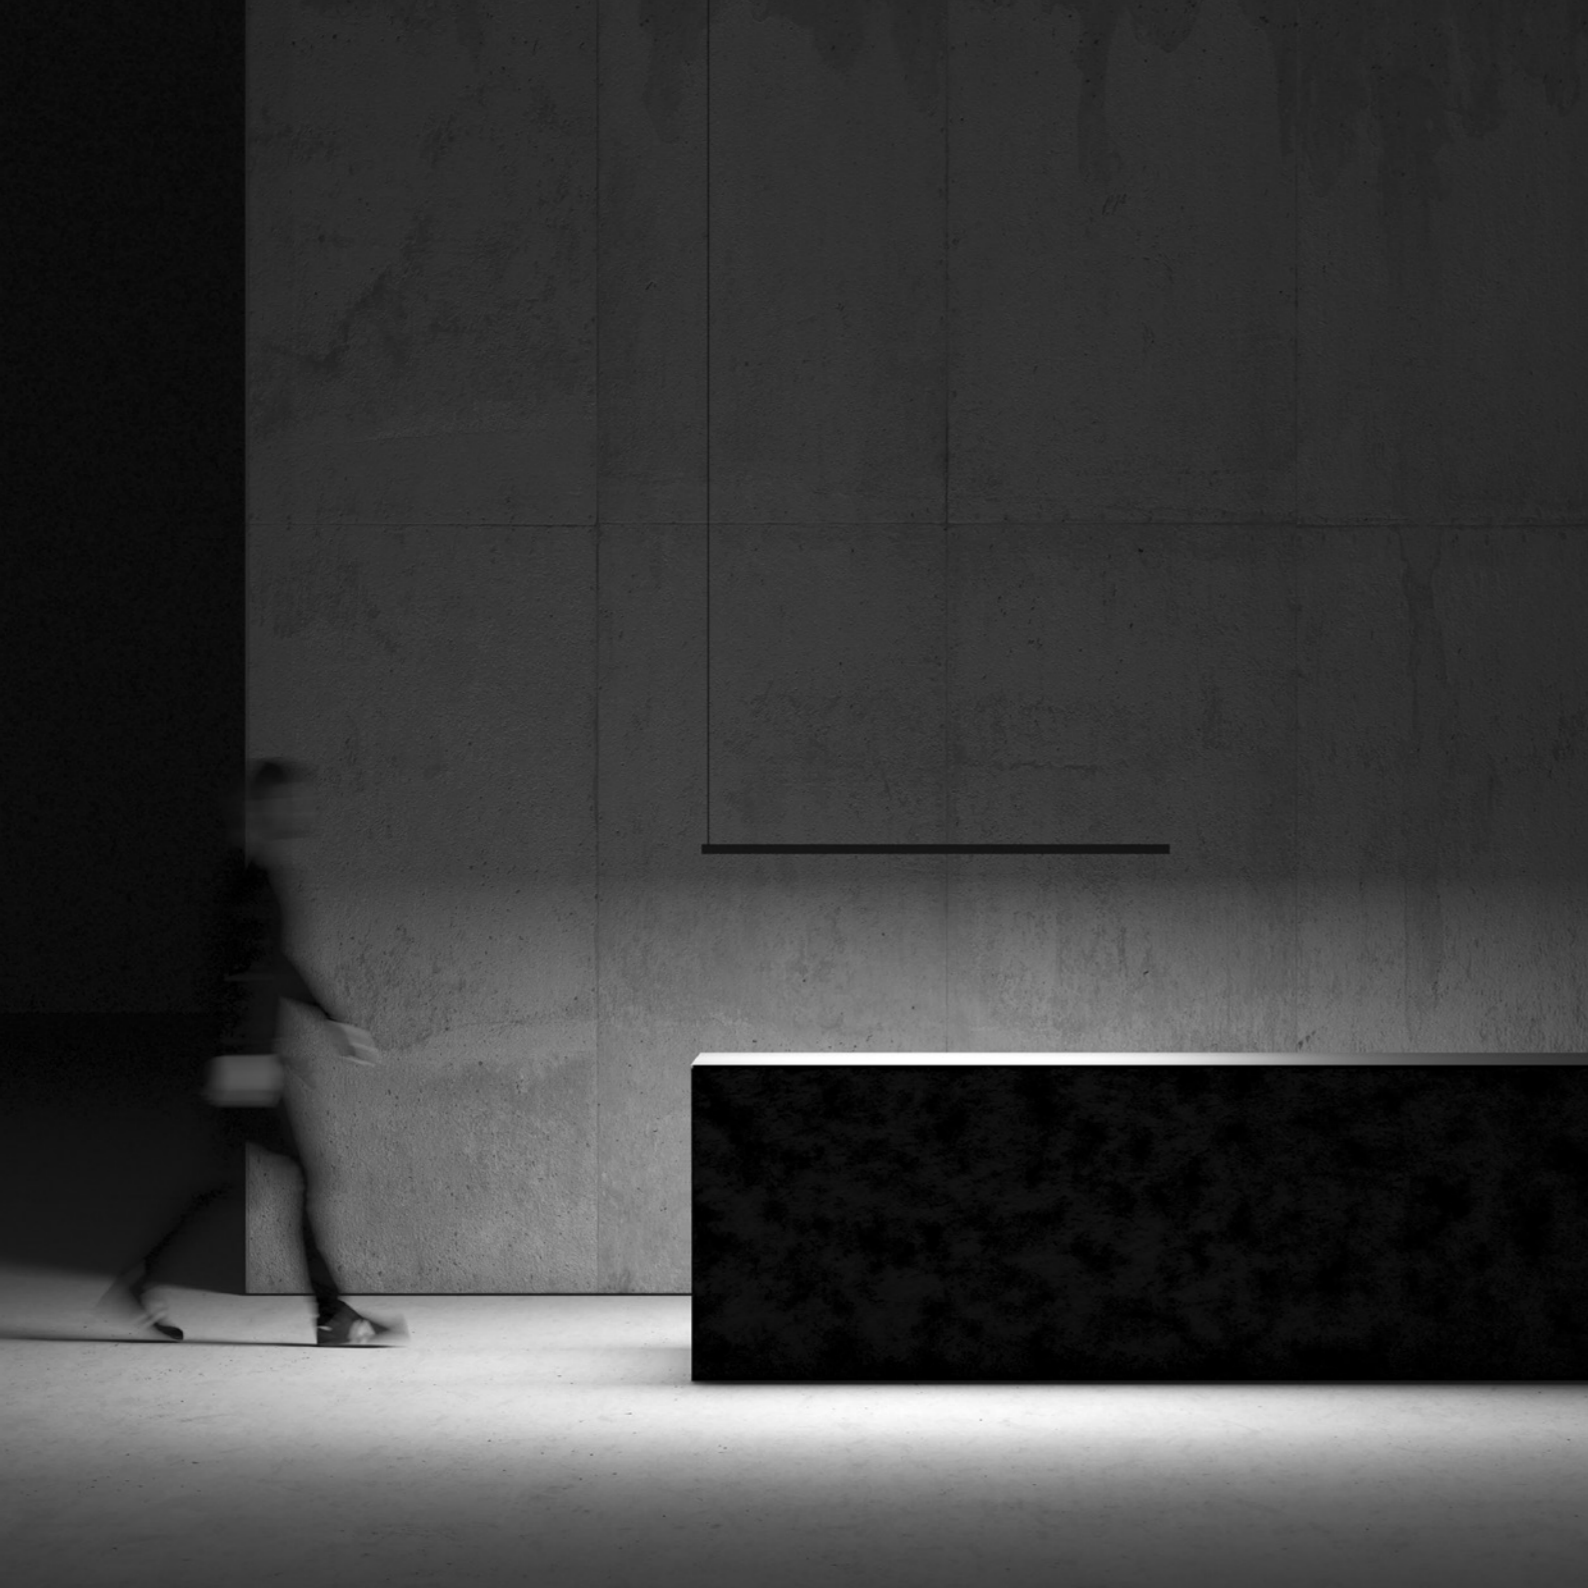




Suspension / Direct / Indoor

**Material** Metal  
**Finish** **.29** Brushed Bronze **.36** Brushed Black


**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. Black cable. Luminaire designed to be powered by our ENDLESS conductive tape and dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. SOTTILE 1 DE and SOTTILE 2 DE: dual emission version. SOTTILE 2 and SOTTILE 2 DE: version with power cable only and without rose.



**SOTTILE 1**

Ceiling driver version  
 22W  
 120V - 60Hz  
 2700K - 1692lm / 3000K - 1855lm  
 CRI >90  
 Driver integrated  
 DALI - PUSH - 1-10V


Brushed Bronze - 2700K - DALI - PUSH - 1-10V	1A4232903.27.07
Brushed Bronze - 3000K - DALI - PUSH - 1-10V	1A4232903.30.07
Brushed Black - 2700K - DALI - PUSH - 1-10V	1A4233603.27.07
Brushed Black - 3000K - DALI - PUSH - 1-10V	1A4233603.30.07



**SOTTILE 1 DE**

Ceiling driver version - Dual emission  
 2x22W  
 120V - 60Hz  
 2700K - Up 1692lm - Down 1692lm /  
 3000K - Up 1855lm - Down 1855lm  
 CRI >90 / 90  
 Driver integrated  
 DALI - PUSH - 1-10V

Brushed Bronze - 2700K - DALI - PUSH - 1-10V	1A4642903.27.07
Brushed Bronze - 3000K - DALI - PUSH - 1-10V	1A4642903.30.07
Brushed Black - 2700K - DALI - PUSH - 1-10V	1A4643603.27.07
Brushed Black - 3000K - DALI - PUSH - 1-10V	1A4643603.30.07




**SOTTILE 2**

Remote driver version  
 19W  
 24V DC  
 2700K - 1692lm / 3000K - 1855lm  
 CRI >90  
 Driver not included



Brushed Bronze - 2700K	1A4232903.27.20
Brushed Bronze - 3000K	1A4232903.30.20
Brushed Black - 2700K	1A4233603.27.20
Brushed Black - 3000K	1A4233603.30.20



**SOTTILE 2 DE**


Remote driver version - Dual emission  
 2x19W  
 24V DC  
 2700K - Up 1692lm - Down 1692lm /  
 3000K - Up 1855lm - Down 1855lm  
 CRI >90 / 90  
 Driver not included




Brushed Bronze - 2700K	1A4642903.27.20
Brushed Bronze - 3000K	1A4642903.30.20
Brushed Black - 2700K	1A4643603.27.20
Brushed Black - 3000K	1A4643603.30.20

**Compulsory accessories**


**Drivers**



<b>Driver</b>				Not included
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE	1Z1120490	



<b>Driver</b>				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	SOTTILE 2 / SOTTILE 2 DE	1Z2020040	



<b>Controller</b>				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	SOTTILE 2 / SOTTILE 2 DE	1Z2170020	

Optional accessories


Suspension kits




Recessed suspension kit for 0.49" plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SOTTILE 2 / SOTTILE 2 DE	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SOTTILE 2 / SOTTILE 2 DE	1X0000400.04.00



Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010400.04.00



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

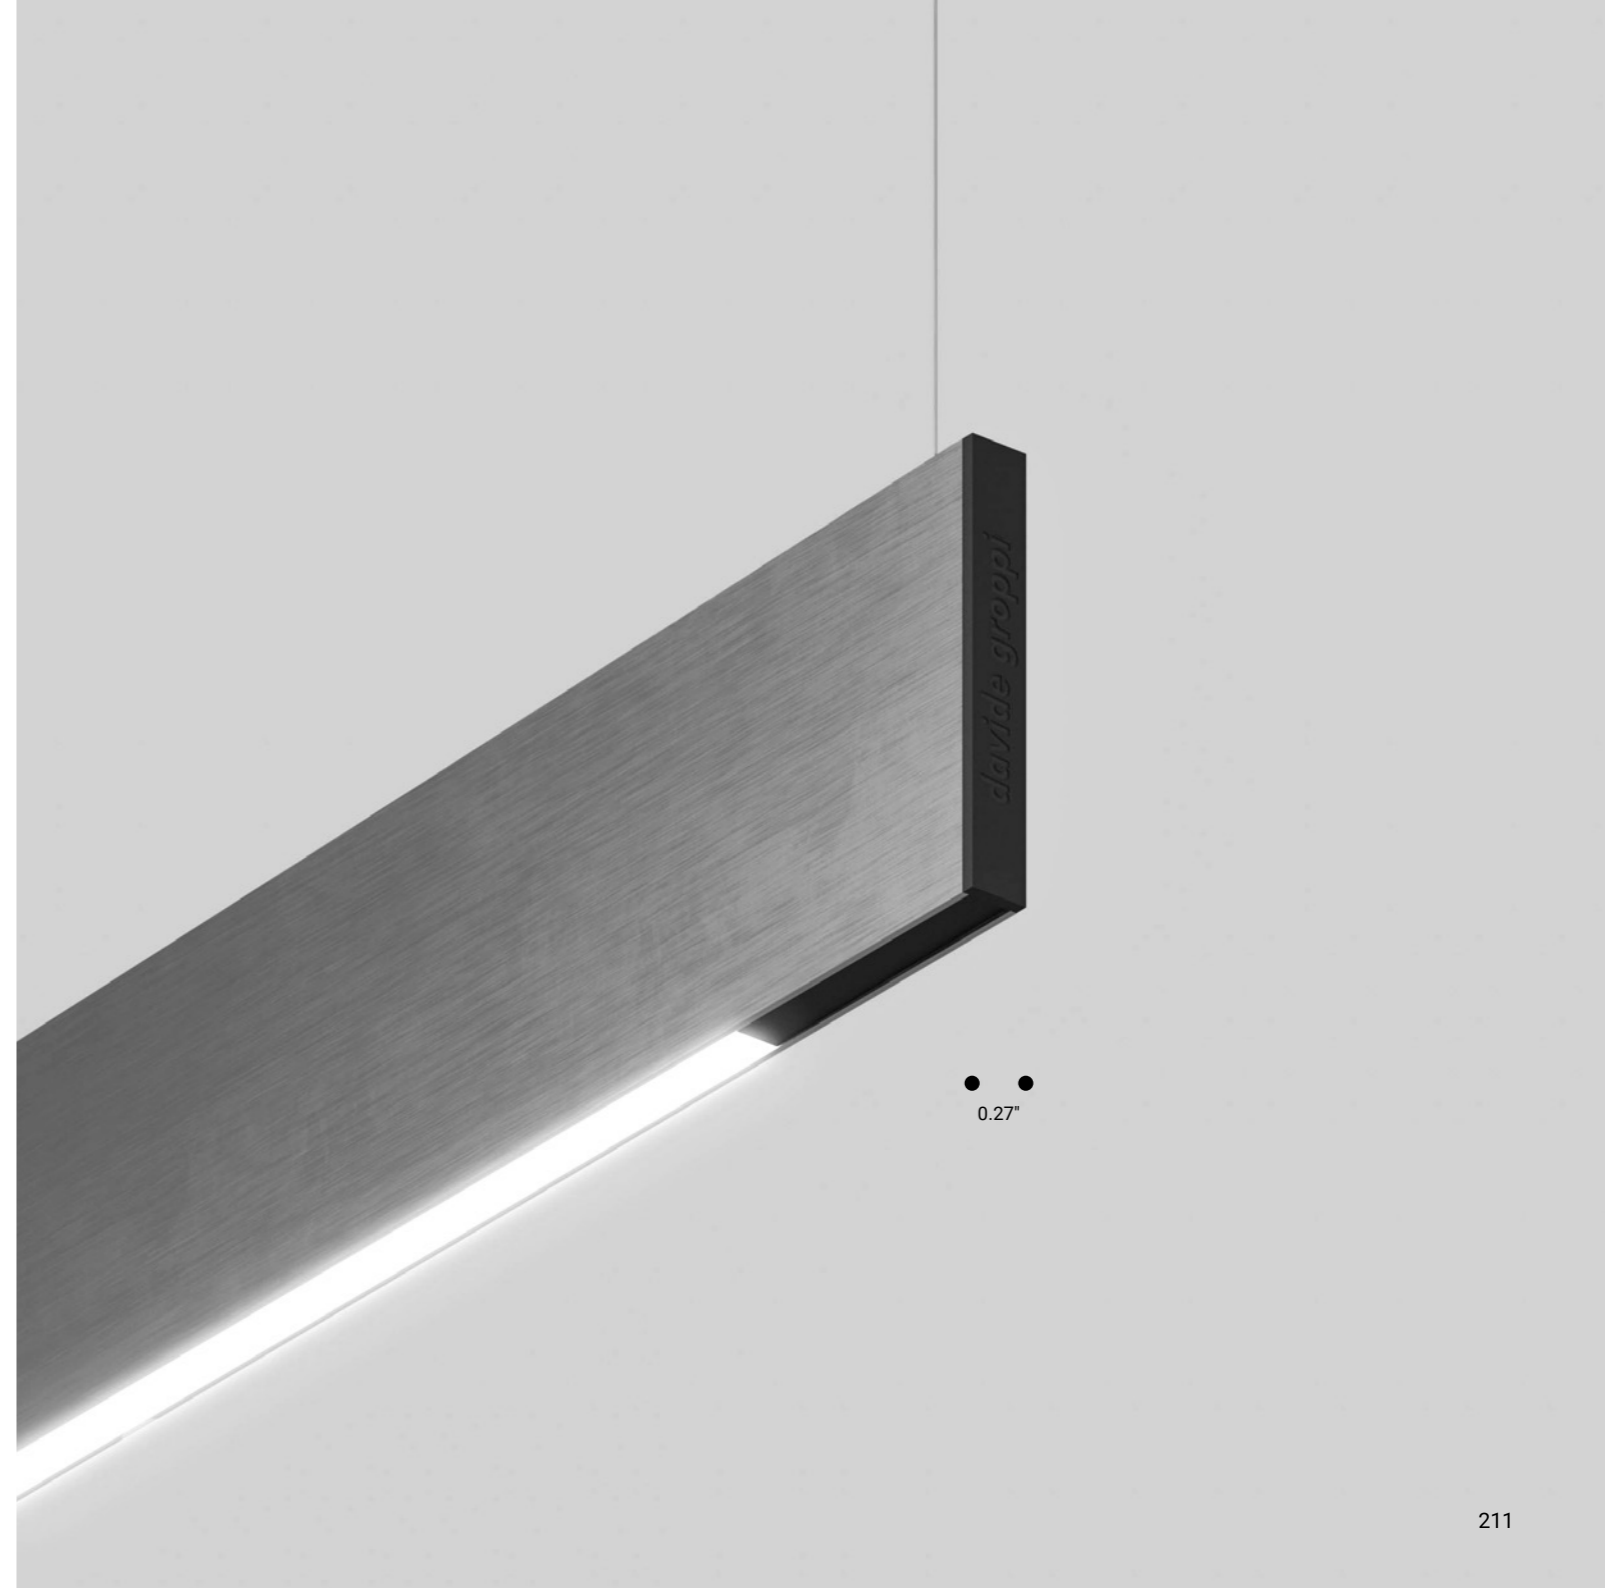

# SOTTOSOPRA

Daide Groppi / 2023




The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.  
Sottosopra: pure, elegant, wonderfully efficient.

Suspension / Direct-Indirect / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose.




**SOTTOSOPRA 1**

Ceiling driver version  
 24W  
 120V - 60Hz  
 2700K - Down 228lm - Up 1827lm /  
 3000K - Down 245lm - Up 1876lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 TRIAC/IGBT



Matt White - 2700K - TRIAC/IGBT  
 Matt White - 3000K - TRIAC/IGBT

1A4540303.27.02  
 1A4540303.30.02




**SOTTOSOPRA 1**

Ceiling driver version  
 24W  
 120V - 60Hz  
 2700K - Down 228lm - Up 1827lm /  
 3000K - Down 245lm - Up 1876lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 DALI - PUSH - 1-10V



Matt White - 2700K - DALI - PUSH - 1-10V  
 Matt White - 3000K - DALI - PUSH - 1-10V

1A4540303.27.07  
 1A4540303.30.07

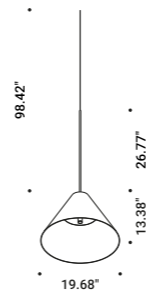

**SOTTOSOPRA 2**

Remote driver version  
 30W  
 Max 500mA DC  
 2700K - Down 228lm - Up 1827lm /  
 3000K - Down 245lm - Up 1876lm  
 CRI >90  
 UGR <19  
 Driver not included  
 2 Drivers required




Matt White - 2700K  
 Matt White - 3000K


1A4540303.27.20  
 1A4540303.30.20

**Compulsory accessories**


**Drivers**



<b>Driver</b>				Not included
110-240V	500mA/10W/IP20/TRIAC - 1-10V	SOTTOSOPRA 2	1Z2340010.500	




<b>Driver</b>				Not included
120-277V	500mA/30W/IP20/TRIAC - 1-10V	SOTTOSOPRA 2	1Z2020050.500	



<b>Driver</b>				Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	SOTTOSOPRA 2	1Z0241270.500	

**Optional accessories**

**Suspension kits**



<b>Recessed suspension kit for 0.49" plasterboard</b>				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SOTTOSOPRA 2	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	SOTTOSOPRA 2	1X0000400.05.00	

**WALL**

## DOT P

Omar Carraglia - Davide Groppi / 2015



A tool to light.


A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. Adjustable in all directions. DOT P 51: white wall back plate. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




**DOT P**

13W  
 120V - 60Hz  
 2700K / 3000K  
 CRI >97  
 Driver integrated  
 1-10V

Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Matt Black - 2700K - 1-10V  
 Matt Black - 3000K - 1-10V

1A2340303.27.03  
 1A2340303.30.03  
 1A2340403.27.03  
 1A2340403.30.03




**DOT P 51**

Max 10W - GU10  
 120V - 60Hz  
 ON/OFF  
 Bulb not included



Matt White - ON/OFF  
 Matt Black - ON/OFF

1A2490303.00.00  
 1A2490403.00.00




**DOT P ENDLESS**

ENDLESS version only  
 13W - 0,34A  
 48V DC  
 2700K / 3000K  
 CRI >97  
 Driver not included  
 See page ENDLESS



Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K

1A2340303.27.40  
 1A2340303.30.40  
 1A2340403.27.40  
 1A2340403.30.40



**DOT P ENDLESS CASAMBI**

ENDLESS version only  
 15,5W - 0,4A  
 48V DC  
 2700K / 3000K  
 CRI >97  
 Driver not included  
 See page ENDLESS



Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K

1A2340303.27.41  
 1A2340303.30.41  
 1A2340403.27.41  
 1A2340403.30.41

Compulsory accessories

Other accessories




Lens			Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		

Optional accessories


Other accessories



Accessory holder + Honeycomb louvre		Not included
	DOT P / DOT P ENDLESS / 1X0080400.01.00	
	DOT P ENDLESS CASAMBI	



Elliptical filter		Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / 1X0080000.02.00
		DOT P ENDLESS CASAMBI



Blue filter		Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / 1X0080000.03.00
		DOT P ENDLESS CASAMBI



Red filter		Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / 1X0080000.04.00
		DOT P ENDLESS CASAMBI



Yellow filter		Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / 1X0080000.05.00
		DOT P ENDLESS CASAMBI



## EDISON'S NIGHTMARE

Harry Thaler / 2014



A gestural project, full of irony and nostalgia.

Therefore, among a thousand stories, prohibitions, absurd technical rules,  
we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb\*,  
a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

*\* From 01 September 2012, incandescent bulbs cannot be sold in the EU.*


# EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

**Material** Blown glass - Metal  
**Finish** .00 Standard

**Note** Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable.

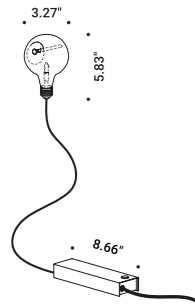

## EDISON'S NIGHTMARE

Max 10W - G4 - 12V  
120V - 60Hz  
Driver integrated  
Dimmer on board  
Bulb included

Standard - Dimmer on board

| 1A3380003.00.06 |





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind,  
pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal:  
it can be an image, a logo, a sentence, anything you want to represent, at any time.

The light message is punctuated by a blinking LED, offering reading in movement.


# FILM

Alessandra Dallagiovanna - Davide Groppi / 2010

Objects-Wall / Diffuse / Indoor

**Material** Metal - Polycarbonate  
**Finish** .00 Standard

**Note** Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable.

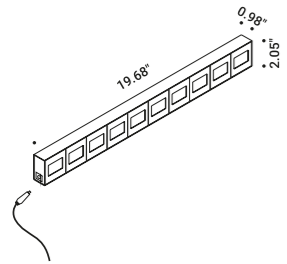


**FILM**  
 3W  
 5V DC  
 Driver not included  
 ON/OFF

Standard - ON/OFF


| 1A3410003.00.00 |

## Compulsory accessories

Drivers



<b>Driver with plug</b>		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180



<b>Driver</b>		Not included
100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180





## FOIL

967 DESIGN / 2011

An architectural lamp for wall and ceiling installation. Although it's there, you can't see the thickness. A luminaire that amazes with skill, so you only notice its two-dimensional effect.


# FOIL

967 DESIGN / 2011

Wall / Indirect / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire.




## FOIL

Max 160W - R7s  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF  
Matt Black - ON/OFF

1A3340303.00.00  
1A3340403.00.00

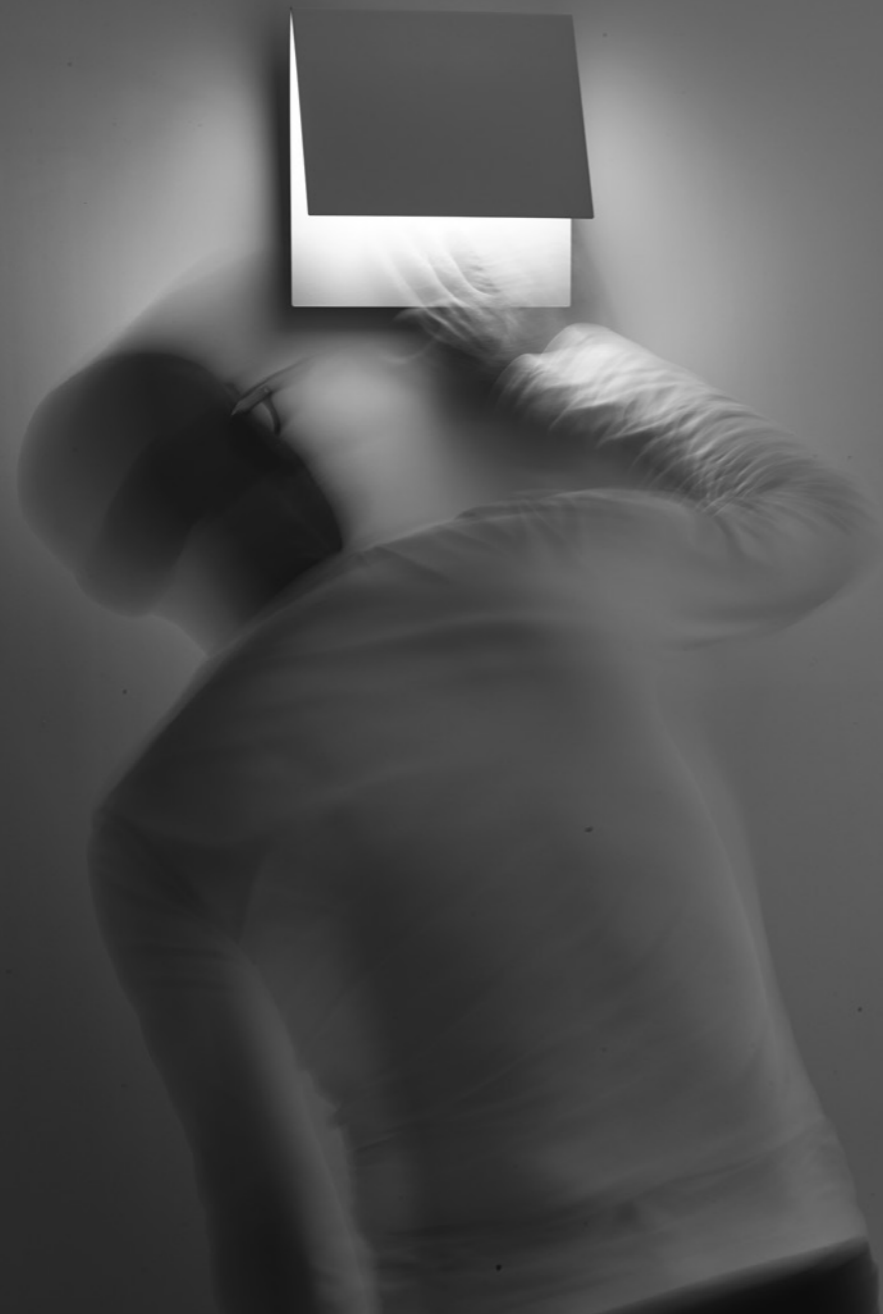

An indirect wall light project.  
The light source remains invisible while the light comes out soft from the metal diffuser,  
creating a delicate atmosphere.


## FOLDER

967 DESIGN / 2013

Wall / Indirect / Indoor

Material Metal  
Finish .03 Matt White

Note Wall luminaire.



### FOLDER

20W

120V - 60Hz

2700K - 397lm / 3000K - 415lm

CRI >80

Driver integrated

1-10V

Matt White - 2700K - 1-10V

Matt White - 3000K - 1-10V

1A3350303.27.03

1A3350303.30.03





# MIRA

Omar Carraglia / 2012




Lamp with a simple and essential shape.  
For interiors and adjustable.  
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor


**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. Adjustable in all directions. MIRA ENDLESS and MIRA ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




**MIRA**  
 7,5W  
 120V - 60Hz  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver integrated  
 1-10V

Matt White - 2700K - 1-10V	1A2280303.27.03
Matt White - 3000K - 1-10V	1A2280303.30.03
Matt Black - 2700K - 1-10V	1A2280403.27.03
Matt Black - 3000K - 1-10V	1A2280403.30.03




**MIRA SWITCH**  
 7,5W  
 120V - 60Hz  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver integrated  
 ON/OFF

Matt White - 2700K - ON/OFF	1A2280303.27.00
Matt White - 3000K - ON/OFF	1A2280303.30.00
Matt Black - 2700K - ON/OFF	1A2280403.27.00
Matt Black - 3000K - ON/OFF	1A2280403.30.00




**MIRA ENDLESS**  
 ENDLESS version only  
 6W - 0,16A  
 48V DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included  
 See page ENDLESS

Matt White - 2700K	1A2280303.27.40
Matt White - 3000K	1A2280303.30.40
Matt Black - 2700K	1A2280403.27.40
Matt Black - 3000K	1A2280403.30.40



**MIRA**  
 7,5W  
 120V - 60Hz  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver integrated  
 DALI

Matt White - 2700K - DALI	1A2280303.27.01
Matt White - 3000K - DALI	1A2280303.30.01
Matt Black - 2700K - DALI	1A2280403.27.01
Matt Black - 3000K - DALI	1A2280403.30.01



**MIRA ENDLESS CASAMBI**  
 ENDLESS version only  
 8,5W - 0,22A  
 48V DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included  
 See page ENDLESS

Matt White - 2700K	1A2280303.27.41
Matt White - 3000K	1A2280303.30.41
Matt Black - 2700K	1A2280403.27.41
Matt Black - 3000K	1A2280403.30.41



## MIRA MAGNETIC

Omar Carraglia / 2015

Lamp with a simple and essential shape.  
For interiors and adjustable, it is designed with a magnetic application system  
to be even more versatile and functional.


# MIRA MAGNETIC

Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable.



## MIRA MAGNETIC


5,6W  
 Max 500mA DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K


1A3680303.27.20  
 1A3680303.30.20  
 1A3680403.27.20  
 1A3680403.30.20

## Compulsory accessories

Drivers



Driver with plug		Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180303.00.06
Matt Black	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180403.00.06



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



## MORSETTO P

Daide Groppi / 2019



A lamp that can be positioned, balanced and turned,  
but overall it produces a beautiful light on the table.  
It's the wall version of the Morsetto lamp.  
Three adjustable arms allow the light source to be positioned  
far from where the lamp is attached.  
Table version also available.


# MORSETTO P

Davide Groppi / 2019

Wall / Direct / Indoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Wall luminaire. Adjustable in all directions. Dimmer on the cable. Black cable.

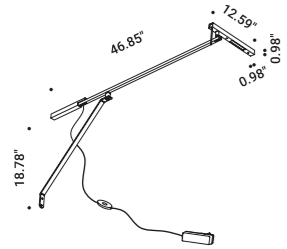

## MORSETTO P

13W  
 24V DC  
 2700K - 700lm / 3000K - 753lm  
 CRI >90  
 UGR <19  
 Dimmer on board  
 Driver with plug included




Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2570403.27.06  
 1A2570403.30.06

## Optional accessories

Drivers



### Driver with plug

Matt Black Input 110-240V - 50/60Hz  
 Output 24V DC - 18W - IP20

1Z0431020

Included



# OZEN

Daide Groppi / 1999



A tool to light.

The luminaire is pure form, a simple container for the light source.


# OZEN

Davide Groppi / 1999

Wall / Diffuse / Indoor

**Material** Metal  
**Finish** .01 Polished Chrome .03 Matt White .14 Brushed Chrome

**Note** Wall luminaire. White wall back plate.



## OZEN

Max 60W - G9

120V - 60Hz

ON/OFF

Bulb not included



Polished Chrome - ON/OFF

Matt White - ON/OFF

Brushed Chrome - ON/OFF

1A3960103.00.00

1A3960303.00.00

1A3961403.00.00



**OZEN VETRO**

Daide Groppi / 1999



A tool to light.  
The luminaire is pure form, a simple container for the light source.


# OZEN VETRO

Davide Groppi / 1999

Wall / Diffuse / Indoor

**Material** Glass - Metal  
**Finish** .00 Standard

**Note** Wall luminaire. White wall back plate.



## OZEN VETRO

Max 48W - G9

120V - 60Hz

ON/OFF

Bulb not included



Standard - ON/OFF

| 1A3970003.00.00 |



**PIÙ**

Davide Groppi / 2007

A tool to light.  
Pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# PIÙ


Davide Groppi / 2007

Wall / Indirect / Indoor

Material Metal

Finish .03 Matt White

Note Wall luminaire. Dual emission.



## PIÙ

Max 120W - R7s

120V - 60Hz


ON/OFF


Bulb not included



Matt White - ON/OFF

1A3370303.00.00

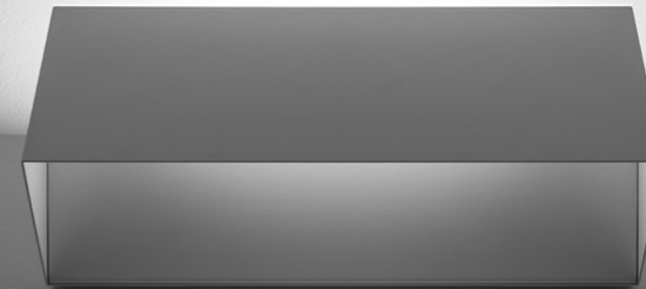

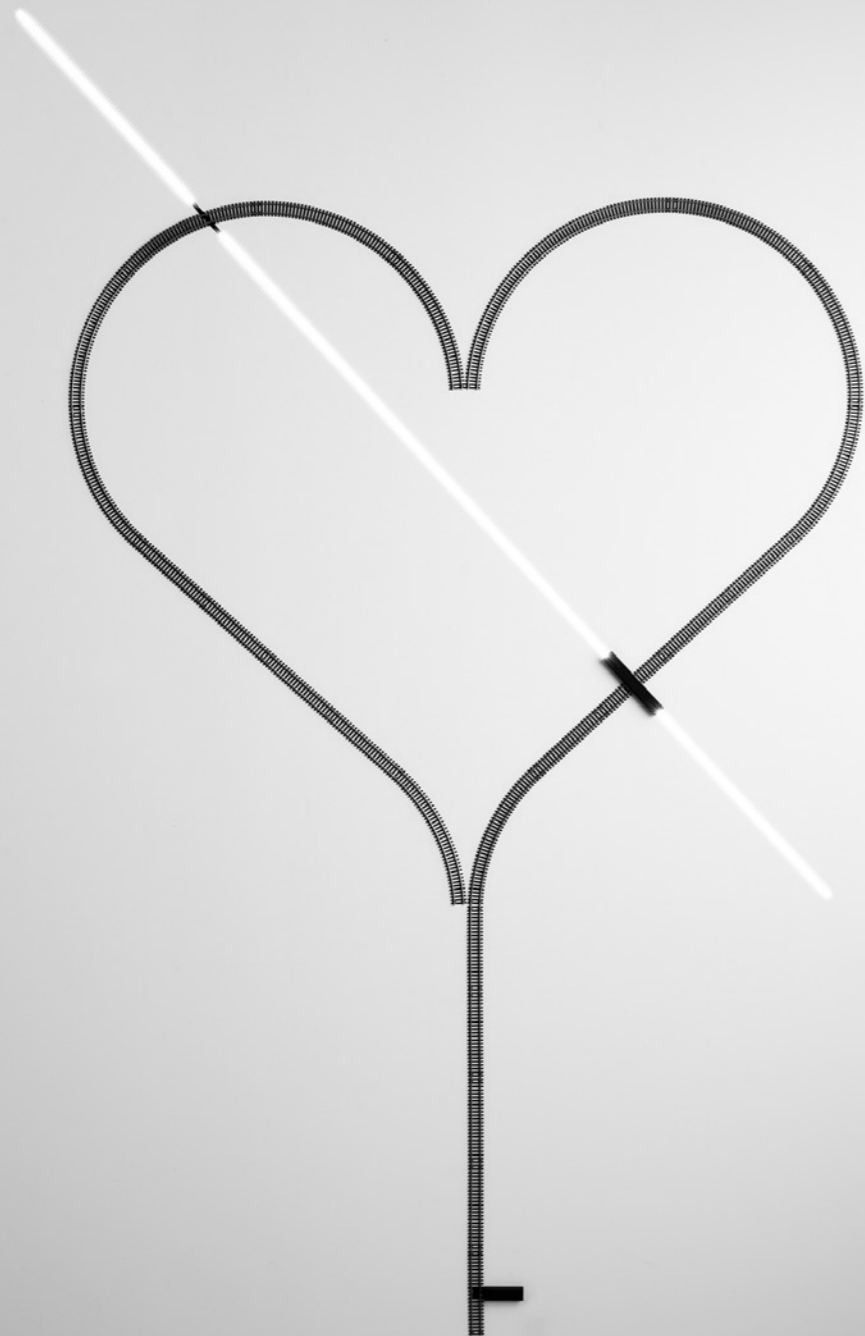

A ready-made project to design the space with a sense of irony and weightlessness. The tracks of an electric train can be used to draw a heart, but also to conduct electricity. Rail is the boundary between usefulness and show, between art and design.


# RAIL

Davide Groppi / 2019

Wall / Direct / Indoor

Material ABS - Metal  
Finish .00 Standard


Note Wall luminaire. Matt black modular tracks. Dimmer on the cable. Black cable.

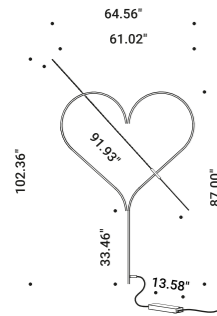

**RAIL**  
22W  
24V DC  
3000K - 2000lm  
CRI >90  
Driver included  
Dimmer on board

Standard - 3000K - Dimmer on board

| 1A3400003.30.06 |

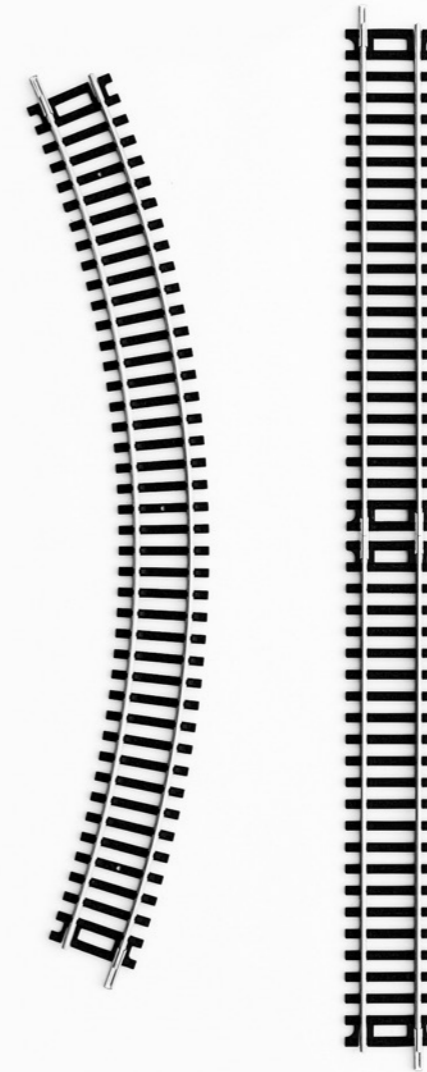



## REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.  
Reflex is designed to be powered by ENDLESS system.


# REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

**Material** Metal - Mirror  
**Finish** .04 Matt Black

**Note** Wall luminaire. Plane with mirror finish. Matt black rear plane.  
Luminaire designed to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



## REFLEX

23W - 0,57A

48V DC

2700K - 2158lm / 3000K - 2320lm

CRI >90

Driver not included




Matt Black - 2700K

Matt Black - 3000K

1A0850403.27.20

1A0850403.30.20



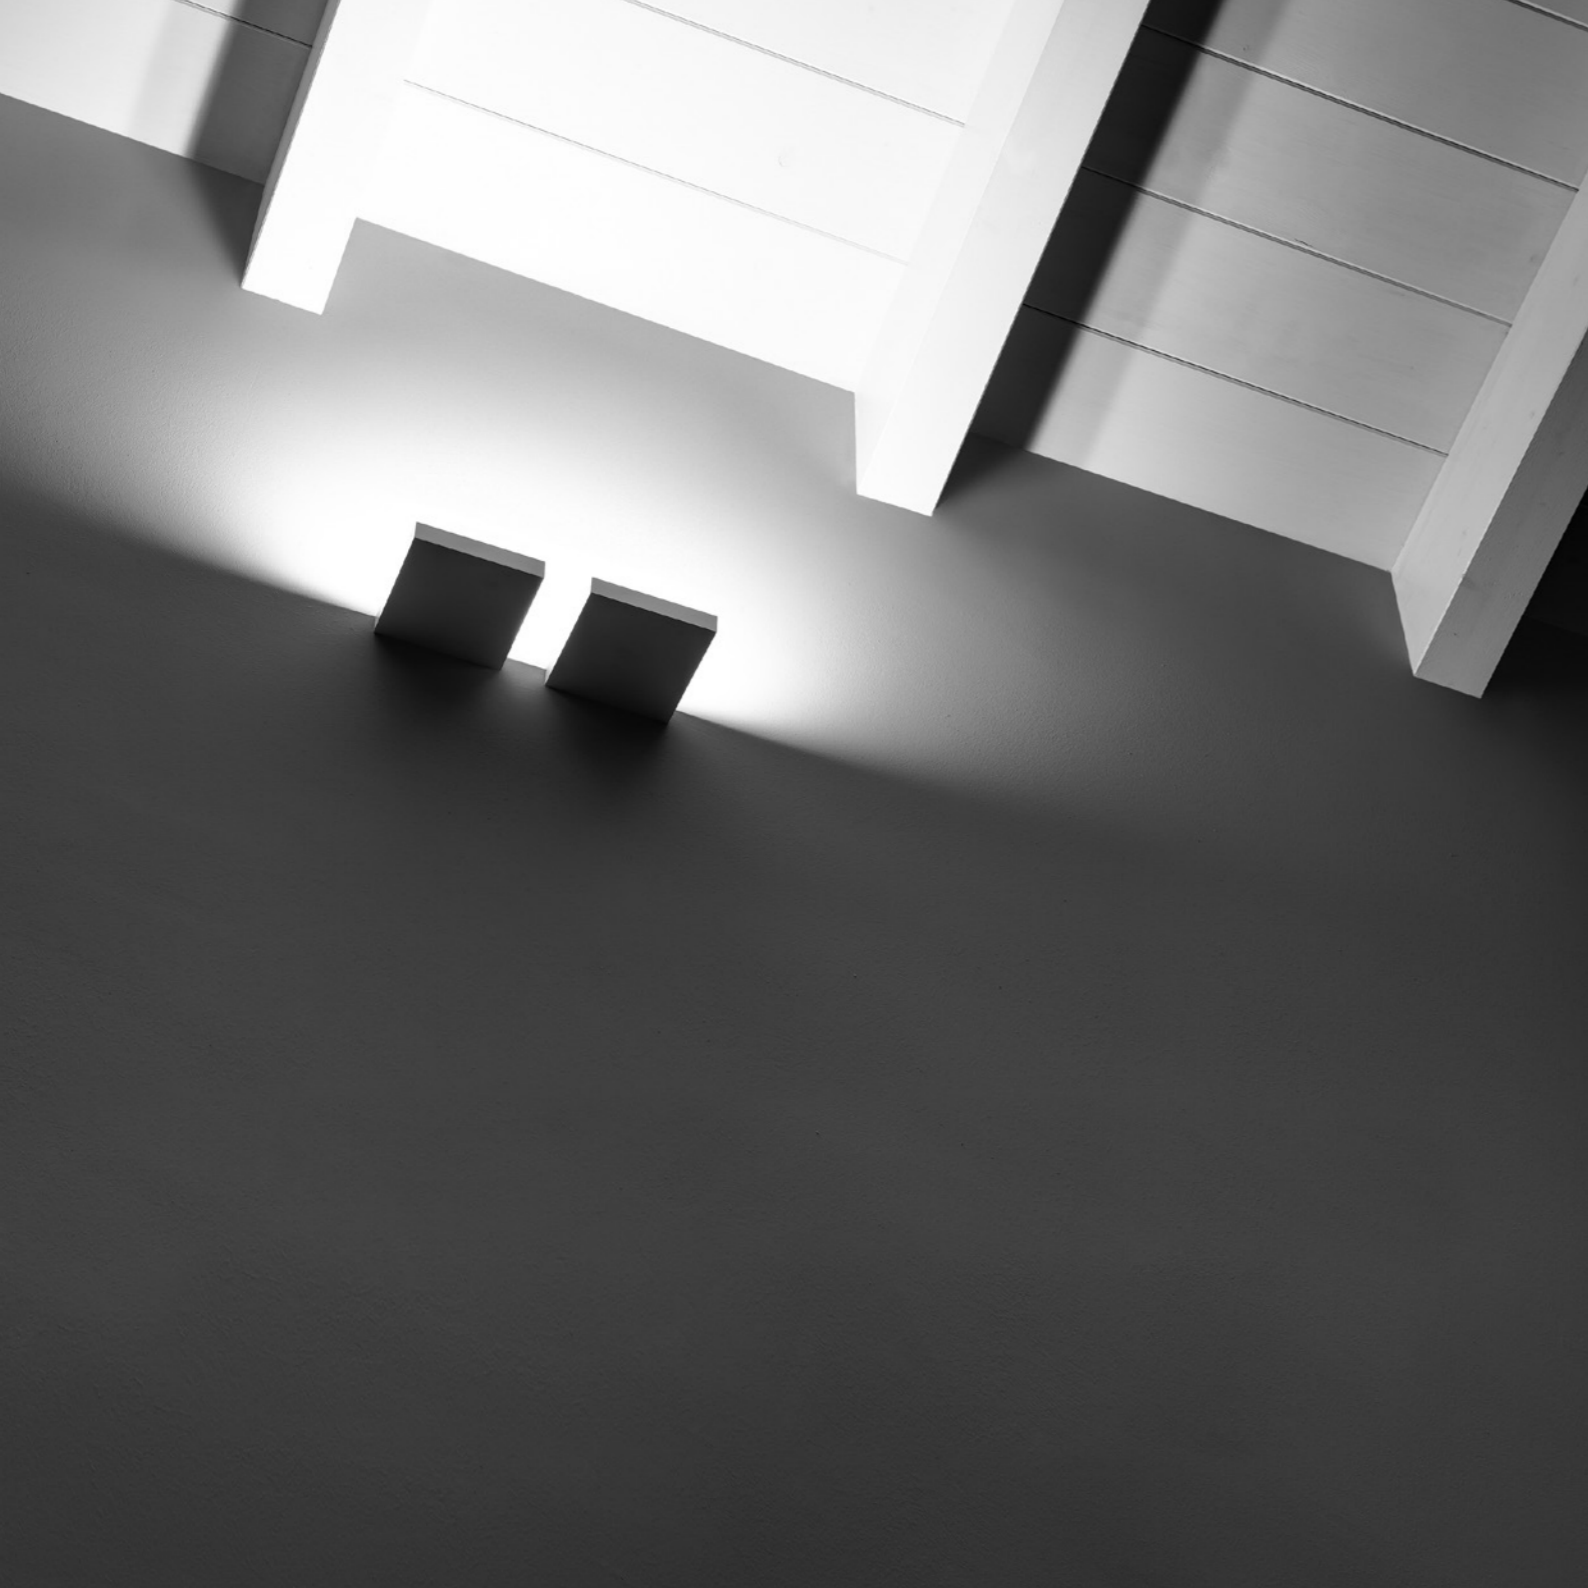

## SOL 1

Omar Carraglia - Davide Groppi / 2003

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


# SOL 1

Omar Carraglia - Davide Groppi / 2003

Wall / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Wall luminaire.



## SOL 1

Max 150W - R7s  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF  
Matt Black - ON/OFF

1A3320303.00.00  
1A3320403.00.00





A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


## SOL 2

/ 2008

Wall / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Wall luminaire.



### SOL 2

Max 200W - R7s  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF  
Matt Black - ON/OFF

1A3330303.00.00  
1A3330403.00.00






A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.  
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black


**Note** Wall luminaire. Adjustable in all directions. SPOT ENDLESS and SPOT ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



**SPOT ENDLESS CASAMBI**  
 ENDLESS version only  
 Max 15,5W - 0,4A  
 48V DC  
 CRI >90  
 Driver not included  
 See page ENDLESS  
 LED module not included

Matt White  
 Matt Black


1A1080303.00.41  
 1A1080403.00.41



**SPOT**  
 Max 17W  
 120V - 60Hz  
 CRI >90  
 Driver integrated  
 1-10V  
 LED module not included

Matt White - 1-10V  
 Matt Black - 1-10V

1A1080303.00.03  
 1A1080403.00.03



**SPOT ENDLESS**  
 ENDLESS version only  
 Max 13W - 0,34A  
 48V DC  
 CRI >90  
 Driver not included  
 See page ENDLESS  
 LED module not included

Matt White  
 Matt Black

1A1080303.00.40  
 1A1080403.00.40



Compulsory accessories


LED modules




<b>DG111 LED Module</b>	Not included		
13,5W - 15° - 400mA DC 2700K - 1318lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A4700003.27.20	
13,5W - 15° - 400mA DC 3000K - 1345lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A4700003.30.20	




<b>DG111 LED module</b>	Not included		
13,5W - 22° - 400mA DC 2700K - 1487lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3890003.27.20	
13,5W - 22° - 400mA DC 3000K - 1556lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3890003.30.20	




<b>DG111 LED module</b>	Not included		
13,5W - 36° - 400mA DC 2700K - 1446lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3900003.27.20	
13,5W - 36° - 400mA DC 3000K - 1512lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3900003.30.20	



<b>DG111 LED Module</b>	Not included		
11,7W - 15° - 350mA DC 2700K - 1068lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A4700000.27.20	
11,7W - 15° - 350mA DC 3000K - 1091lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A4700000.30.20	



<b>DG111 LED module</b>	Not included		
11,7W - 22° - 350mA DC 2700K - 1508lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3890000.27.20	
11,7W - 22° - 350mA DC 3000K - 1578lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3890000.30.20	




<b>DG111 LED module</b>	Not included		
11,7W - 36° - 350mA DC 2700K - 1266lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3900000.27.20	
11,7W - 36° - 350mA DC 3000K - 1323lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3900000.30.20	

Optional accessories


Other accessories




<b>Accessory holder + Soft filter + Honeycomb louvre</b>	Not included	
Matt Black	1X0070400.04.00	




<b>Accessory holder + Elliptical filter</b>	Not included	
Matt Black	1X0070400.05.00	




<b>Blue filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00




<b>Red filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00




<b>Yellow filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00




<b>Horizontal directional fins</b>	Not included	
Matt Black	1X0070400.01.00	



<b>Cylindrical screen</b>	Not included	
Matt Black	1X0070400.02.00	



<b>Cone 45°</b>	Not included	
Matt Black	1X0070400.03.00	





## TOAST

Daide Groppi - Alberto Zattin / 2001




The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

<b>Material</b>	Glass - Metal			
<b>Finish</b>	<b>.01</b> Polished Chrome	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.08</b> Brushed Brass
	<b>.14</b> Brushed Chrome			
<b>Note</b>	Wall luminaire. Dual emission.			




## TOAST

Max 100W - R7s  
120V - 60Hz  
ON/OFF  
Bulb not included



Polished Chrome - ON/OFF  
Matt White - ON/OFF  
Matt Black - ON/OFF  
Brushed Brass - ON/OFF  
Brushed Chrome - ON/OFF

1A3290103.00.00  
1A3290303.00.00  
1A3290403.00.00  
1A3290803.00.00  
1A3291403.00.00



## TOAST LED

12W  
120V - 60Hz  
2700K - 743lm / 3000K - 743lm  
CRI >90  
Driver integrated

ON/OFF



Polished Chrome - 2700K - ON/OFF  
Polished Chrome - 3000K - ON/OFF  
Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF  
Brushed Brass - 2700K - ON/OFF  
Brushed Brass - 3000K - ON/OFF  
Brushed Chrome - 2700K - ON/OFF  
Brushed Chrome - 3000K - ON/OFF

1A3280103.27.00  
1A3280103.30.00  
1A3280303.27.00  
1A3280303.30.00  
1A3280403.27.00  
1A3280403.30.00  
1A3280803.27.00  
1A3280803.30.00  
1A3281403.27.00  
1A3281403.30.00



**CEILING**



## ASINTOTO


Daide Groppi / 2023

Abstraction, purity, graphic sign.  
The projected reduction of Infinito.  
The disc appears enigmatic, the symbolic presence of the absence of light.

Ceiling / Indirect / Indoor

**Material** Metal - Methacrylate  
**Finish** .27 Gravity Black

**Note** Ceiling luminaire. Disc with gravity black finish. Magnetic weight available for disc tilting. Black cable.



**ASINTOTO**


18W  
 Max 500mA DC  
 2700K - 1435lm / 3000K - 1478lm  
 CRI >90  
 Driver not included

Gravity Black - 2700K  
 Gravity Black - 3000K

1A4072703.27.20  
 1A4072703.30.20

**Compulsory accessories**


Drivers



<b>Driver</b>			Not included
220-240V(100-127V)	500mA/26,5W(26,5W)/IP20/DALI - PUSH	1Z0240530.500	
	- 1-10V		

**Optional accessories**

Installation kits



<b>Circular plasterboard panel 0.49"</b>		Not included
Standard	Cut-out 15.75" x 15.75" Minimum space for mounting Ø 4.53"	1A4520000.00.00


Suspension kits



<b>Recessed suspension kit for 0.49" plasterboard</b>		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 1.73" Minimum space for mounting 2.76"	1X0000400.04.00



<b>Ceiling suspension kit</b>		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




<b>Wall adapter plate</b>		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories



<b>Magnetic weight</b>		Not included
Matt Black	For sloped installation	1A4710400.00.00

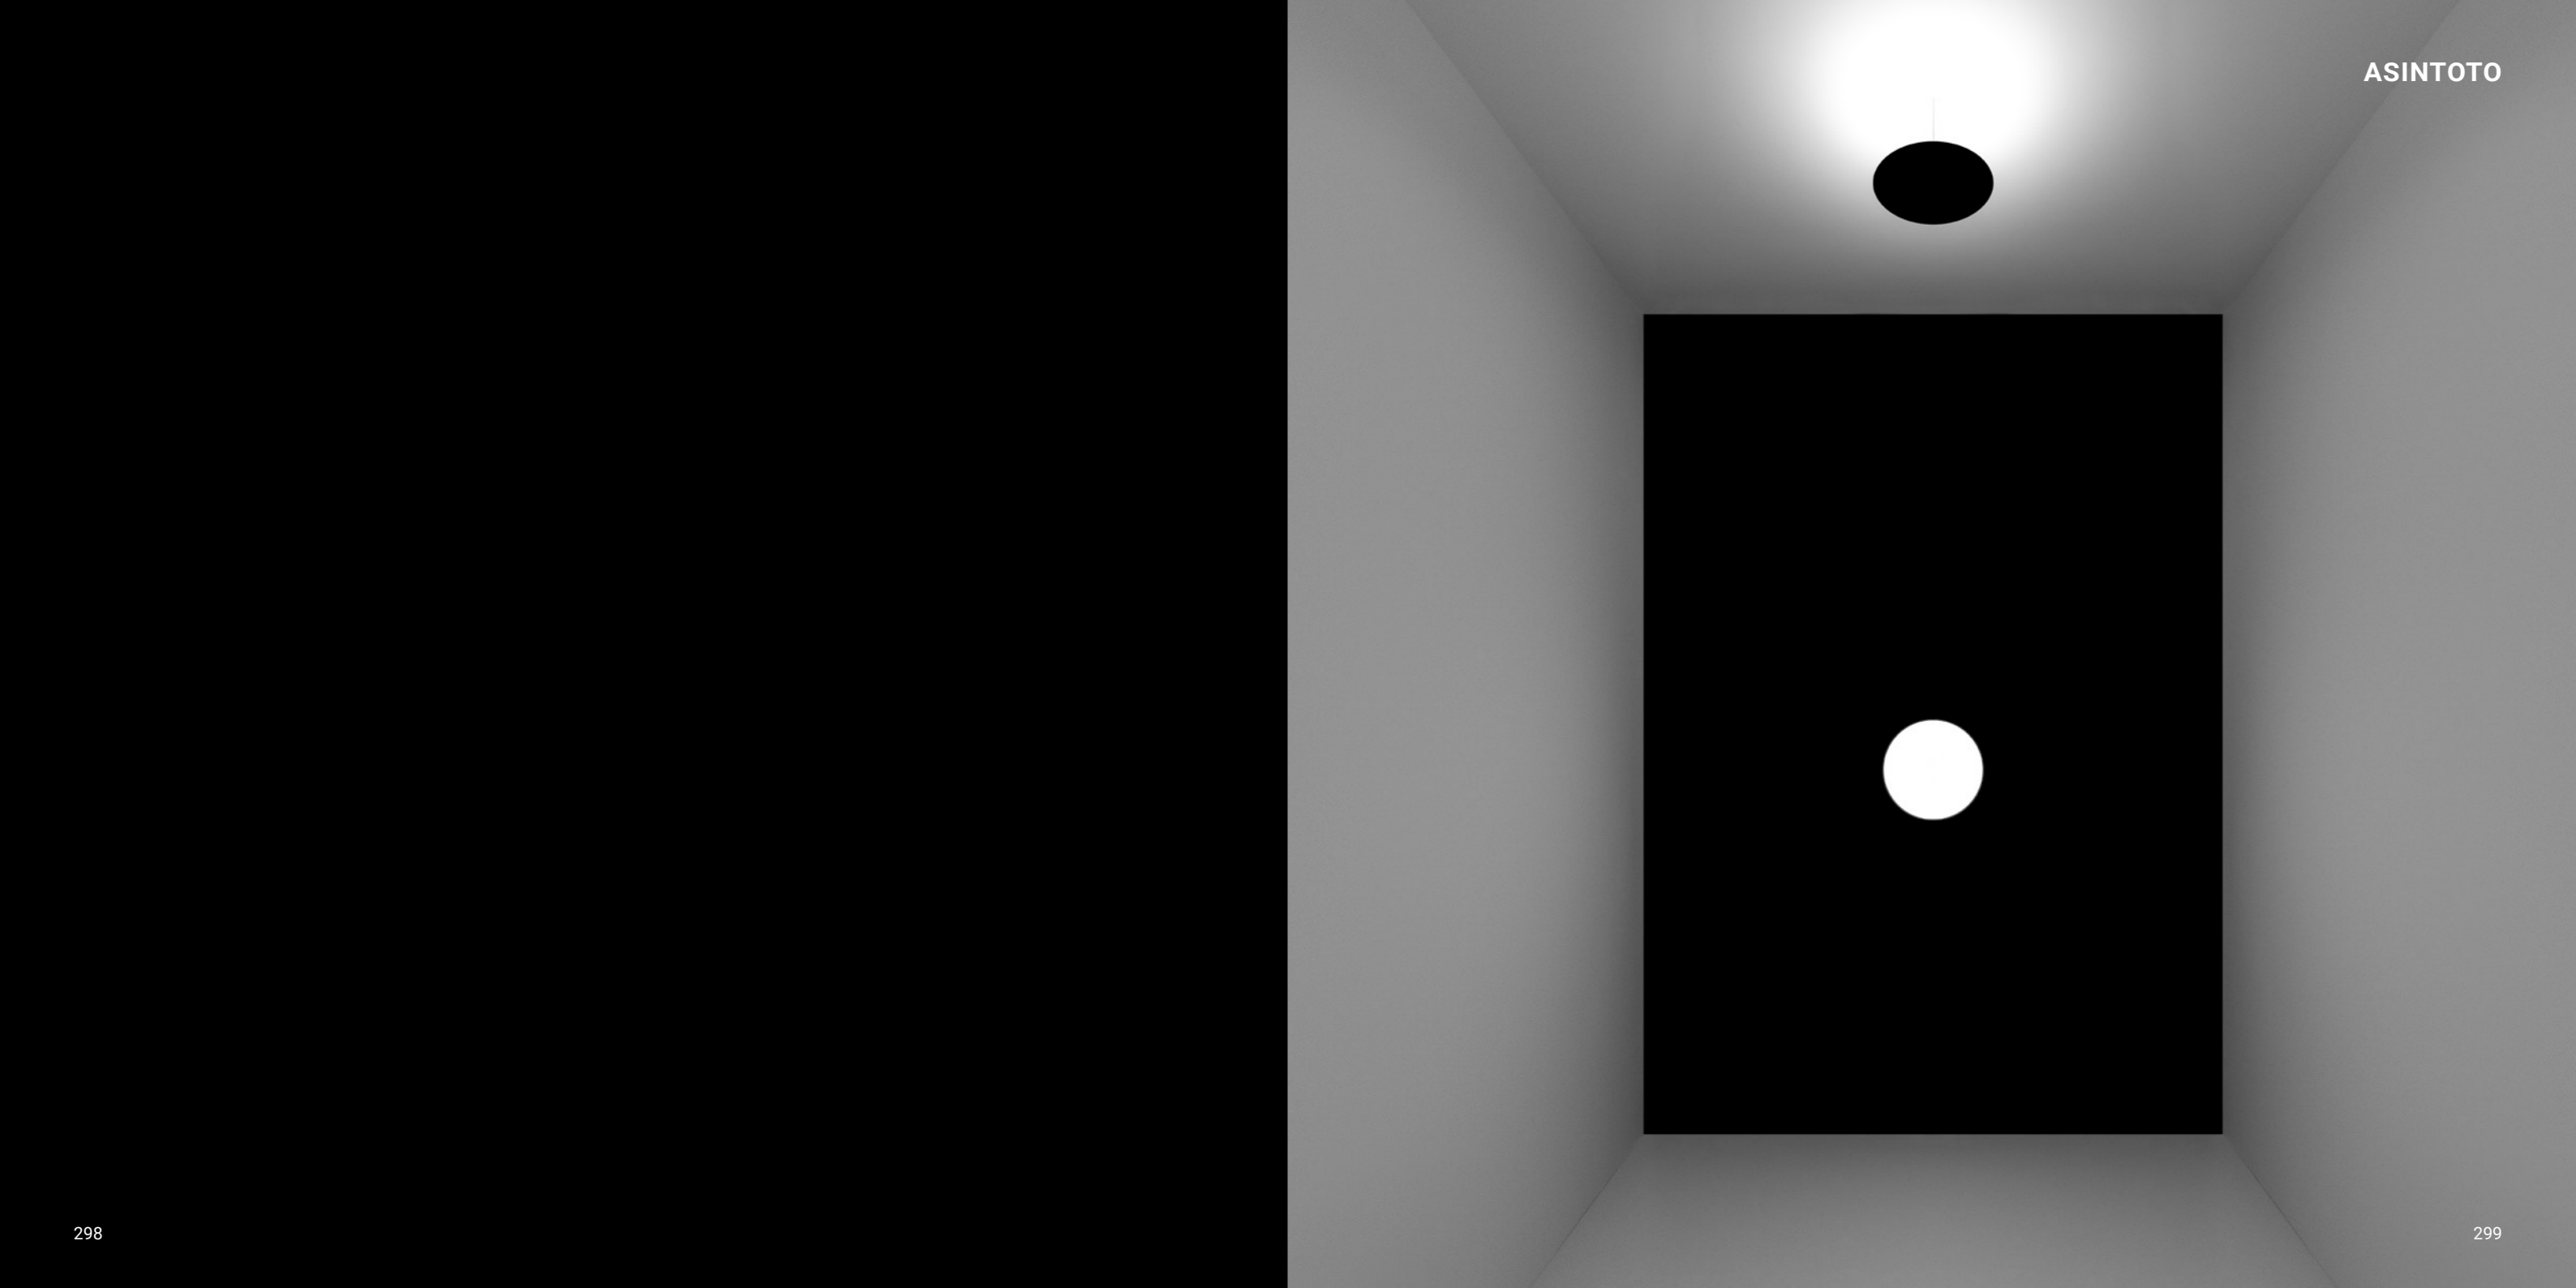

## DOT PL 51

Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED bulbs to offer superior performance and a wide range of light beams.

## DOT PL 51


Omar Carraglia - Davide Groppi / 2015

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White

Note Ceiling luminaire.



### DOT PL 51

Max 10W - GU10

120V - 60Hz

ON/OFF

Bulb not included




Matt White - ON/OFF

1A3800303.00.00





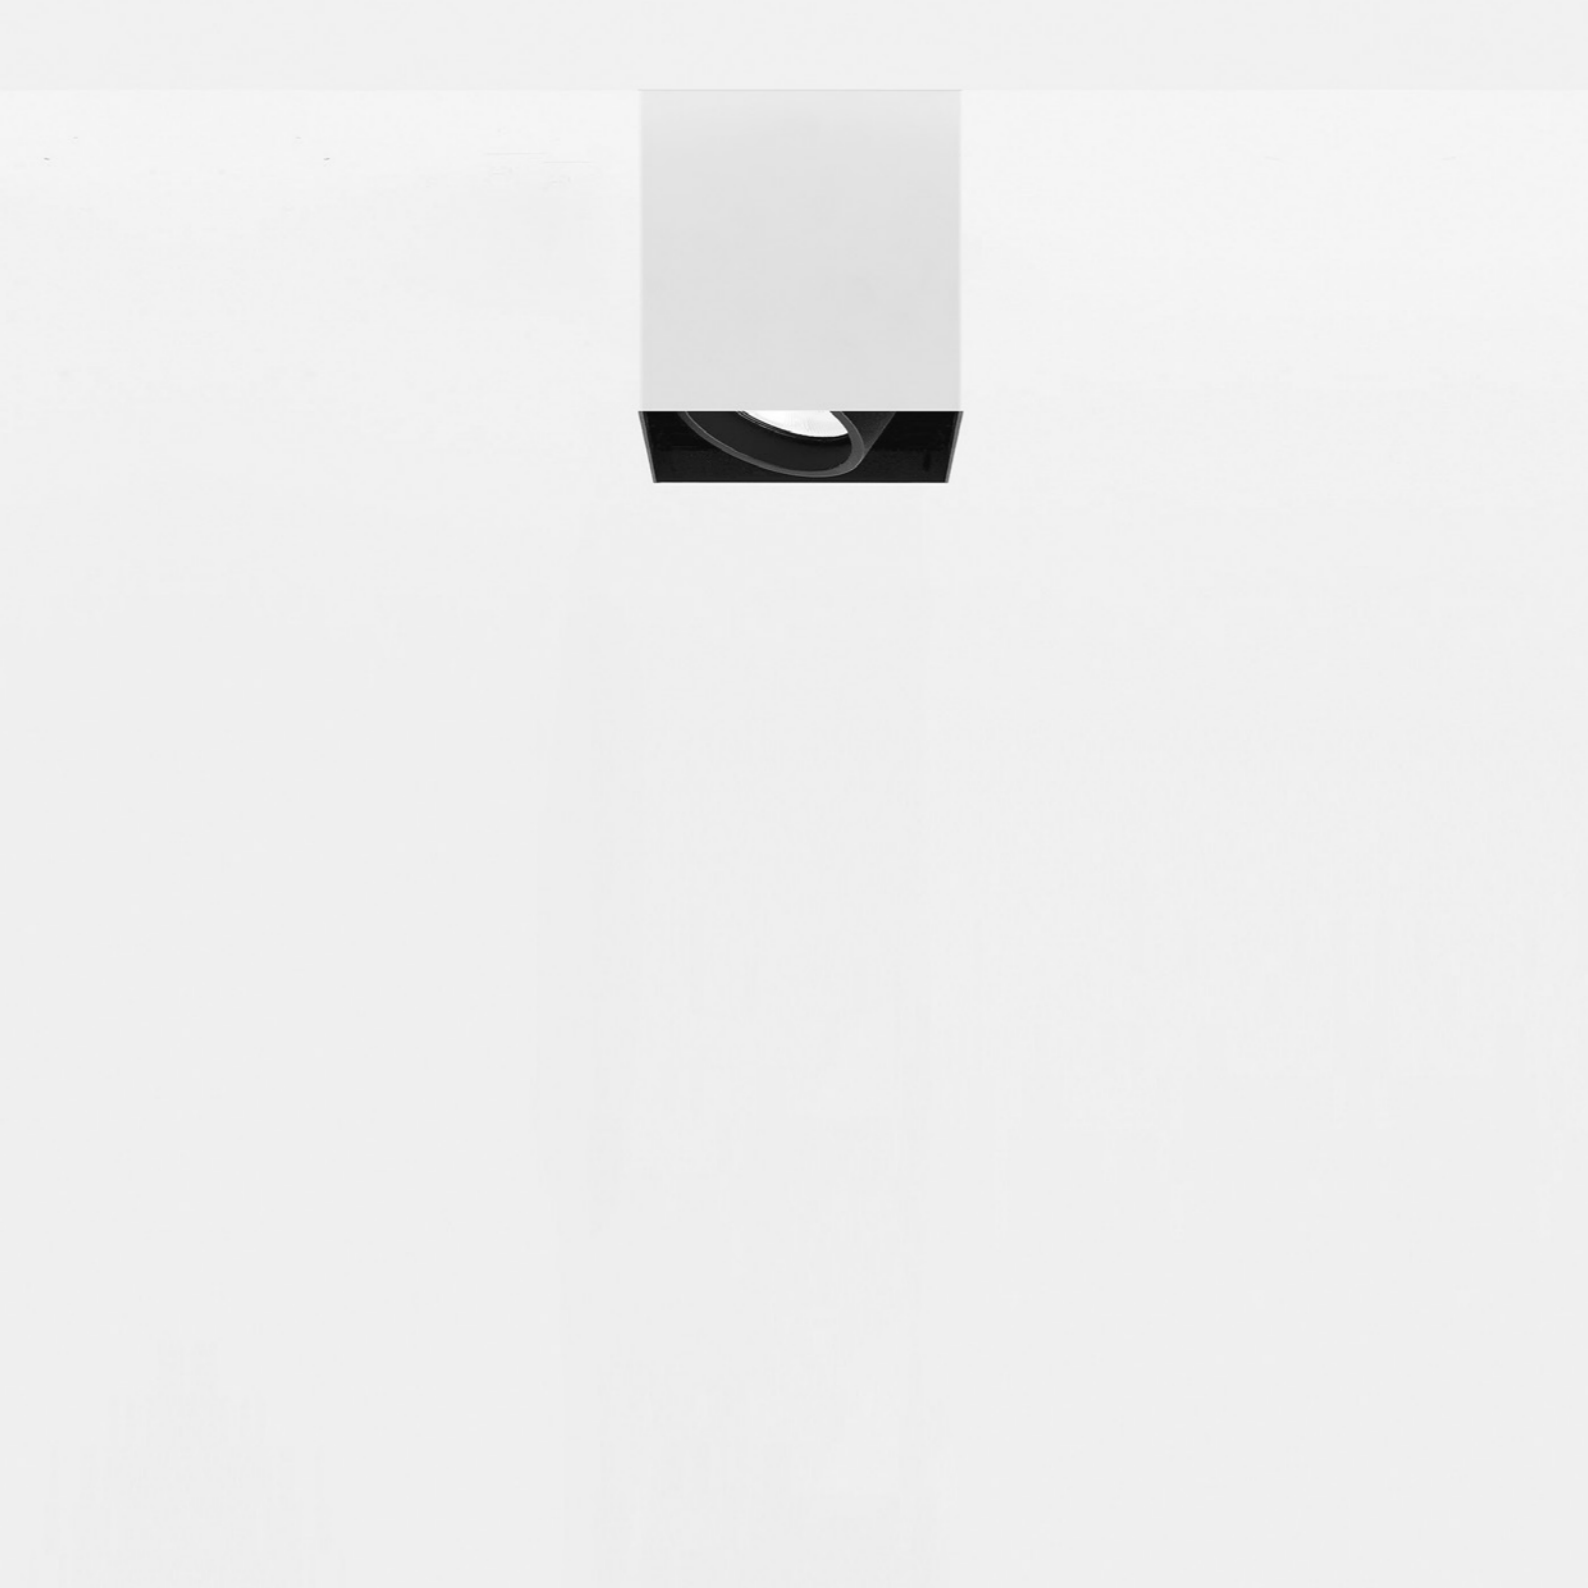

The luminaire is pure form, a simple container for the light source. Light is incorporated into the space, becoming an architectural element.


# MINI PL 51

/ 2016

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions.



## MINI PL 51

Max 10W - GU10

120V - 60Hz

ON/OFF

Bulb not included




Matt White - ON/OFF

1A3450303.00.00


Matt White/Black Bicolor - ON/OFF

1A3453403.00.00

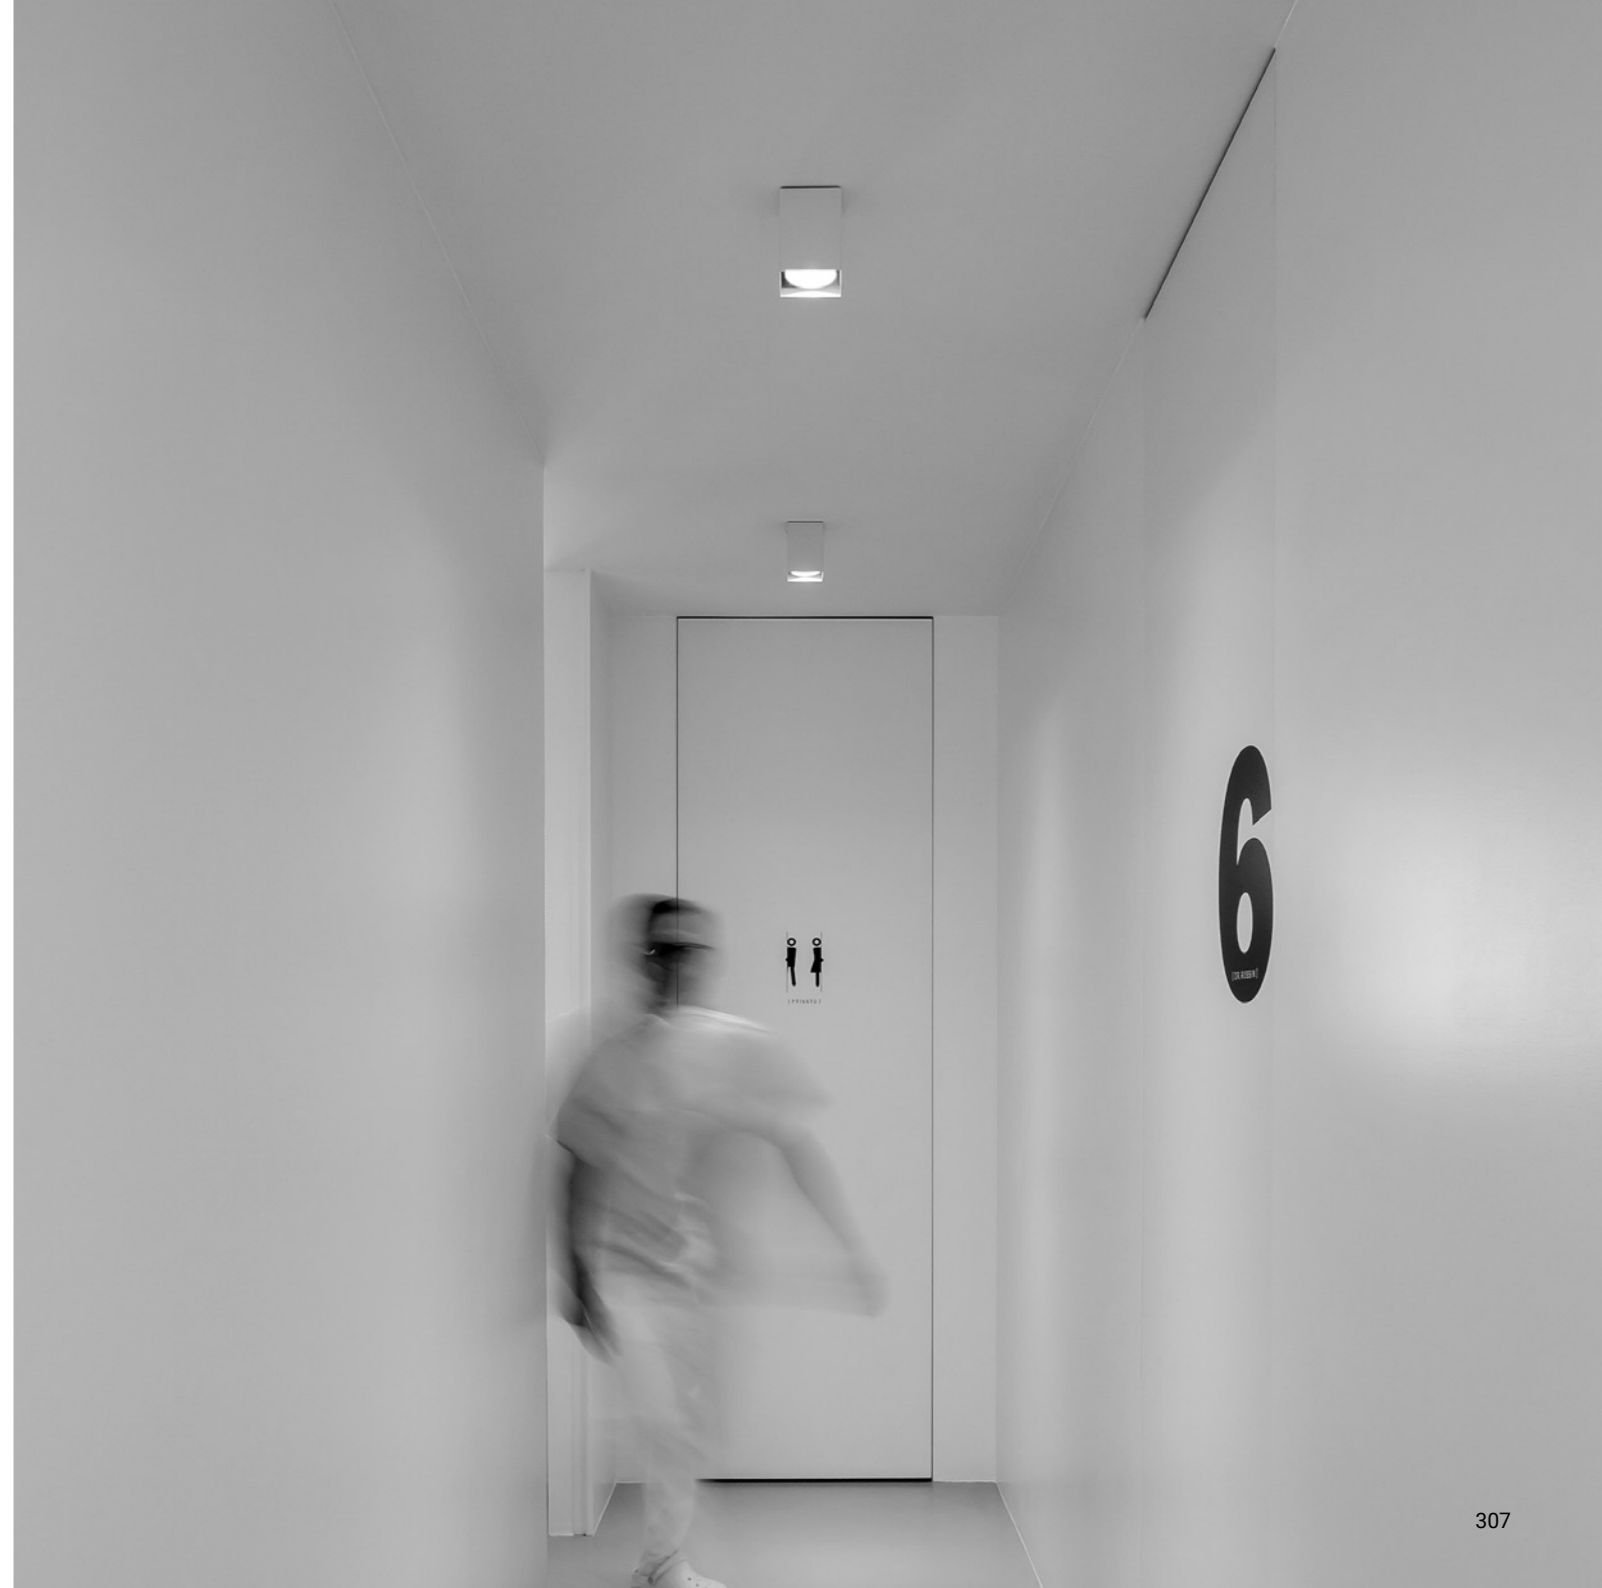

## **NULLA PL**

Daide Groppi / 2014

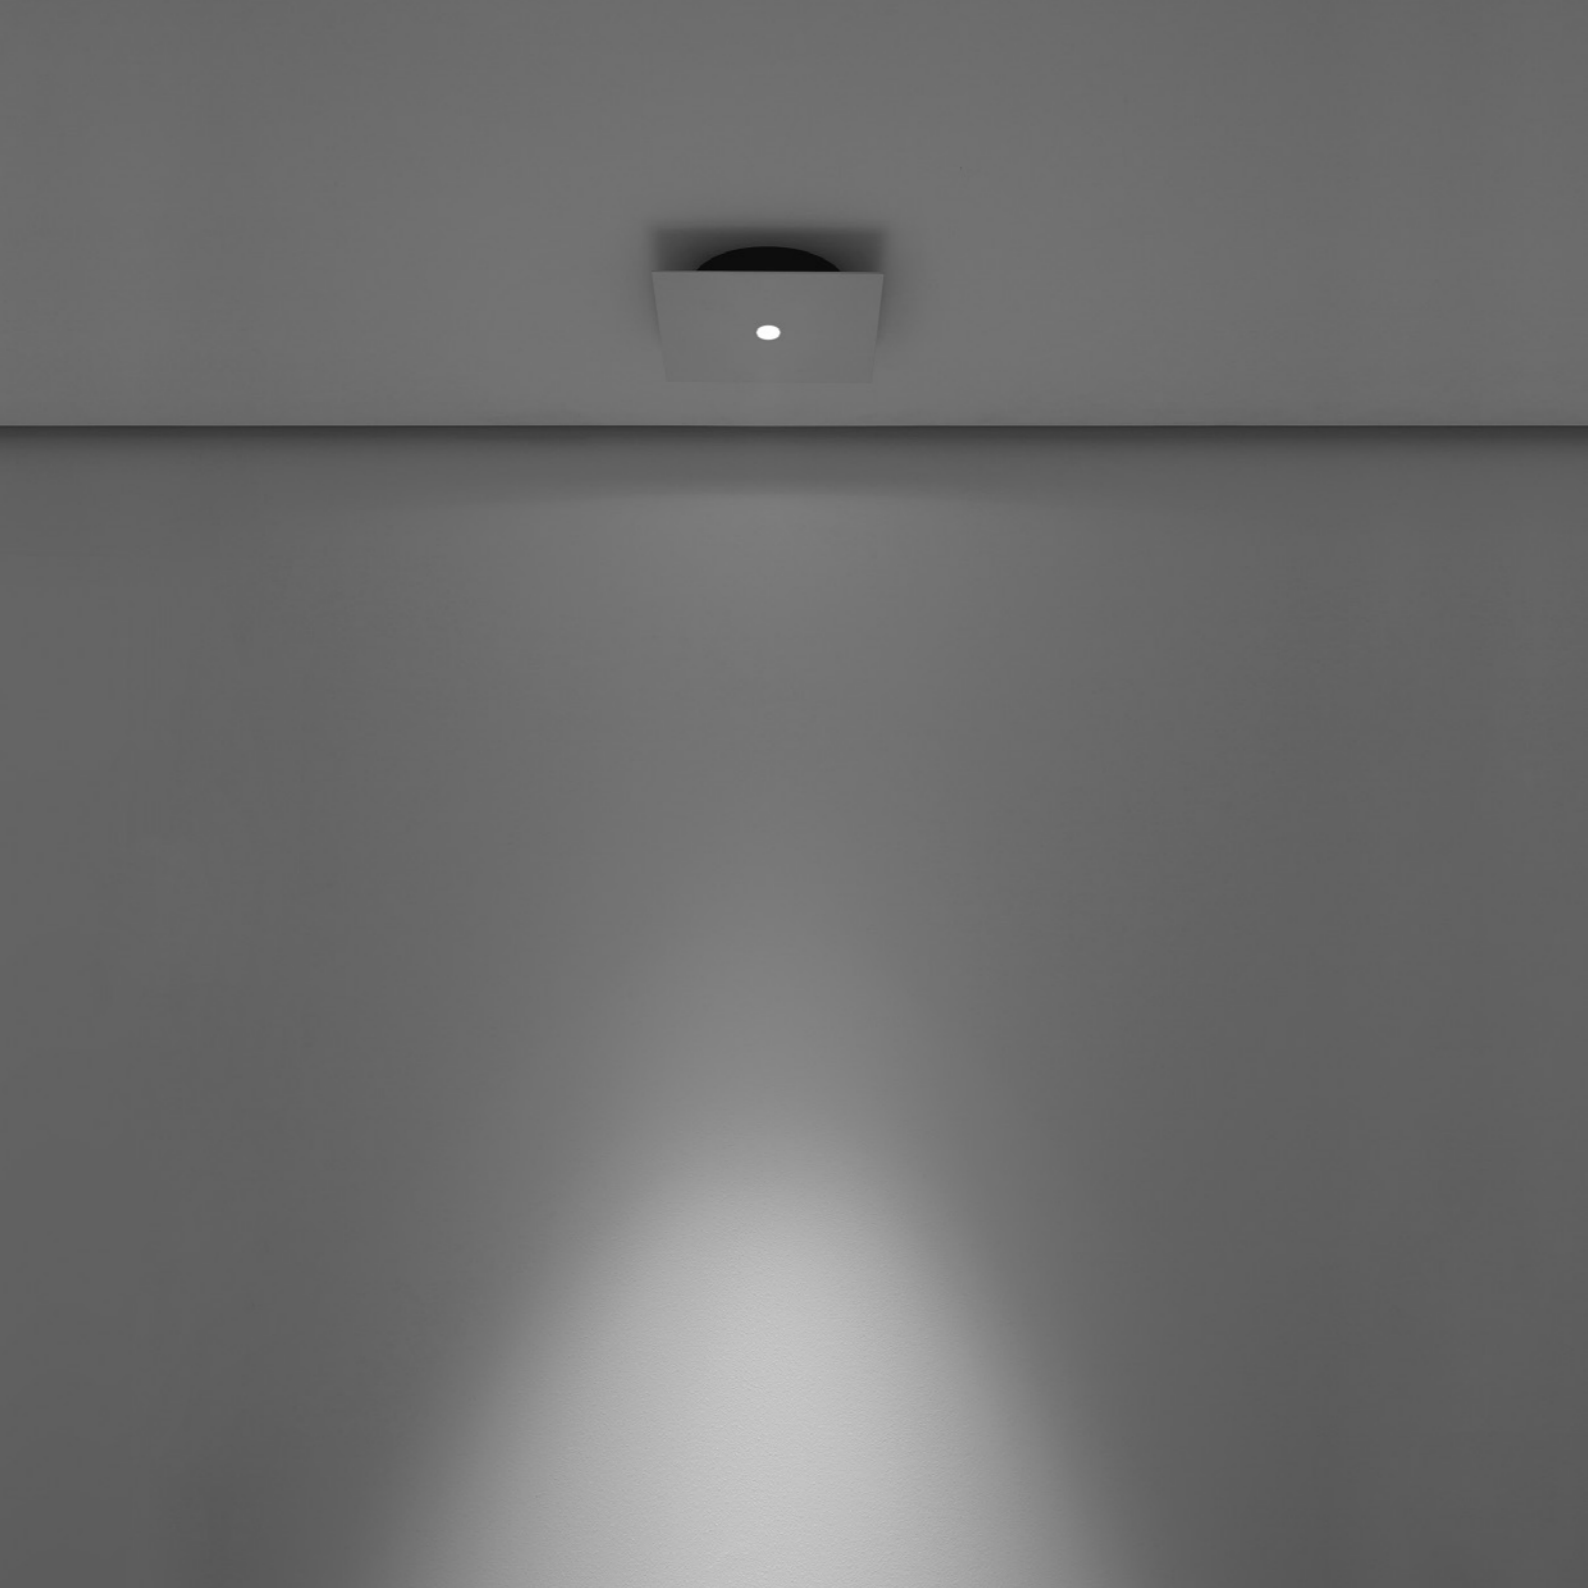

The marvellous Nulla project, also available in a surface mounted version.

# NULLA PL


Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White

Note Ceiling luminaire. Visible 0.71" diameter hole.



## NULLA PL

8,5W

120V - 60Hz

2700K - 460lm / 3000K - 495lm

CRI >90

Driver integrated

ON/OFF

Matt White - 2700K - ON/OFF

Matt White - 3000K - ON/OFF

1A2500303.27.00

1A2500303.30.00






A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions.



**PUNTO PL**


Max 17W  
 120V - 60Hz  
 CRI >90  
 Driver integrated  
 1-10V  
 LED module not included

Matt White - 1-10V  
 Matt White/Black Bicolor - 1-10V


1A1110303.00.03  
 1A1113403.00.03

**Compulsory accessories**


LED modules



<b>DG111 LED Module</b>		Not included
13,5W - 15° - 400mA DC 2700K - 1318lm - CRI >90 Energy Efficiency F - Dimmable	1A4700003.27.20	
13,5W - 15° - 400mA DC 3000K - 1345lm - CRI >90 Energy Efficiency F - Dimmable	1A4700003.30.20	



<b>DG111 LED module</b>		Not included
13,5W - 22° - 400mA DC 2700K - 1487lm - CRI >90 Energy Efficiency F - Dimmable	1A3890003.27.20	
13,5W - 22° - 400mA DC 3000K - 1556lm - CRI >90 Energy Efficiency F - Dimmable	1A3890003.30.20	



<b>DG111 LED module</b>		Not included
13,5W - 36° - 400mA DC 2700K - 1446lm - CRI >90 Energy Efficiency F - Dimmable	1A3900003.27.20	
13,5W - 36° - 400mA DC 3000K - 1512lm - CRI >90 Energy Efficiency F - Dimmable	1A3900003.30.20	

**Optional accessories**


Other accessories




<b>Accessory holder + Soft filter + Honeycomb louvre</b>		Not included
Matt Black	1X0070400.04.00	




<b>Accessory holder + Elliptical filter</b>		Not included
Matt Black	1X0070400.05.00	



<b>Blue filter</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



<b>Red filter</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



<b>Yellow filter</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00




A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions.



**PUNTO 2 PL**


Max 2x17W  
 120V - 60Hz  
 CRI >90  
 Driver integrated  
 1-10V  
 LED modules not included

Matt White - 1-10V  
 Matt White/Black Bicolor - 1-10V

1A1120303.00.03  
 1A1123403.00.03

**Compulsory accessories**

LED modules



<b>DG111 LED Module</b>	Not included
13,5W - 15° - 400mA DC 2700K - 1318lm - CRI >90 Energy Efficiency F - Dimmable	1A4700003.27.20
13,5W - 15° - 400mA DC 3000K - 1345lm - CRI >90 Energy Efficiency F - Dimmable	1A4700003.30.20



<b>DG111 LED module</b>	Not included
13,5W - 22° - 400mA DC 2700K - 1487lm - CRI >90 Energy Efficiency F - Dimmable	1A3890003.27.20
13,5W - 22° - 400mA DC 3000K - 1556lm - CRI >90 Energy Efficiency F - Dimmable	1A3890003.30.20



<b>DG111 LED module</b>	Not included
13,5W - 36° - 400mA DC 2700K - 1446lm - CRI >90 Energy Efficiency F - Dimmable	1A3900003.27.20
13,5W - 36° - 400mA DC 3000K - 1512lm - CRI >90 Energy Efficiency F - Dimmable	1A3900003.30.20

**Optional accessories**


Other accessories




<b>Accessory holder + Soft filter + Honeycomb louvre</b>	Not included
Matt Black	1X0070400.04.00




<b>Accessory holder + Elliptical filter</b>	Not included
Matt Black	1X0070400.05.00



<b>Blue filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



<b>Red filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00




<b>Yellow filter</b>	Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



## SANMARTINO

Omar Carraglia - Davide Groppi / 2014



Where did the chandelier go?  
A work about absence. About something missing. As if by removing the chandelier, its  
memory stays, but with a modern and sensual light.

# SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal  
Finish .03 Matt White .15 Natural Brass

Note Ceiling luminaire. Visible 0.71" diameter hole.





## SANMARTINO

8,5W  
120V - 60Hz  
3000K - 375lm  
CRI >90  
Driver integrated  
ON/OFF

Matt White - 3000K - ON/OFF  
Natural Brass - 3000K - ON/OFF

1A3420303.30.00  
1A3421503.30.00

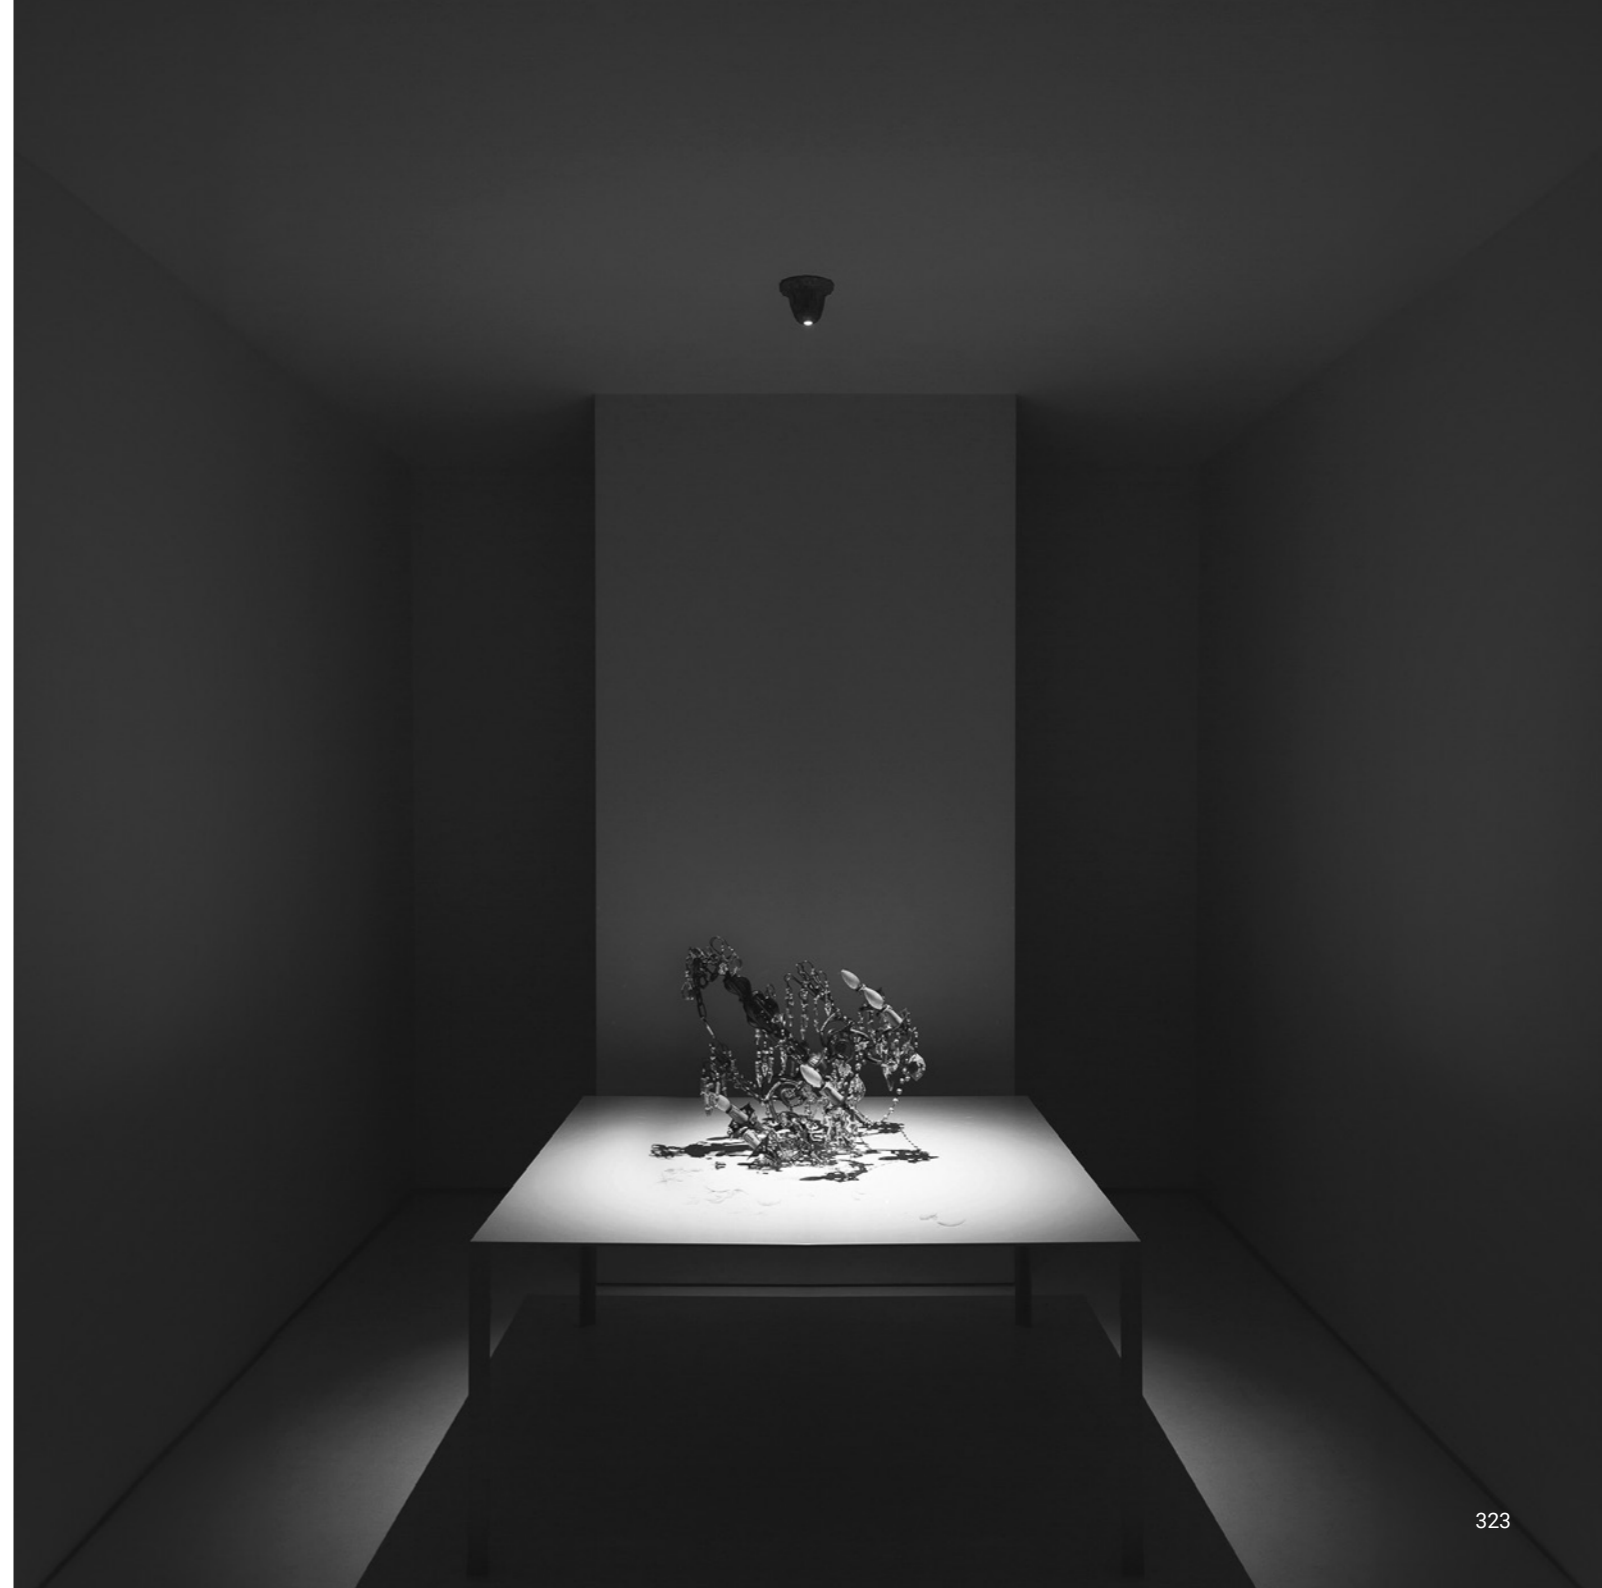

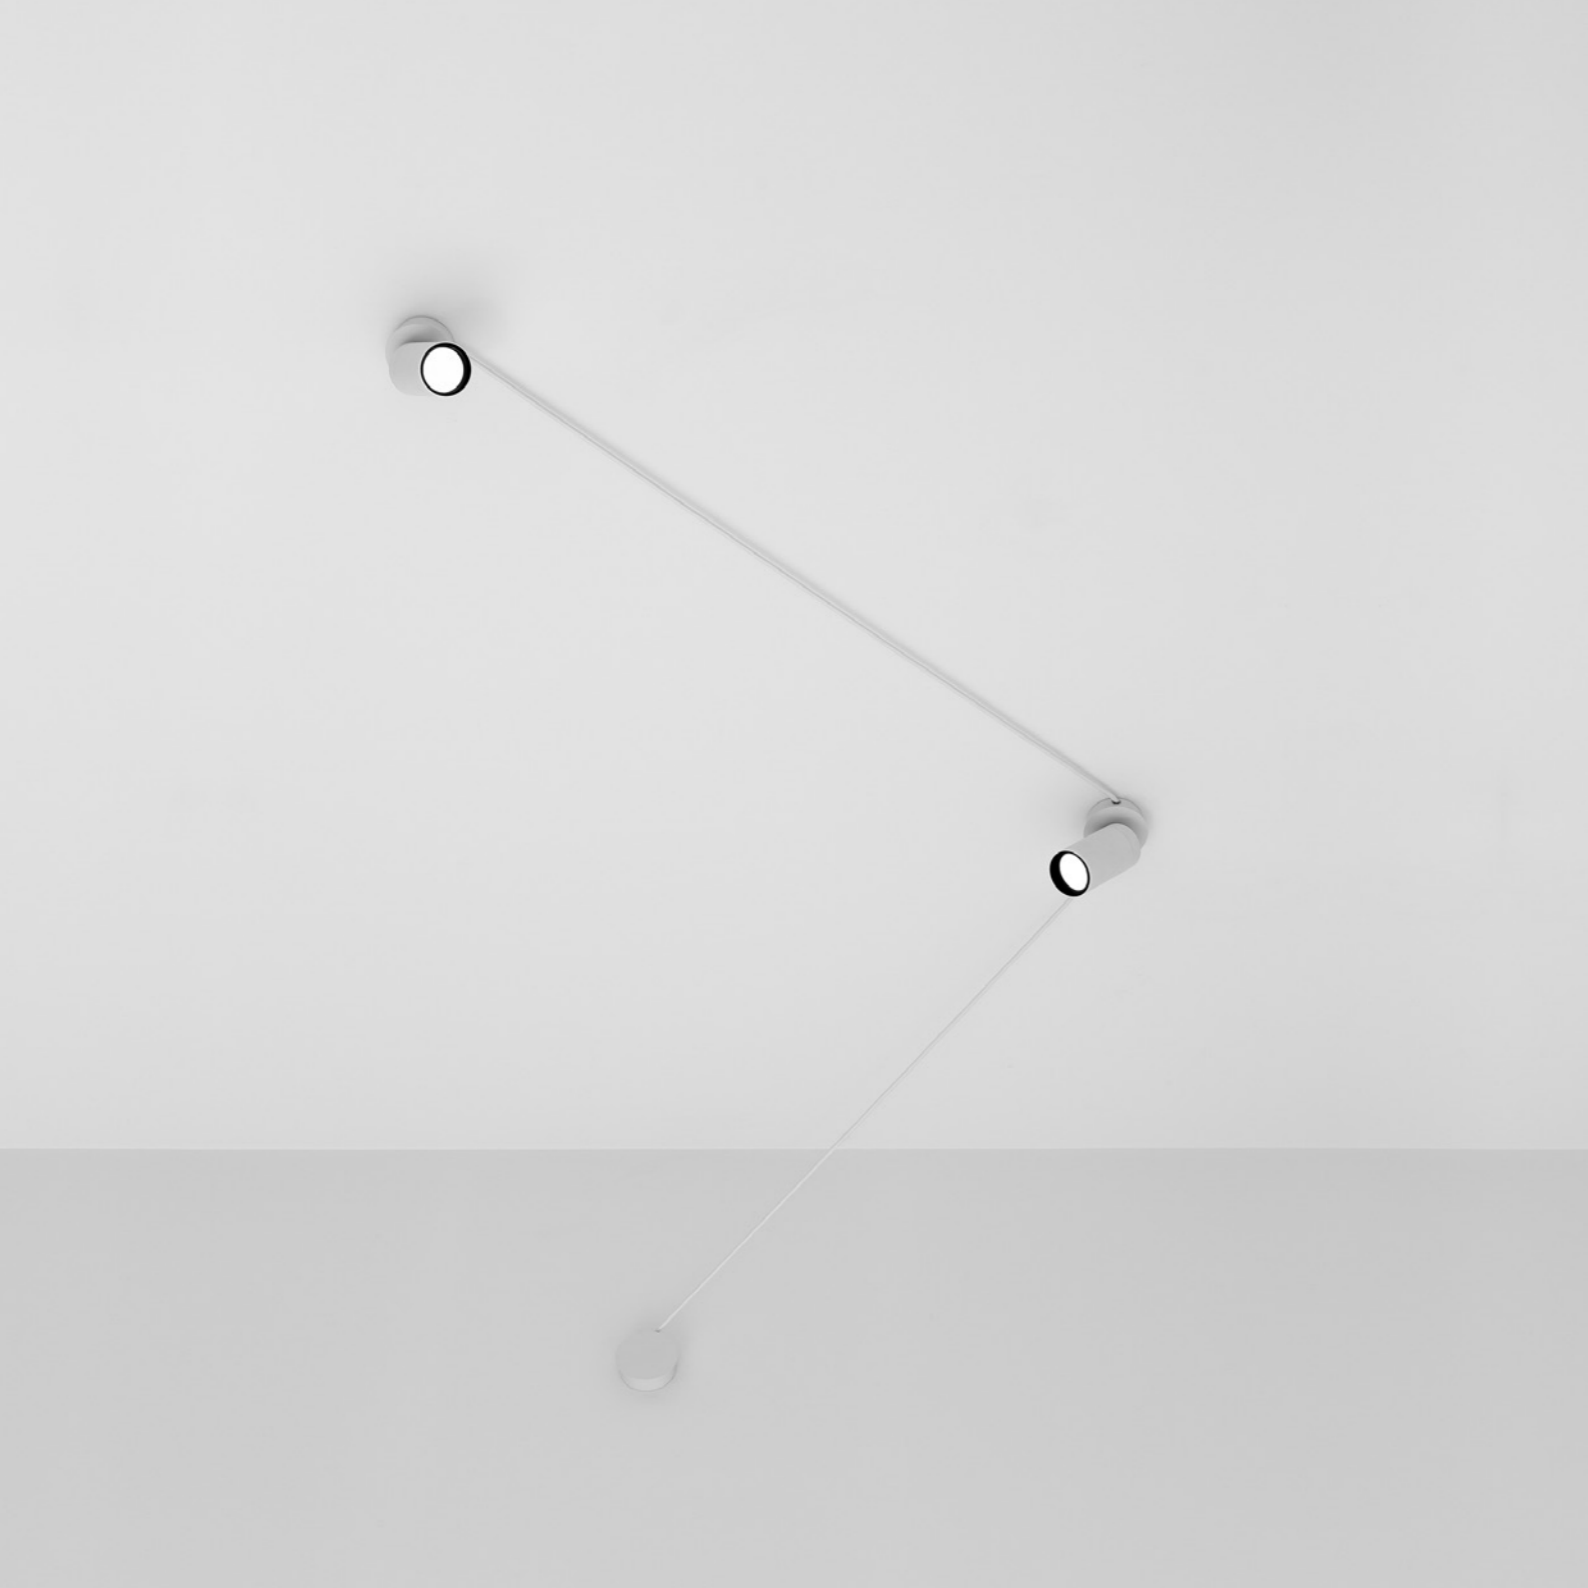

A simple, graphic solution.  
Bringing accent lighting with an external wiring system.


# TRICK TRACK

/ 2016

Wall-Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Ceiling luminaire. Adjustable in all directions. White cable (78.74") for the matt white finish. Black cable (78.74") for the matt black finish. Connects max 20 lamps.



**TRICK TRACK**


Max 10W - GU10  
 120V - 60Hz  
 ON/OFF  
 Bulb not included

Matt White - ON/OFF  
 Matt Black - ON/OFF

1A3430303.00.00  
 1A3430403.00.00

**Optional accessories**

Installation kits



**Wall and ceiling rose**

Not included

Matt White 1A3440303.00.00  
 Matt Black 1A3440403.00.00



**RECESSED**



A tool to light.  
The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# BUCO 58

/ 2021

Recessed / Direct / Indoor

**Material** Glass - Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Recessed luminaire. Plasterboard hole: Ø 1.96". Minimum space for recessed installation: 5.90".



## BUCO 58

7W  
 24V DC  
 2700K - 495lm / 3000K - 546lm  
 CRI >90  
 Beam 40°

Driver not included




Certificated 7AO-VENUS Flexalighting Product

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K

1A1490303.27.20  
 1A1490303.30.20  
 1A1490403.27.20  
 1A1490403.30.20

## Compulsory accessories

Drivers




Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

## Optional accessories

Installation kits



Installation box		Not included
Standard	Cut-out Ø 2.09" Minimum space for mounting 5.91"	1A1500000.00.00

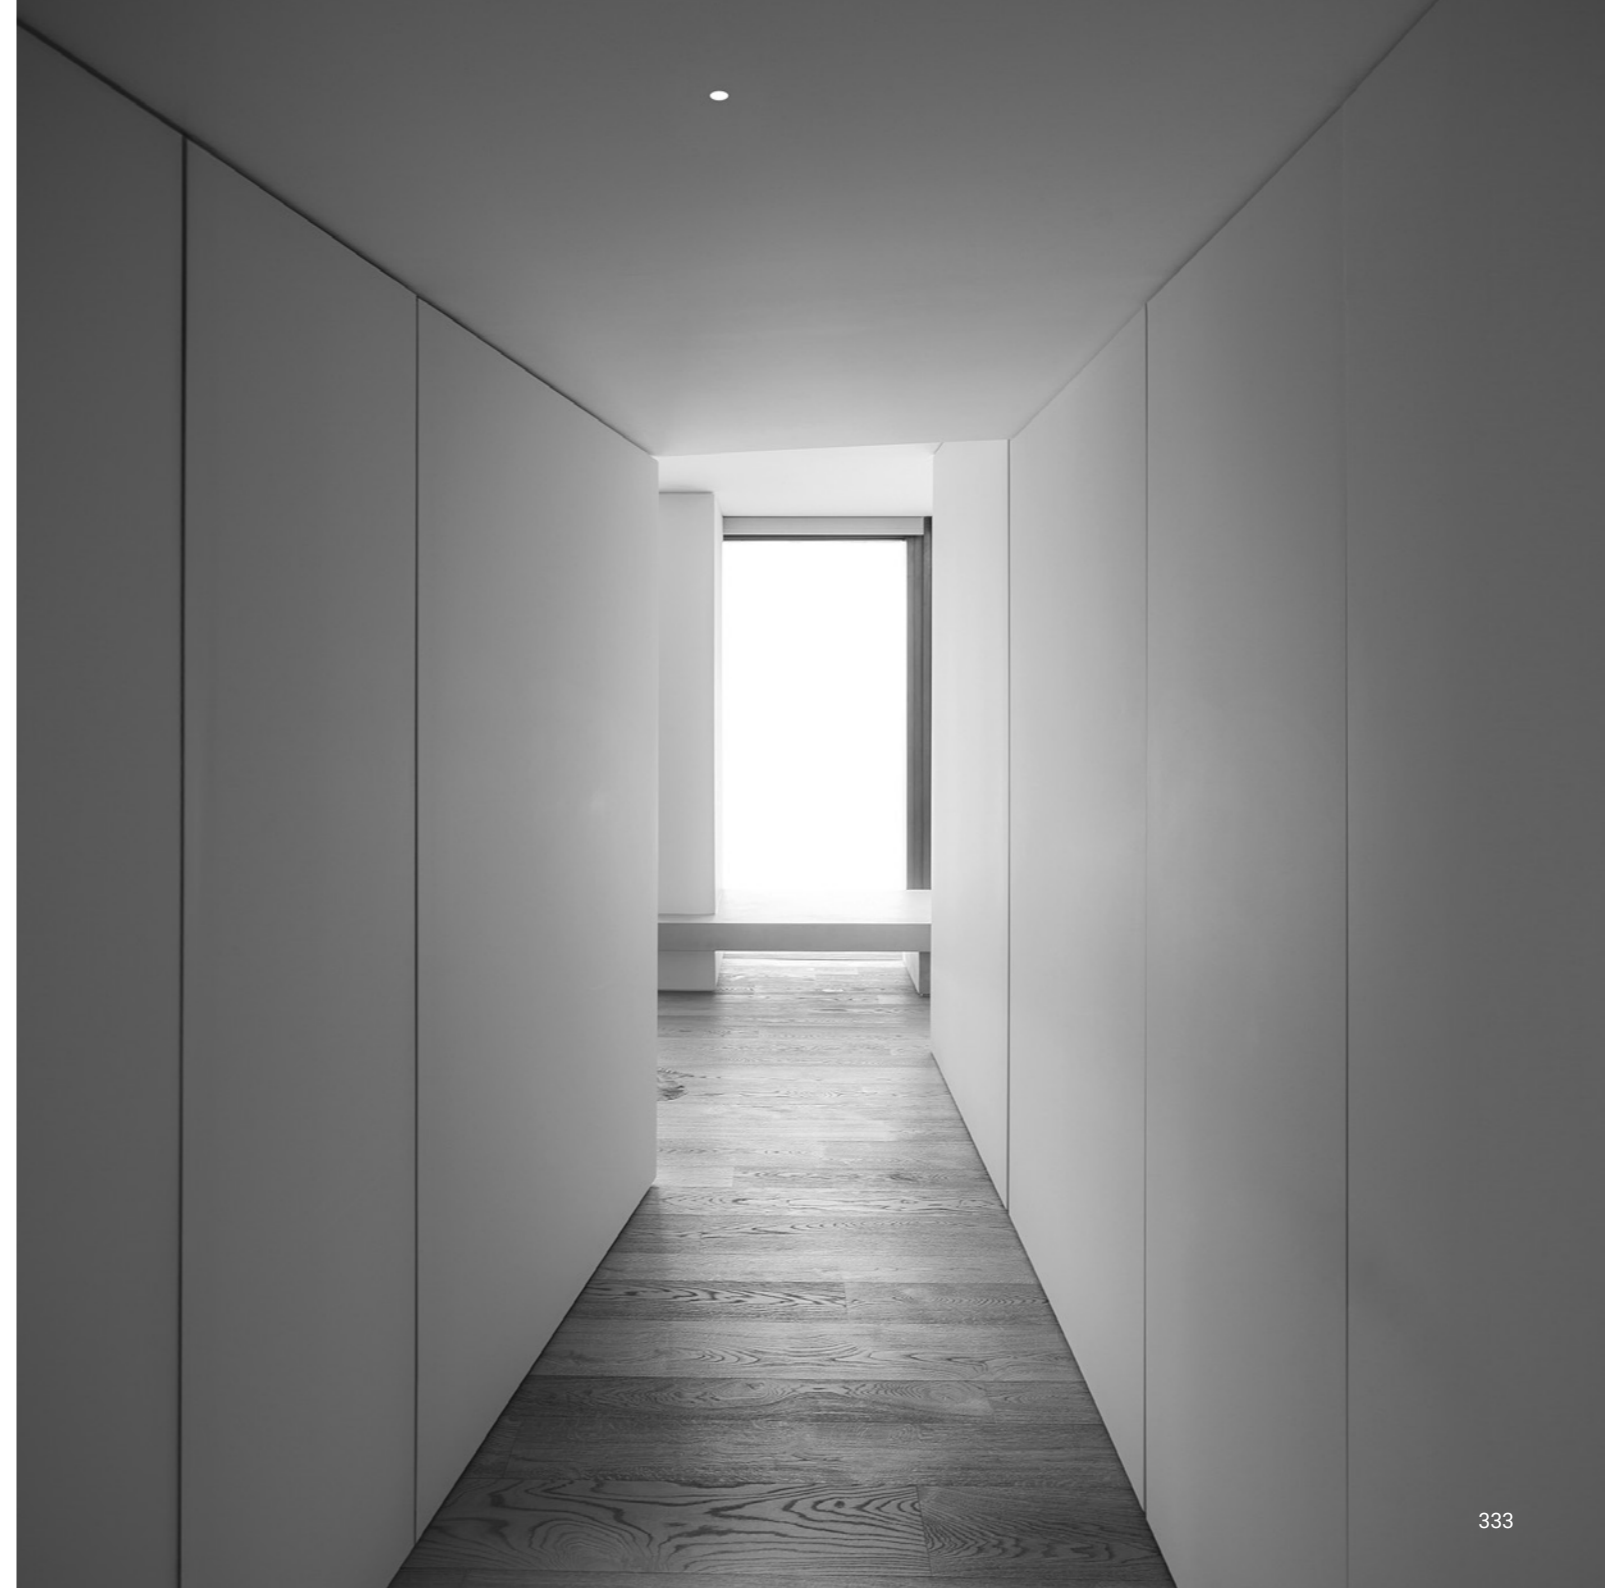

## DOT R

Omar Carraglia - Davide Groppi / 2015



A tool to light.


A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.



Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 1.57"x1.57". Minimum space for recessed installation: 3.35".



**DOT R**


13W  
 Max 350mA DC  
 2700K / 3000K  
 CRI >97  
 Driver not included

Matt White - 2700K  
 Matt White - 2700K  
 Matt Black - 2700K  
 Matt Black - 3000K

1A4770303.27.20  
 1A4770303.30.20  
 1A4770403.27.20  
 1A4770403.30.20

**Compulsory accessories**

**Drivers**



Driver		Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	1Z0240870.350

**Other accessories**




Lens		Not included
Beam - 14°	2700K - CRI >97 - 983lm	1A3090000.00.00
	3000K - CRI >97 - 1038lm	
Beam - 24°	2700K - CRI >97 - 943lm	1A3100000.00.00
	3000K - CRI >97 - 996lm	
Beam - 36°	2700K - CRI >97 - 955lm	1A3110000.00.00
	3000K - CRI >97 - 1005lm	
Beam - 50°	2700K - CRI >97 - 965lm	1A3120000.00.00
	3000K - CRI >97 - 1016lm	

**Optional accessories**


**Other accessories**




Accessory holder + Honeycomb louvre		Not included
		1X0080400.01.00



Elliptical filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.02.00



Blue filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.03.00




Red filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.04.00



Yellow filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.05.00

# MIRA R

Omar Carraglia / 2015

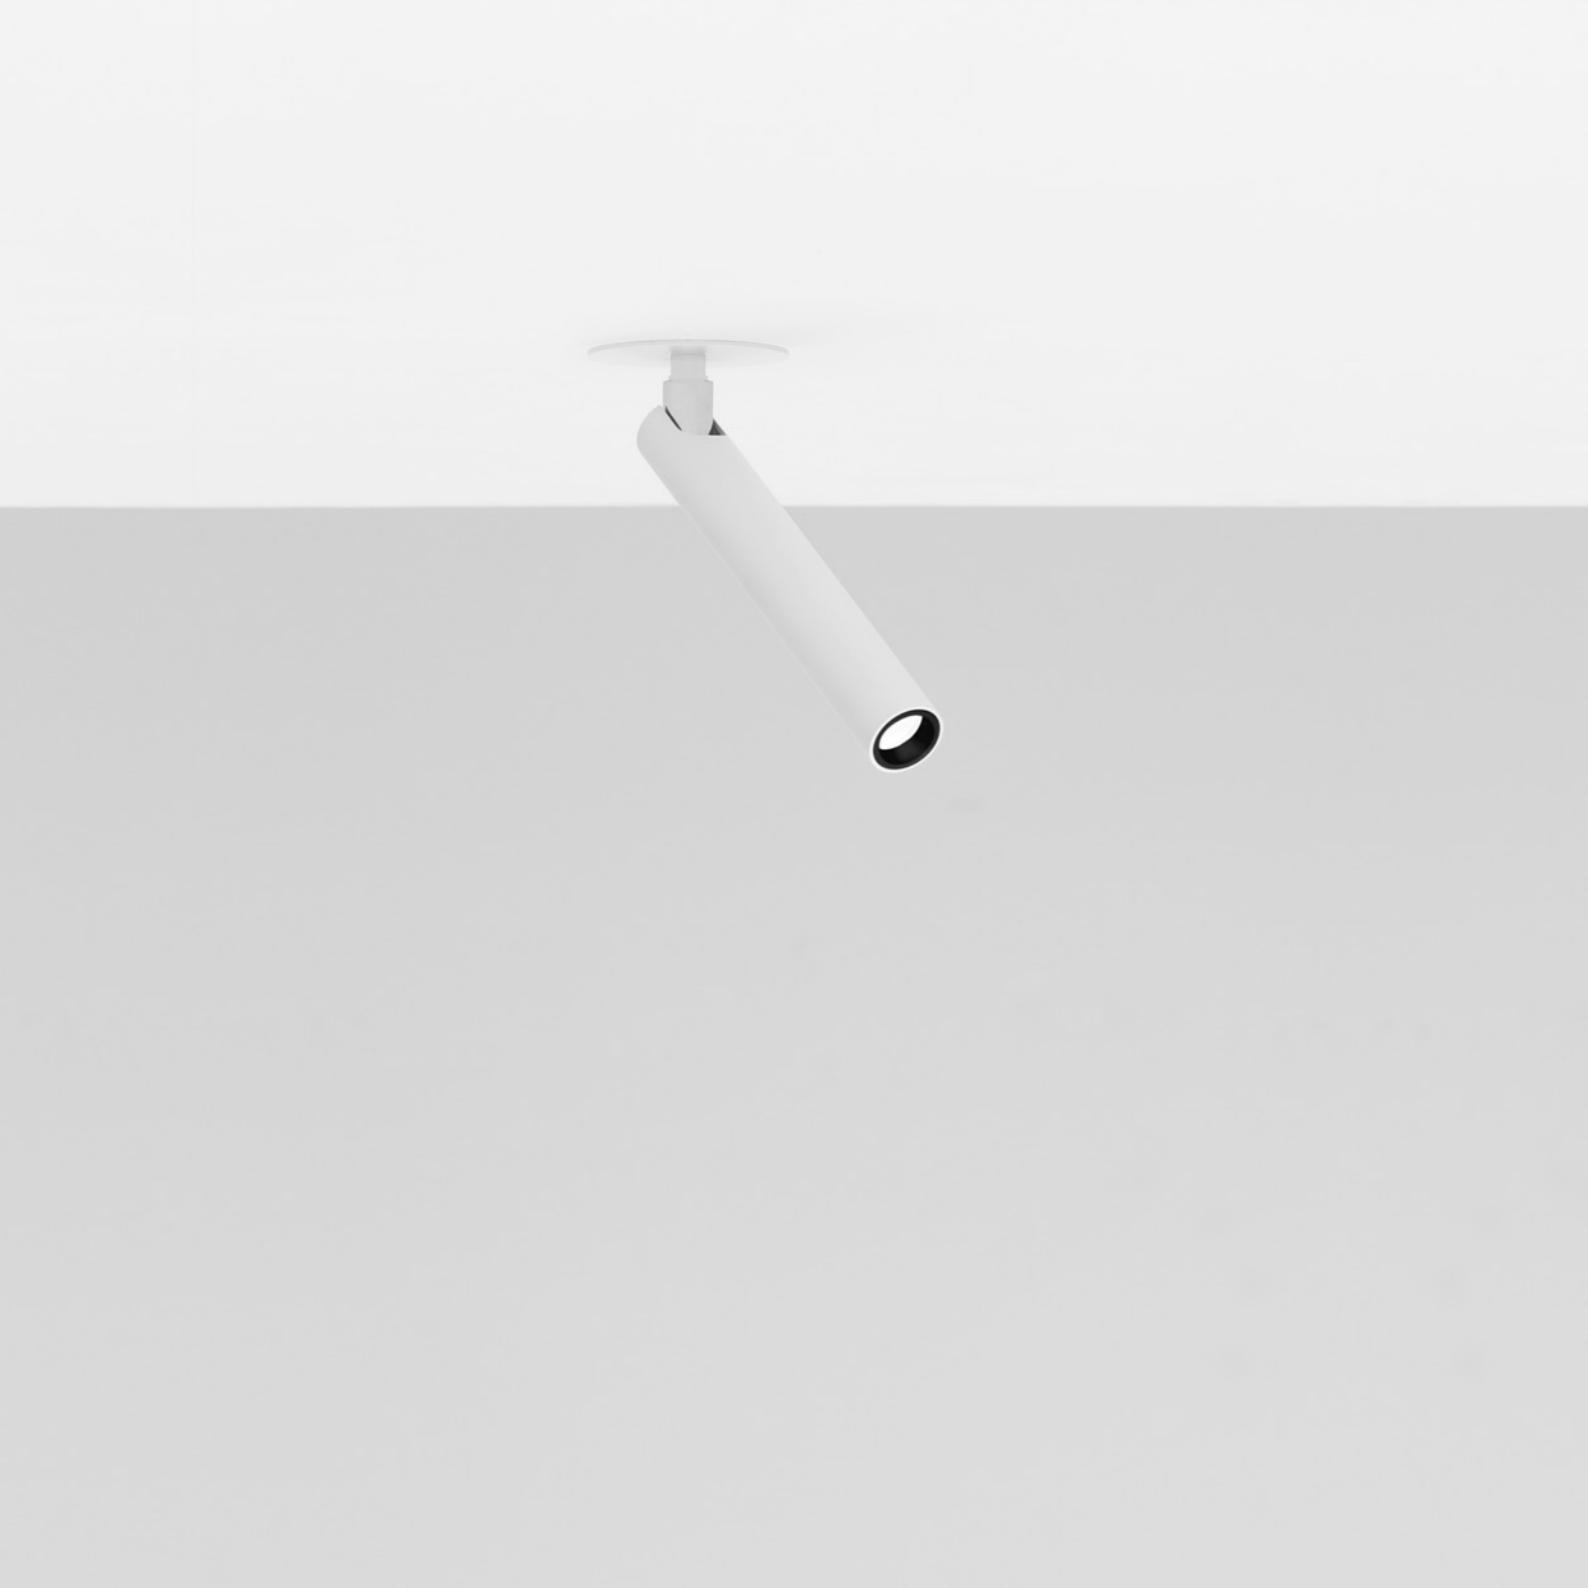

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


# MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 1.57"x1.57". Minimum space for recessed installation: 3.34".



## MIRA R

5,6W  
 Max 500mA DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included




Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K


1A3690303.27.20  
 1A3690303.30.20  
 1A3690403.27.20  
 1A3690403.30.20

## Compulsory accessories

Drivers



Driver	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0241180.500



Driver	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500





An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light.

It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

**XXIII Compasso d'Oro ADI Award, 2014**


Compasso d'Oro ADI  
Award 2014



Recessed / Direct / Indoor

**Material** Metal  
**Finish** .00 Standard

**Note** Recessed luminaire. Visible 0.71" / 0.98" diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.




**NULLA - 23°**

9W  
 24V DC  
 2700K - 304lm / 3000K - 327lm  
 CRI >90  
 Beam 23°  
 UGR <19  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A4100003.27.20  
 1A4100003.30.20



**NULLA - 32°**

9W  
 24V DC  
 2700K - 384lm / 3000K - 413lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A2110003.27.20  
 1A2110003.30.20




**NULLA 18 - 20°**

3W  
 24V DC  
 2700K - 162lm / 3000K - 173lm  
 CRI >90  
 Beam 20°  
 UGR <19  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A2010003.27.20  
 1A2010003.30.20



**NULLA 25 - 23°**

5W  
 24V DC  
 2700K - 228lm / 3000K - 245lm  
 CRI >90  
 Beam 23°  
 UGR <19  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A4080003.27.20  
 1A4080003.30.20



**NULLA 25 - 32°**

5W  
 24V DC  
 2700K - 288lm / 3000K - 310lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A2020003.27.20  
 1A2020003.30.20



**NULLA 25 T24**

5,6W  
 Max 500mA DC  
 3000K - 357lm / 2700K - 357lm  
 CRI >90  
 Driver not included



Standard - 3000K  
 Standard - 2700K

1A1010003  
 1A1010003-27

**Compulsory accessories**

Installation kits



<b>Plasterboard flange 0.49"</b> <span style="float: right;">Not included</span>			
Matt Black	Cut-out Ø 0.83" Minimum space for mounting 3.94" IP65	NULLA	1A2200400.00.00



<b>Plasterboard flange 0.49"</b> <span style="float: right;">Not included</span>			
Matt Black	Cut-out Ø 0.87" Minimum space for mounting 7.48"	NULLA 18	1A2210400.00.00



<b>Plasterboard flange 0.49"</b> <span style="float: right;">Not included</span>			
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 7.48"	NULLA 25	1A2170400.00.00



<b>Plasterboard flange 0.49"</b> <span style="float: right;">Not included</span>			
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 5.71" IP65	NULLA 25	1A3980400.00.00




<b>Plasterboard flange (bottom) ≠ 0.49"</b> <span style="float: right;">Not included</span>			
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 5.71" IP65	NULLA 25	1A4960400.00.00




<b>Plasterboard flange 0.49"</b> <span style="float: right;">Not included</span>			
	Cut-out Ø 1.38" Minimum space for mounting 6.30" IP65	NULLA 25 T24	18250000

**Compulsory accessories**


Drivers




<b>Driver</b> <span style="float: right;">Not included</span>			
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 18 / NULLA 25	1Z0241180.24



<b>Driver</b> <span style="float: right;">Not included</span>			
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	NULLA / NULLA 18 / NULLA 25	1Z0240870.24




<b>Driver</b> <span style="float: right;">Not included</span>			
120-277V	24V/60W/IP20/TRIAC - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z2020040



<b>Driver</b> <span style="float: right;">Not included</span>			
120V	500mA/50W/IP20/1-10V Min 2 units - Max 4 units	NULLA 25 T24	1Z2000010

**Optional accessories**


Installation kits




<b>Trapdoor for plasterboard 0.49"</b> <span style="float: right;">Not included</span>			
Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00




<b>Trapdoor for plasterboard 0.49"</b> <span style="float: right;">Not included</span>			
Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00




<b>Masonry Box</b> <span style="float: right;">Not included</span>			
Standard		NULLA 18	1A2390000.00.00




<b>Masonry Box</b> <span style="float: right;">Not included</span>			
Standard		NULLA 25	1A2380000.00.00

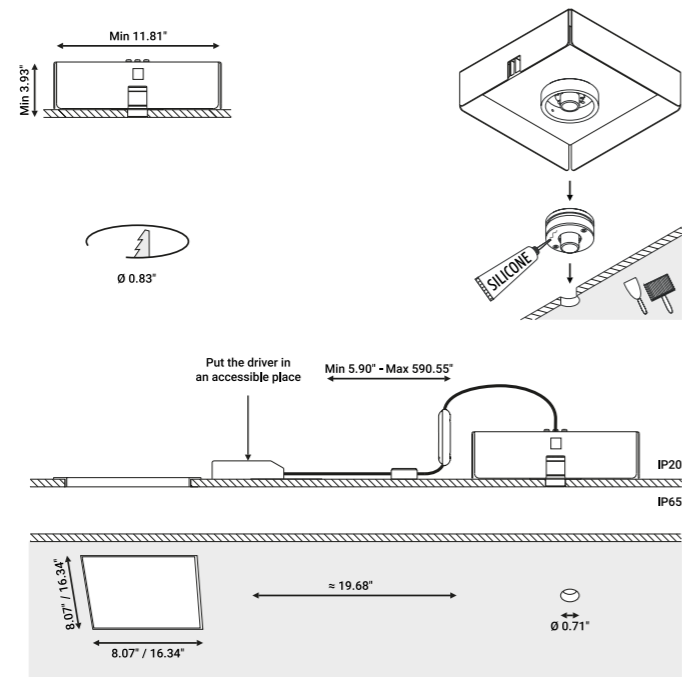


NULLA installation conditions

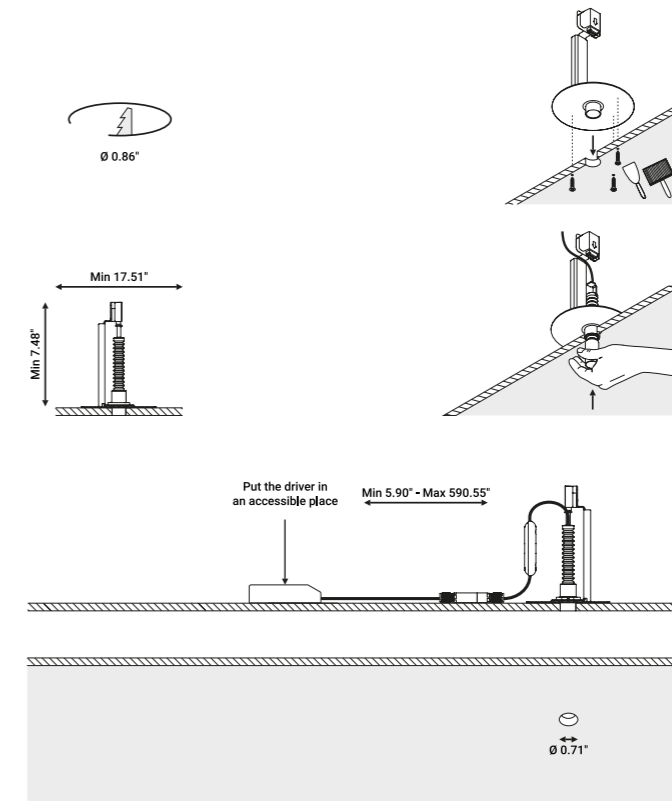

NULLA 18 installation conditions

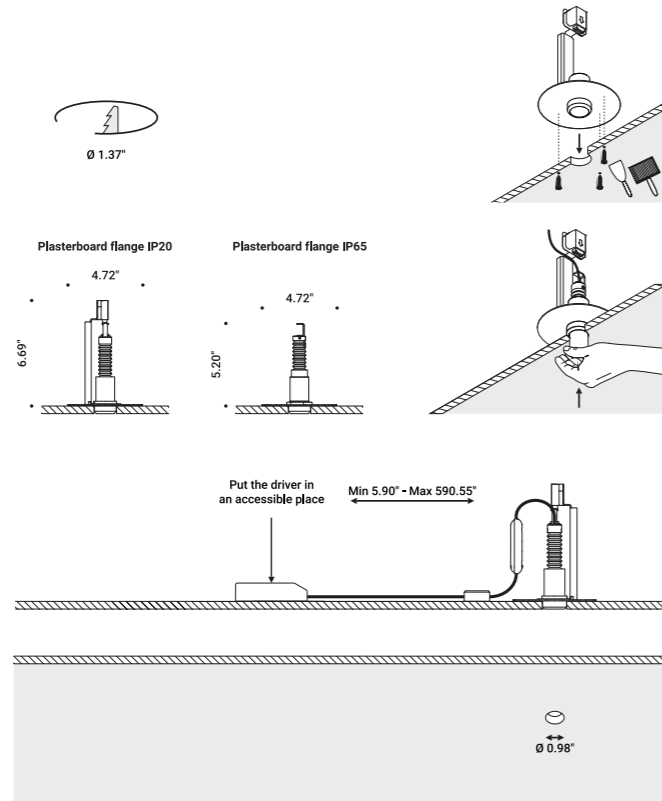


NULLA 25 installation conditions

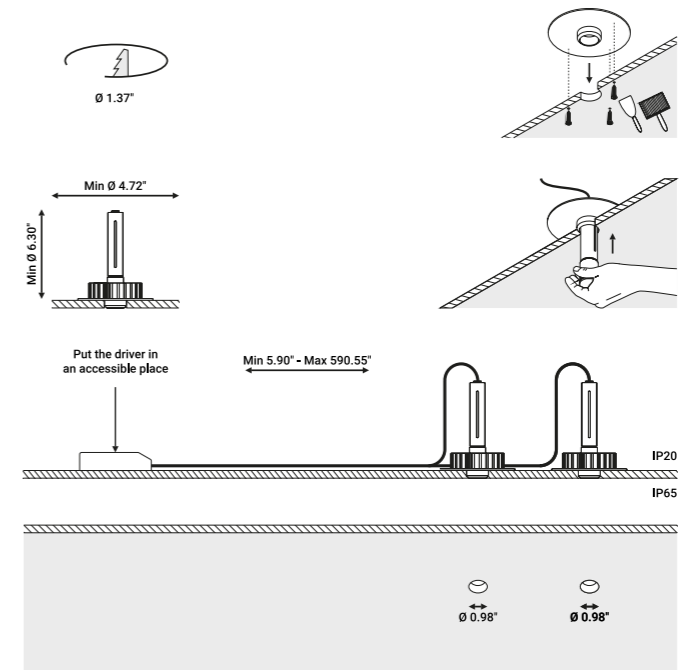

NULLA 25 T24 installation conditions



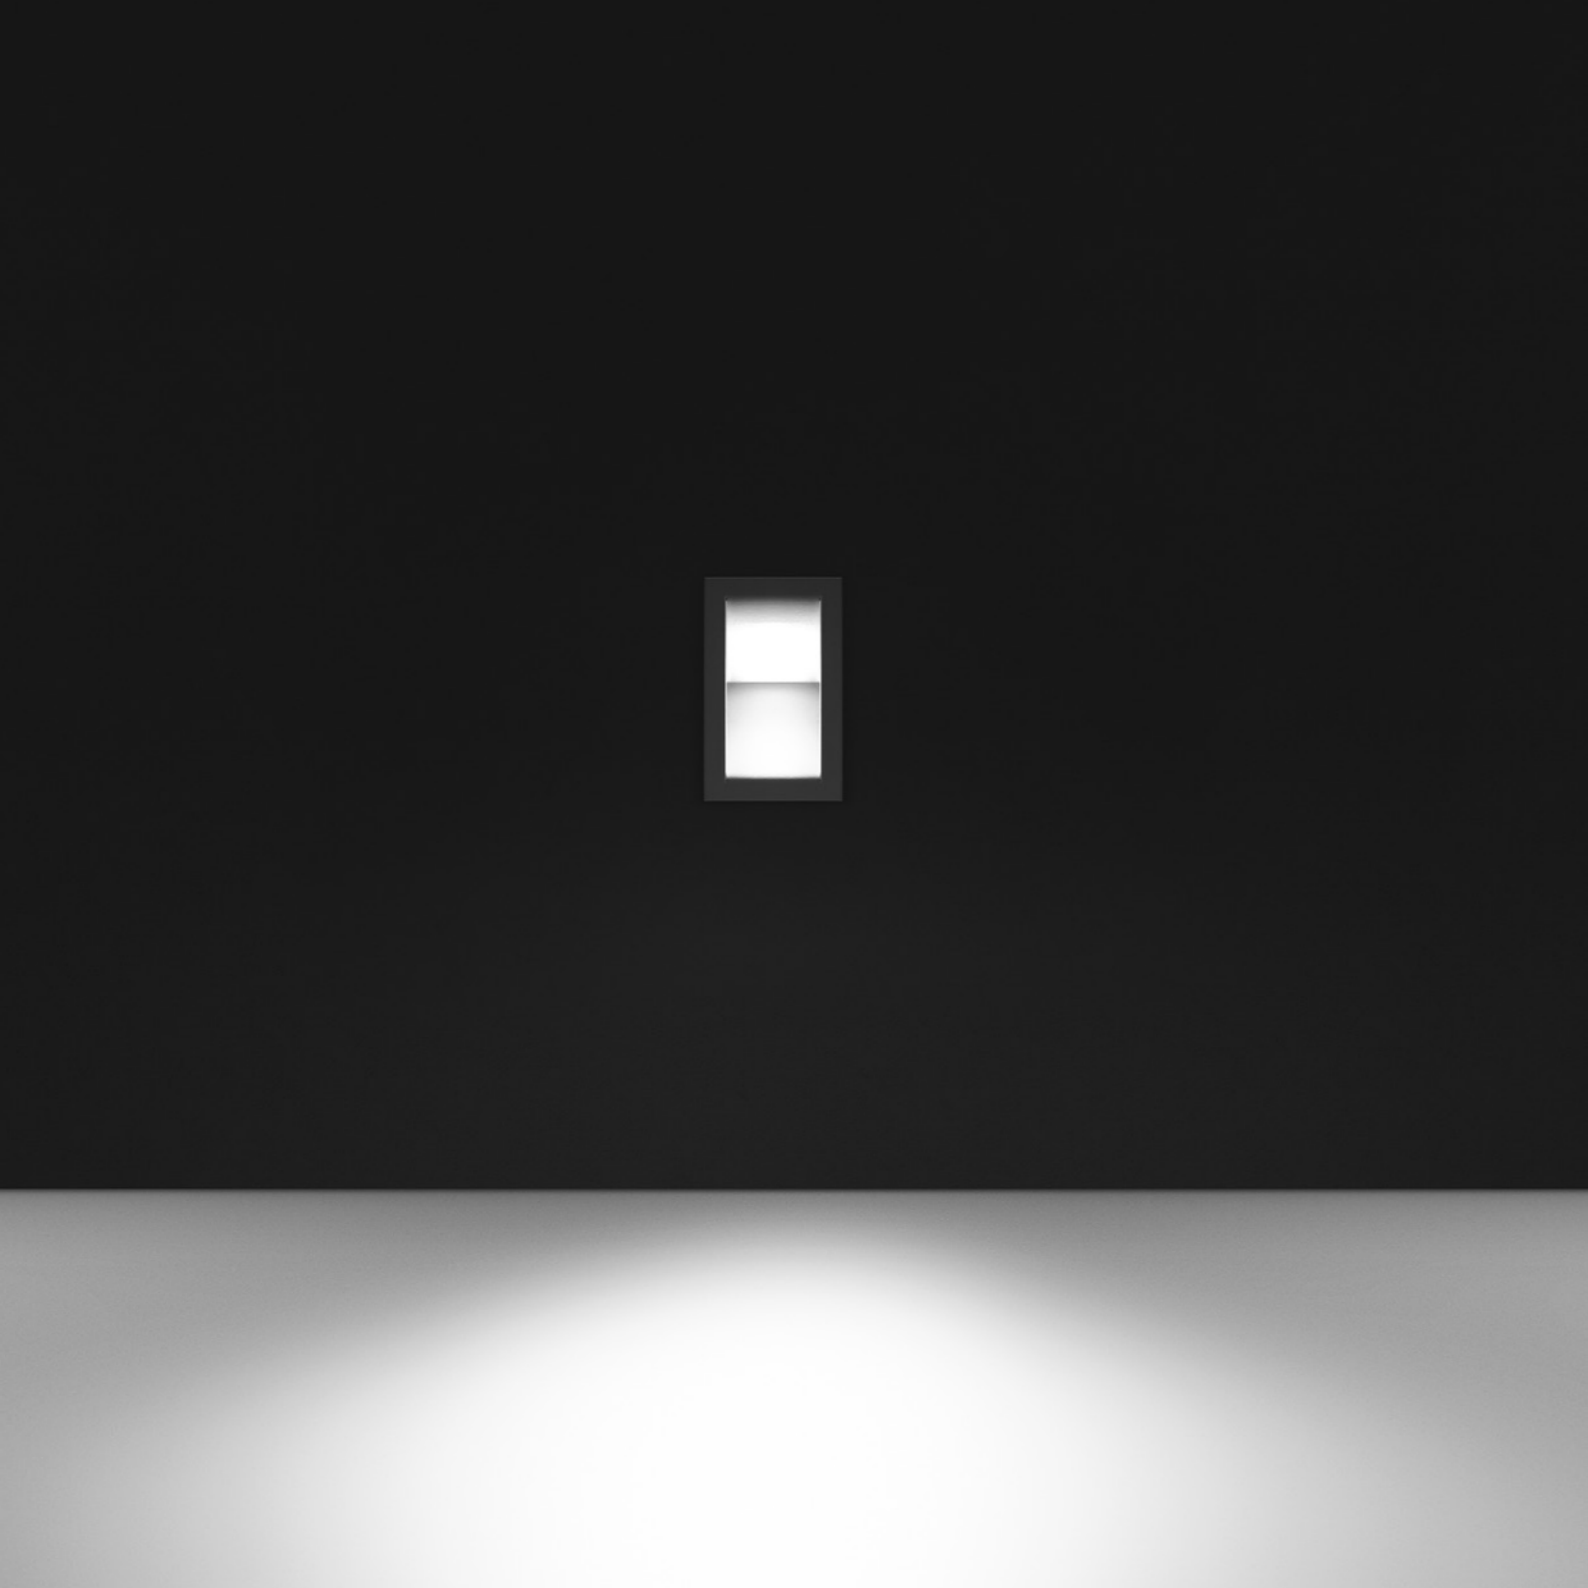

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# QUAD

/ 2021

Recessed / Diffuse / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Recessed luminaire. Plasterboard hole: 1.57"x2.36". Minimum space for recessed installation: 2.55".



### QUAD

2W

Max 500mA DC

2700K - 128lm / 3000K - 133lm

CRI >90

Driver not included



Certificated 2A-DAG02 Flexalighting Product

Matt White - 2700K


Matt White - 3000K

1A1510303.27.20

1A1510303.30.20

## Compulsory accessories

Drivers



### Driver


220-240V(110-127V) 500mA/24W(15W)/IP68/ON/OFF

1Z0241170

Not included

## Optional accessories

Installation kits



### Installation box

Standard Plasterboard cut-out 1.57" x 2.36"  
 Minimum space for mounting 3.15"

1A1520000.00.00

Not included



**SYSTEMS**




## ENDLESS

Davide Groppi / 2018

Absolute freedom, absolute spatiality, absolute creativity.  
An adhesive tape that conducts electricity can be placed anywhere  
on walls and ceilings to power our lighting projects.  
Endless is the system created and patented by our Team in order to transport  
electric energy in a digital and graphic manner.  
It's the idea of considering walls and ceilings like electronic circuits,  
where luminaires can be done fixed freely and easily.  
This system comes with various accessories  
to provide and manage the flow of electricity.


201811 3990010 device\_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010  
 201811 3990010 device\_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010  
 201811 3990010 device\_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010  
 201811 3990010 device\_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010

POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY

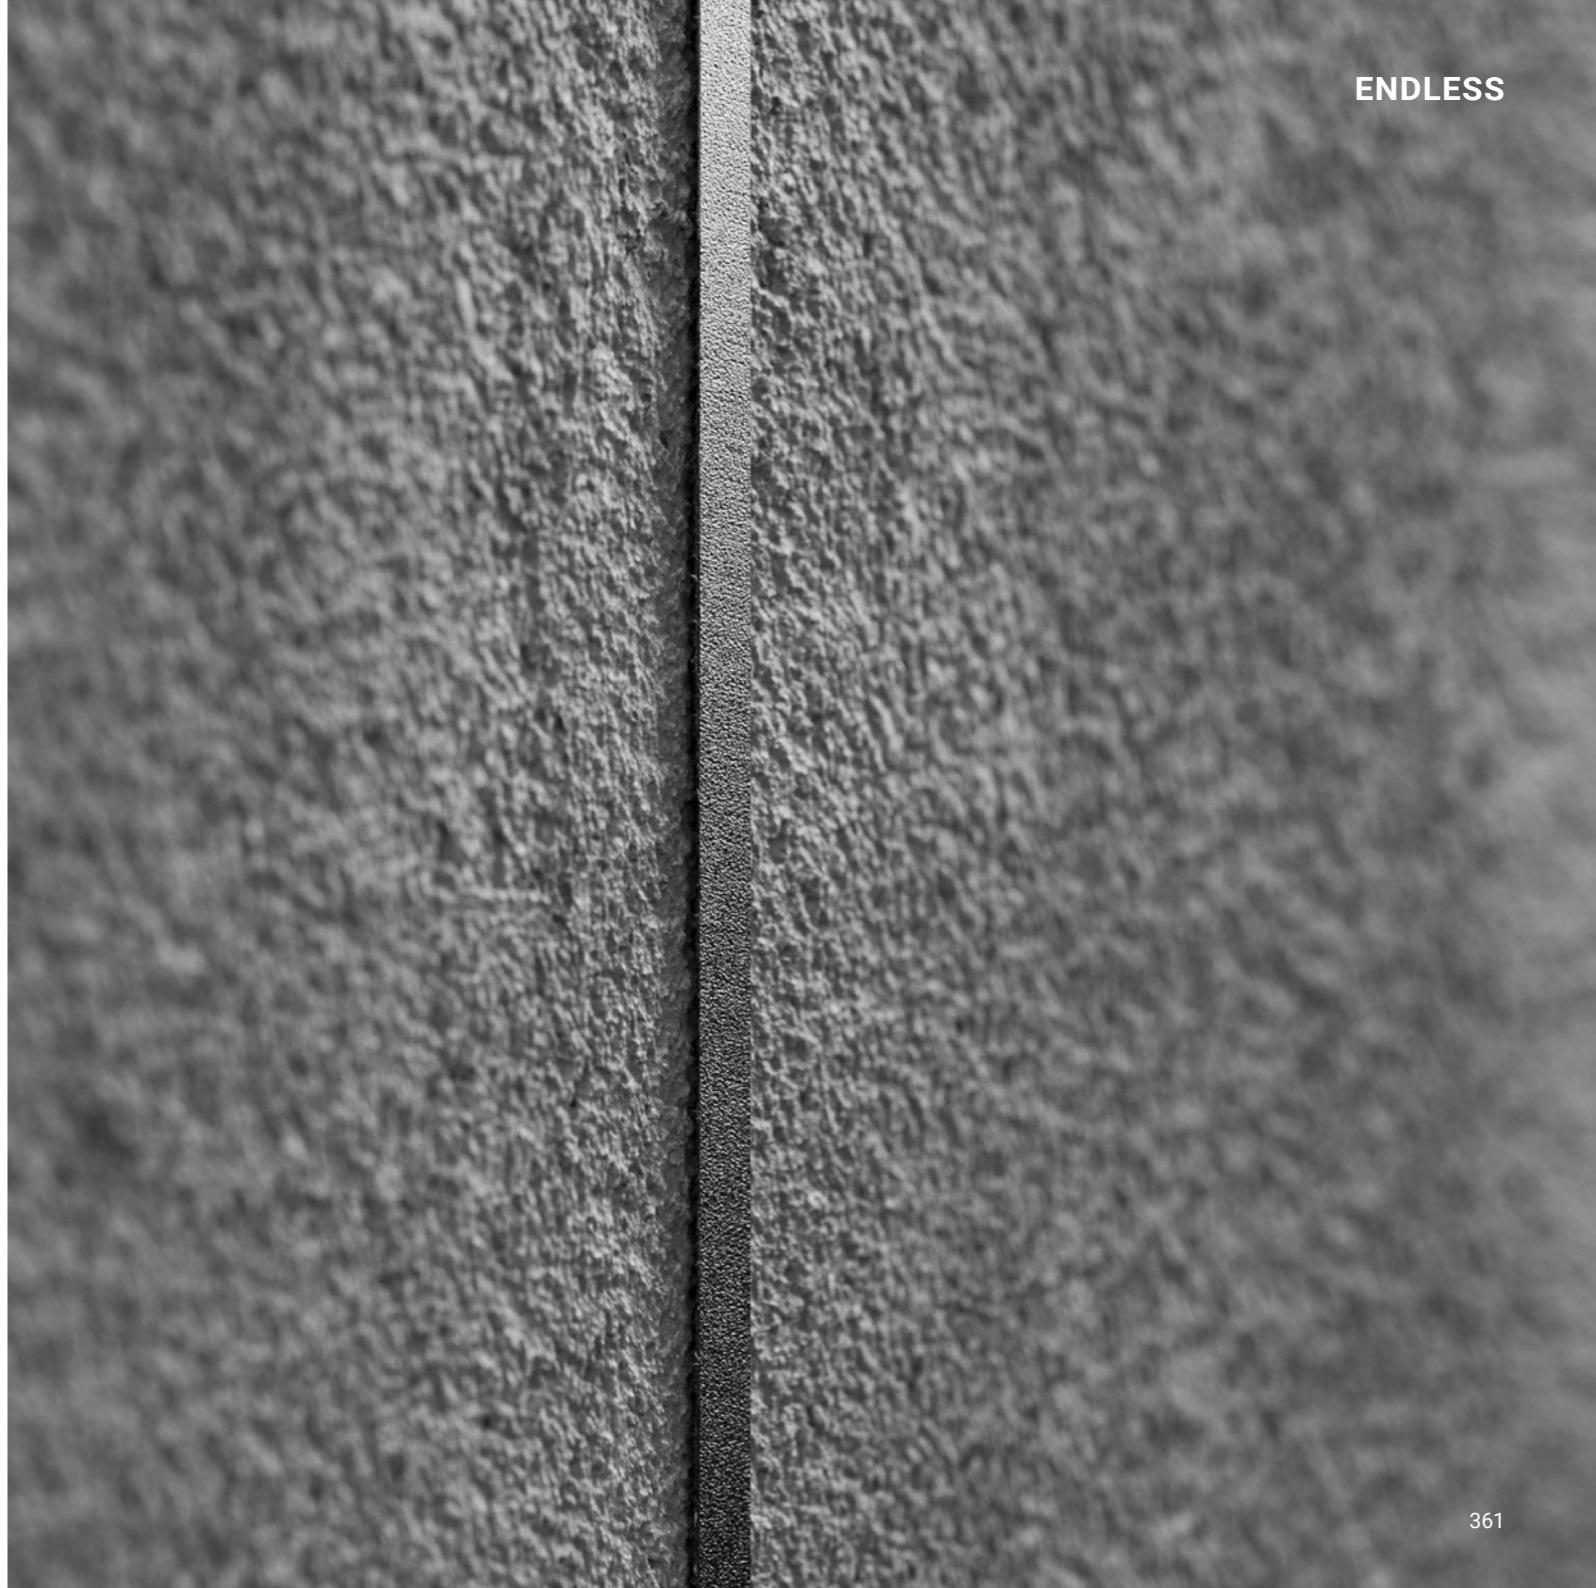


ENDLESS


**ENDLESS ON/OFF**  
(Max 48V DC -  
Max 150W - Max 4A)

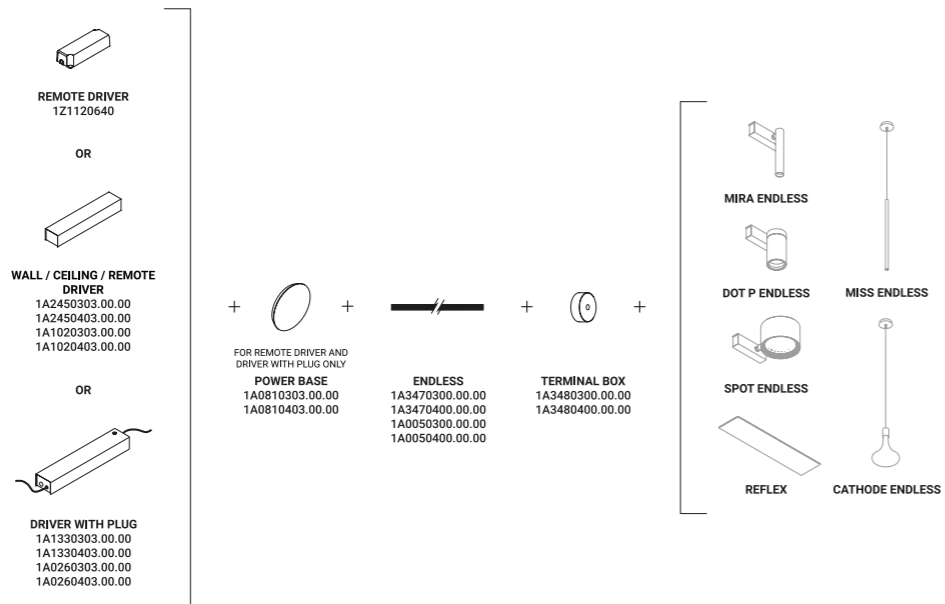


**ENDLESS dimmable**  
(Max 48V DC -  
Max 150W - Max 4A)

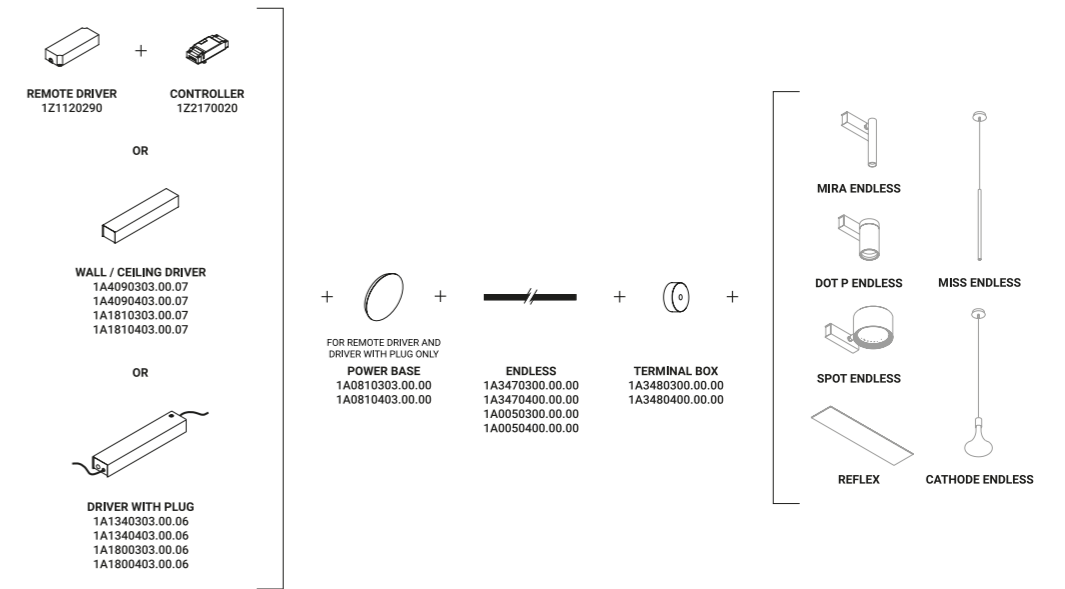

**ENDLESS CASAMBI**  
(Max 48V DC -  
Max 150W - Max 4A)

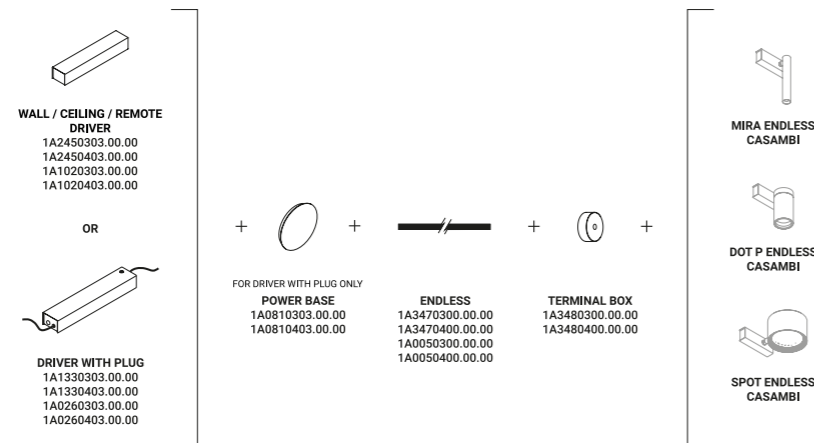

**ENDLESS conductive tape**  
used with voltage/current  
other than 48V DC

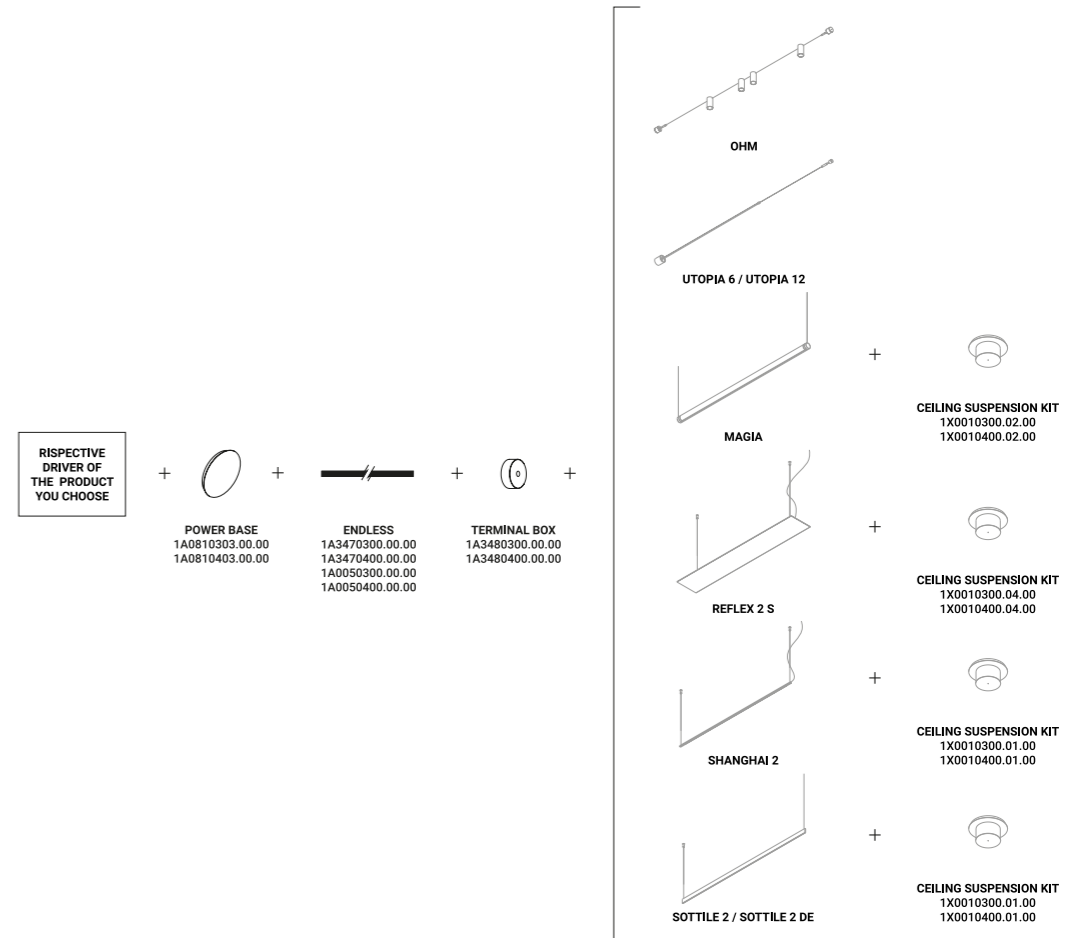


Davide Groppi / 2018

Systems / Direct-Indirect-Diffuse / Indoor

**Material** Metal  
**Finish** .00 Standard

**Note** System consisting of a conductive adhesive tape to apply to surfaces.  
 Possibility to connect several lamps (Max 48V DC - Max 150W - Max 4A).

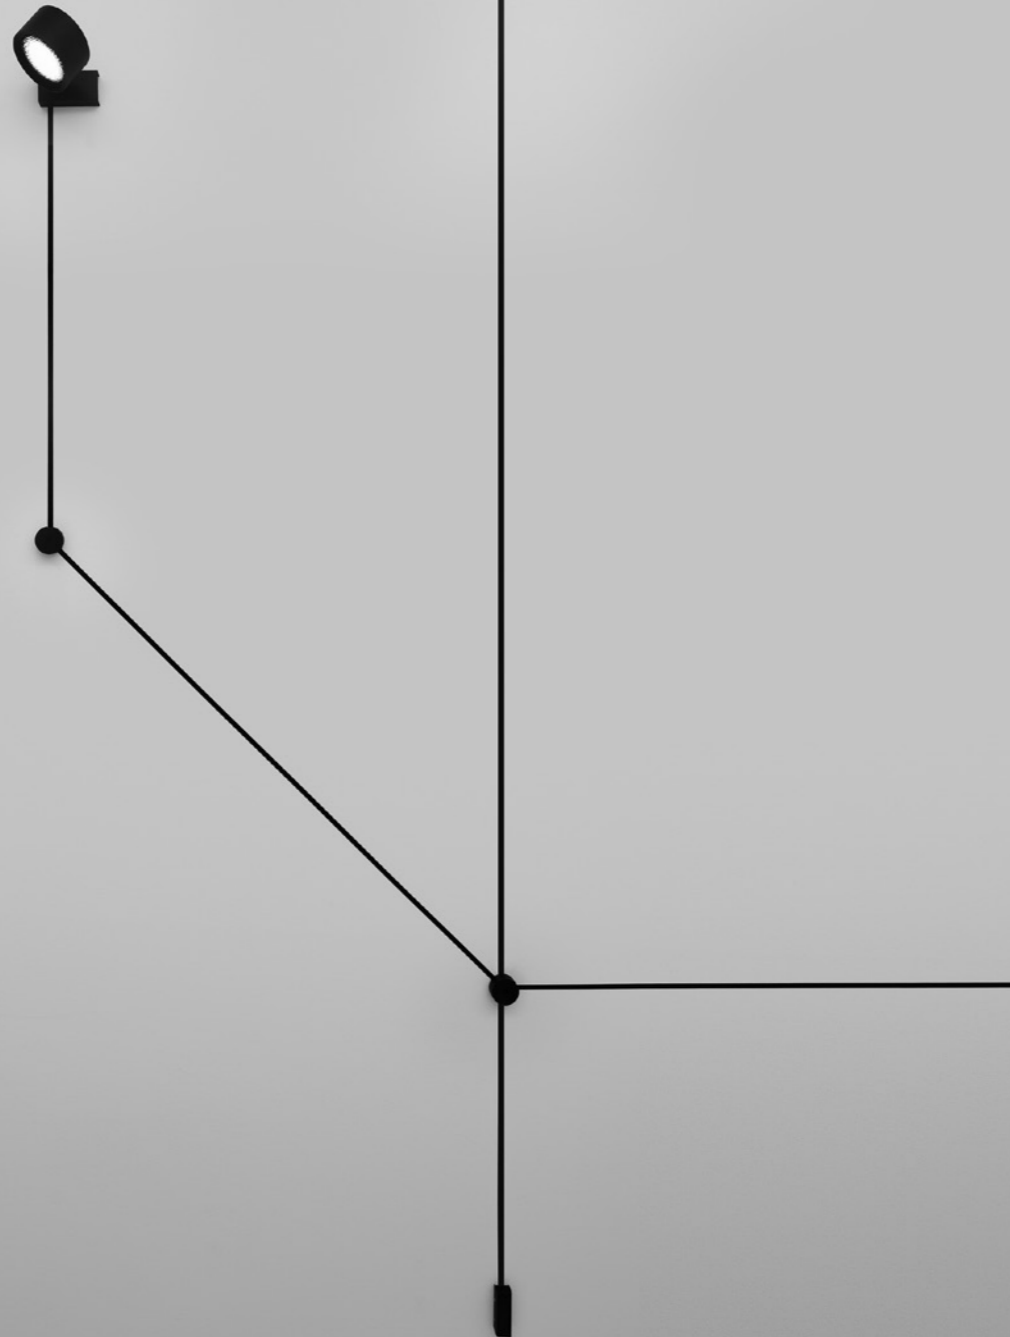

**Compulsory accessories**

Installation kits



<b>Strip Endless - 196.85"</b>		Not included
Matt White	Output 48V - Max 150W - Max 4A	1A3470300.00.00
Matt Black	Output 48V - Max 150W - Max 4A	1A3470400.00.00




<b>Strip Endless - 393.70"</b>		Not included
Matt White	Output 48V - Max 150W - Max 4A	1A0050300.00.00
Matt Black	Output 48V - Max 150W - Max 4A	1A0050400.00.00




<b>Fixing rough walls kit</b>		Not included
	Length 98.42"	1A0370000.00.00



<b>Terminal box</b>		Not included
Matt White	2 Terminals included	1A3480300.00.00
Matt Black	2 Terminals included	1A3480400.00.00



<b>Power base</b>		Not included
Matt White		1A0030300.00.00
Matt Black		1A0030400.00.00



<b>Power base for Endless</b>		Not included
Matt White		1A0810303.00.00
Matt Black		1A0810403.00.00




<b>Terminals</b>		Not included
	2 Pieces	1A3490000.00.00




**Compulsory accessories**


Drivers for ENDLESS ON/OFF system and CASAMBI




Driver with plug		Not included
Matt White	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A1330303.00.00
Matt Black	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A1330403.00.00



Wall/ceiling/remote driver		Not included
Matt White	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A2450303.00.00
Matt Black	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A2450403.00.00




Driver with plug		Not included
Matt White	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - ON/OFF	1A0260303.00.00
Matt Black	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - ON/OFF	1A0260403.00.00




Wall/ceiling/remote driver		Not included
Matt White	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - ON/OFF	1A1020303.00.00
Matt Black	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - ON/OFF	1A1020403.00.00

**Compulsory accessories**


Drivers for ENDLESS dimmable system




Driver with plug		Not included
Matt White	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - Dimmer on board	1A1340303.00.06
Matt Black	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - Dimmer on board	1A1340403.00.06



Wall/ceiling/remote driver		Not included
Matt White	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090303.00.07
Matt Black	Input 120V - 60Hz Output 48V - 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090403.00.07



Driver with plug		Not included
Matt White	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - Dimmer on board	1A1800303.00.06
Matt Black	Input 120V - 60Hz Output 48V - 90W - Max 1,875A IP20 - Dimmer on board	1A1800403.00.06



Wall/ceiling driver		Not included
Matt White	Input 120V - 50/60Hz Output 48V - 90W - Max 1,875A IP20 - DALI - PUSH - 1-10V	1A1810303.00.07
Matt Black	Input 120V - 50/60Hz Output 48V - 90W - Max 1,875A IP20 - DALI - PUSH - 1-10V	1A1810403.00.07




Davide Groppi / 2018


**ENDLESS**

**Compulsory accessories**


Remote drivers for ENDLESS




<b>Driver</b>			Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640	




<b>Driver</b>			Not included
100-240V	48V/90W/IP20/1-10V	1Z1120290	




<b>Controller</b>			Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	1Z2170020	

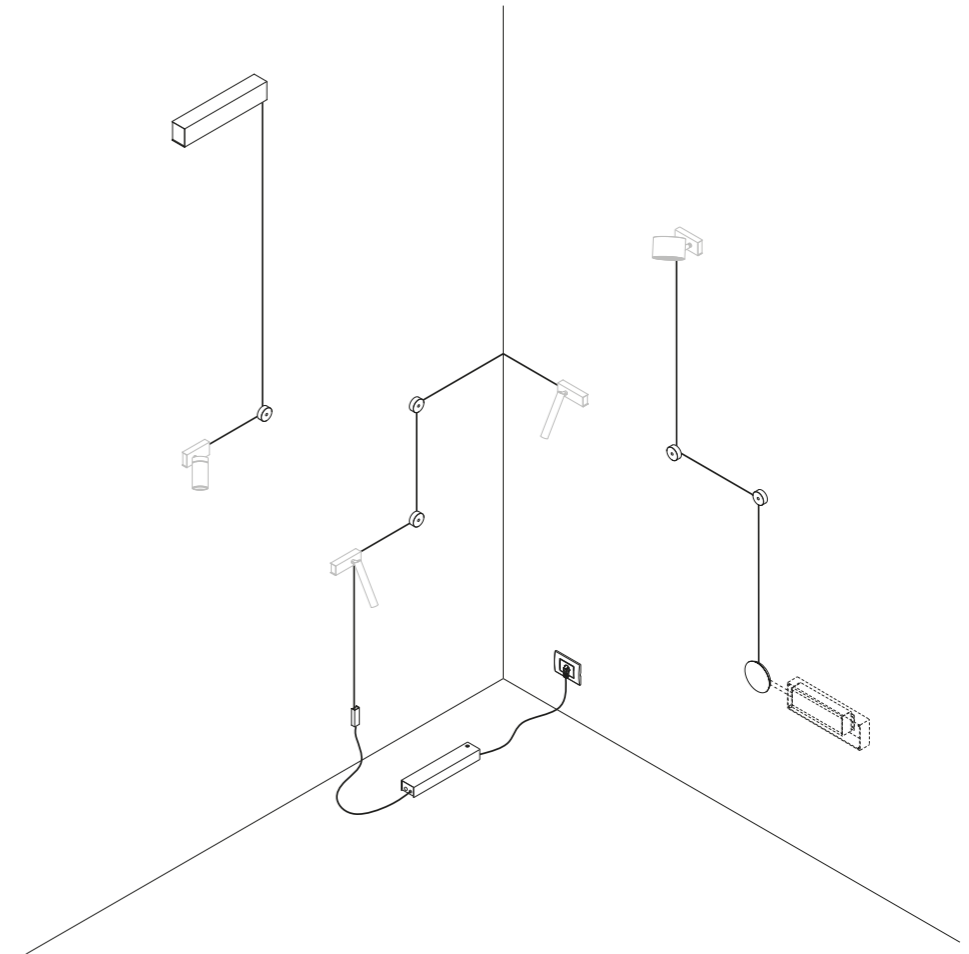


Examples of installation with the three different power supply modes

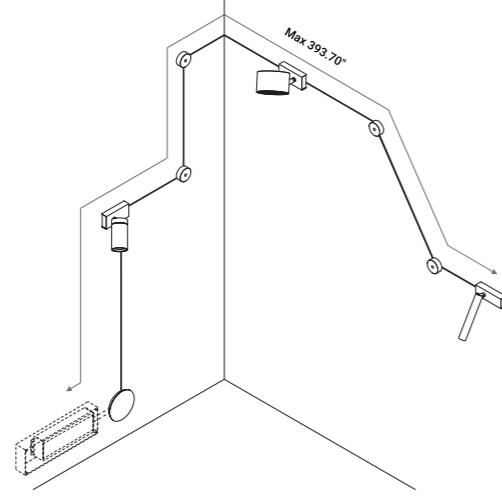


Example of combined installation between various devices with remote driver

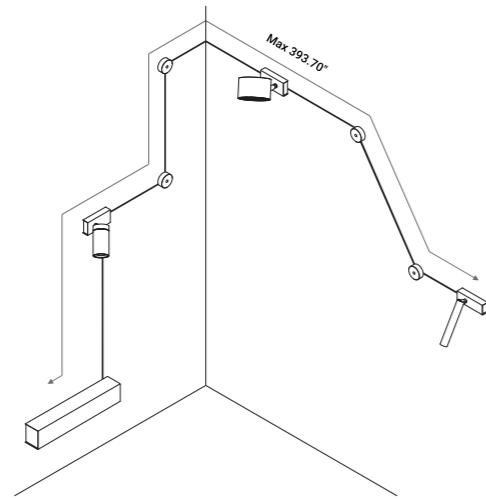


Example of combined installation between various devices with wall/ceiling driver

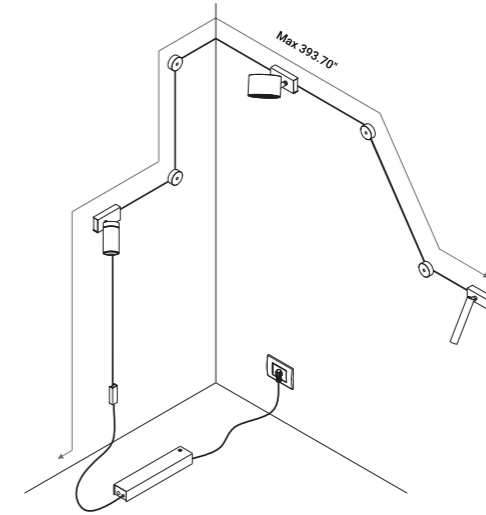

Example of combined installation between various devices with driver with plug

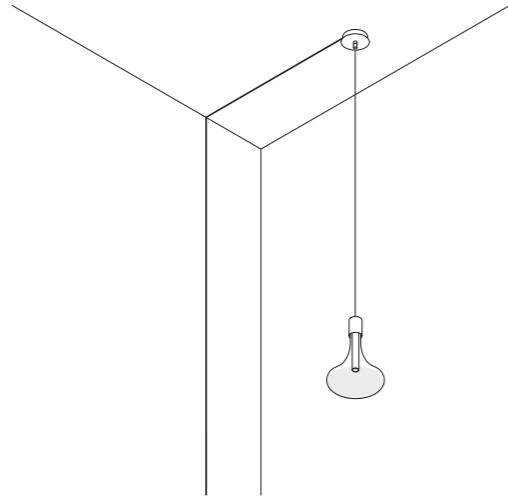


CATHODE: example of installation

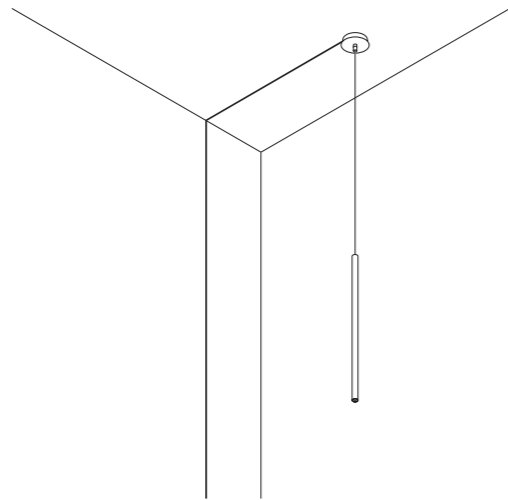


MISS: example of installation




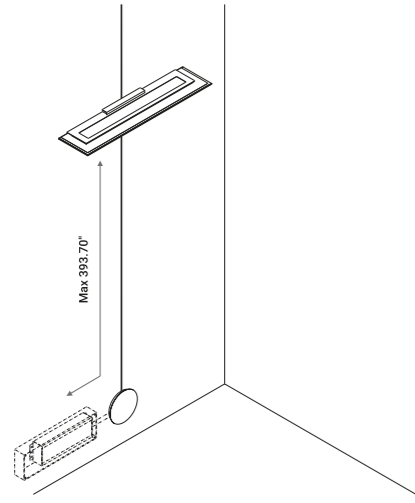


REFLEX: example of installation with remote driver

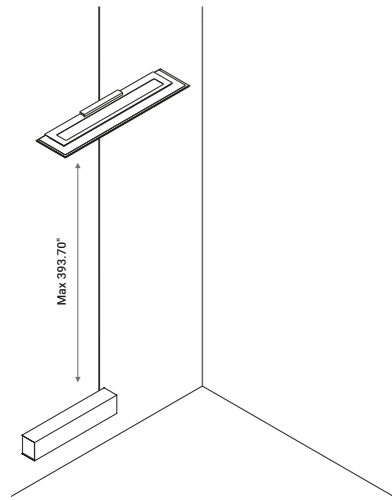


REFLEX: example of installation with wall/ceiling driver

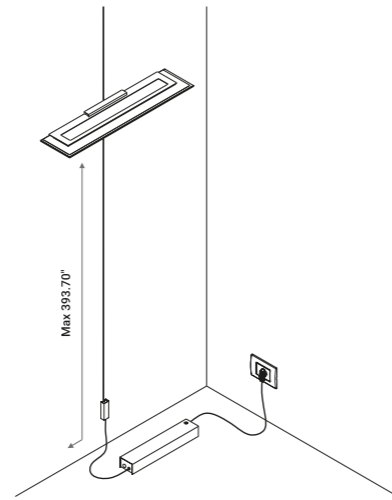


REFLEX: example of installation with driver with plug

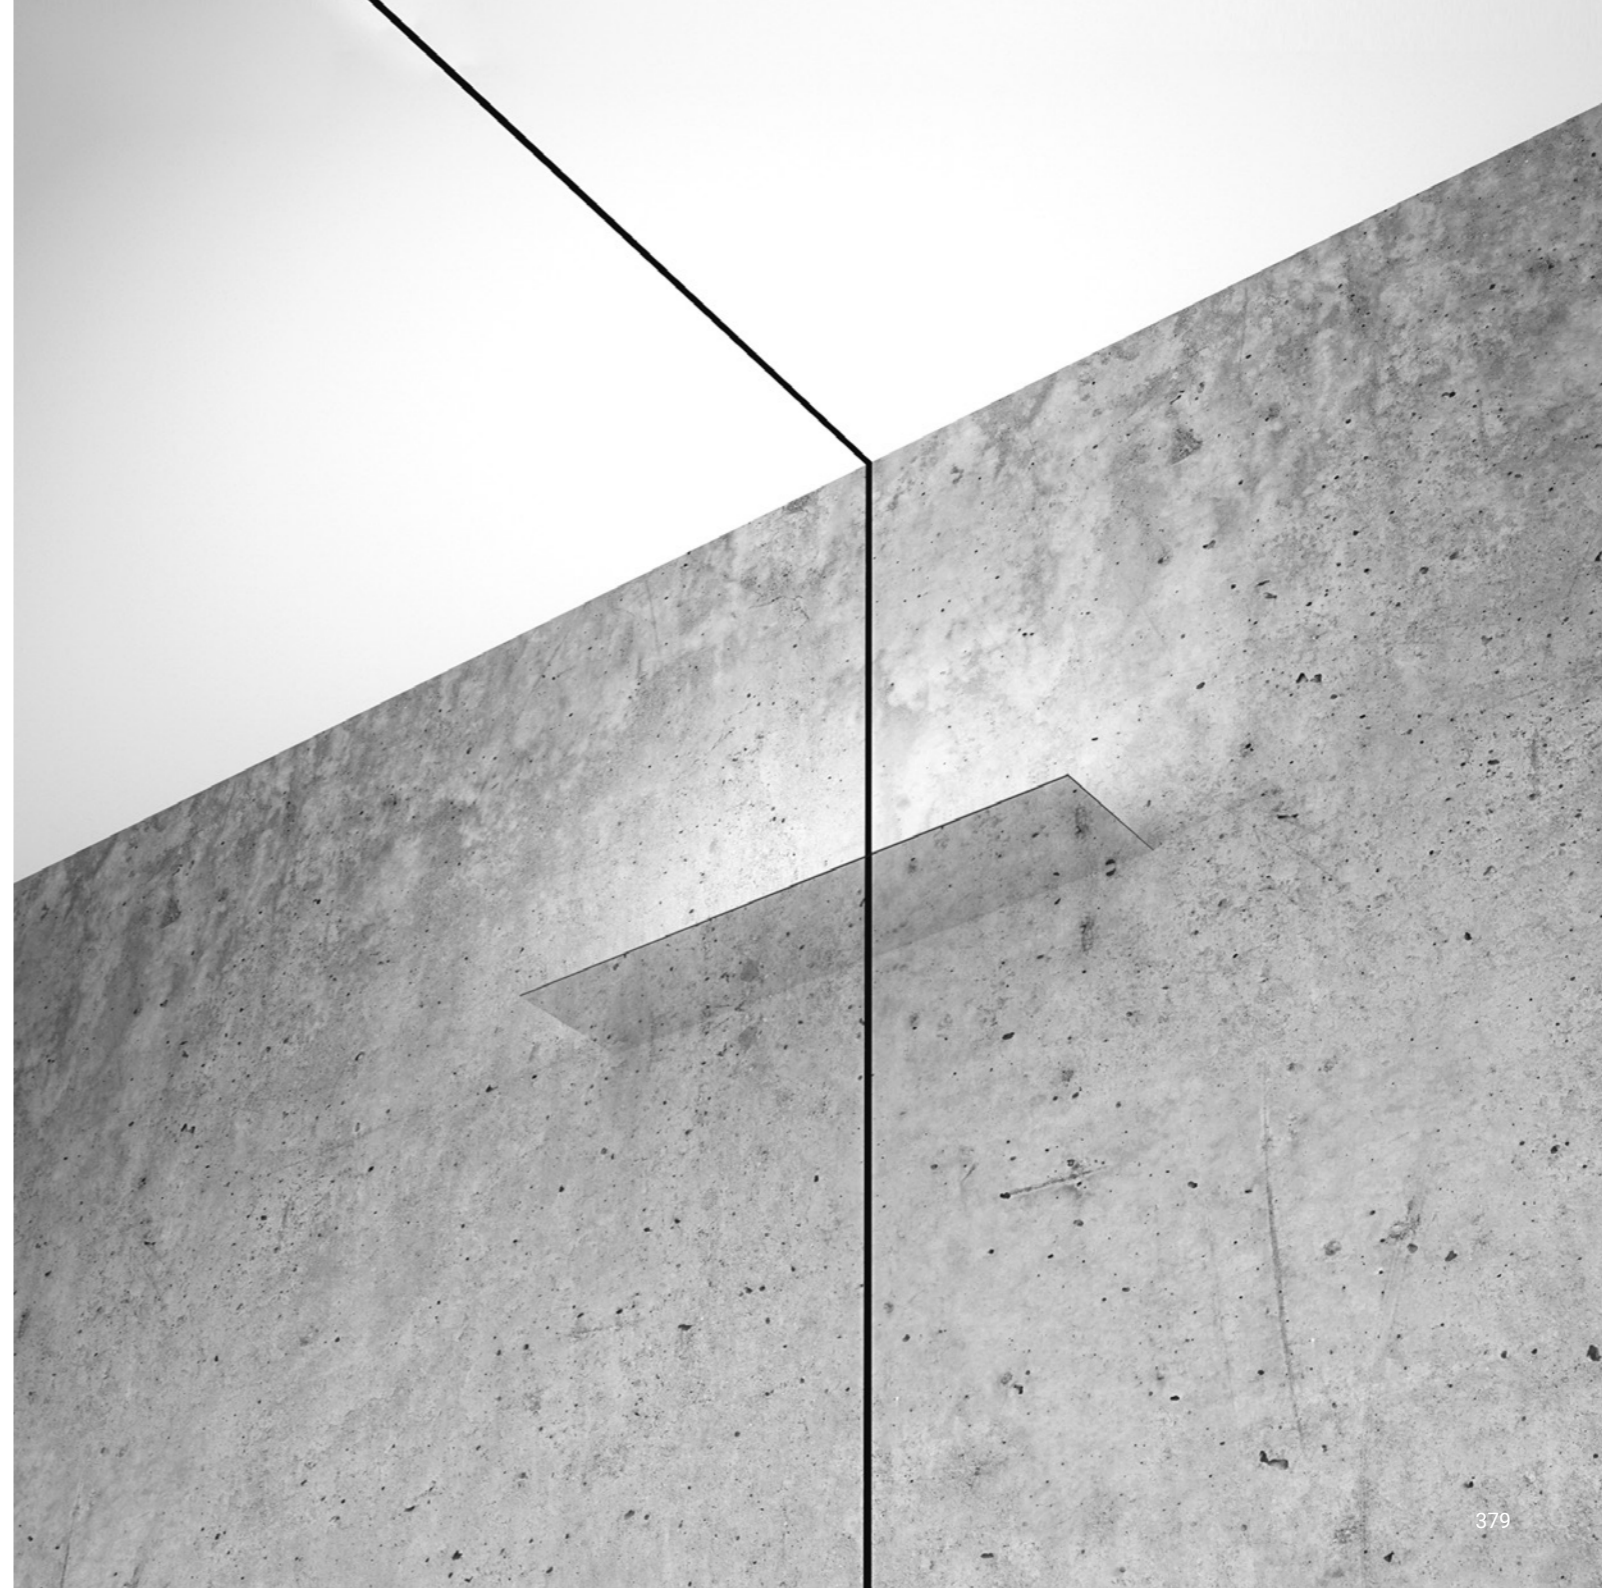


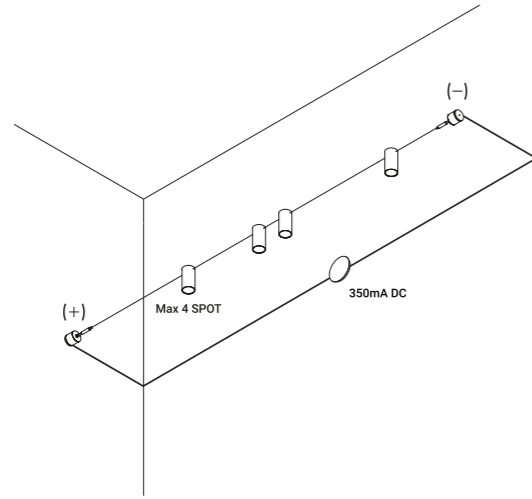

OHM: example of installation

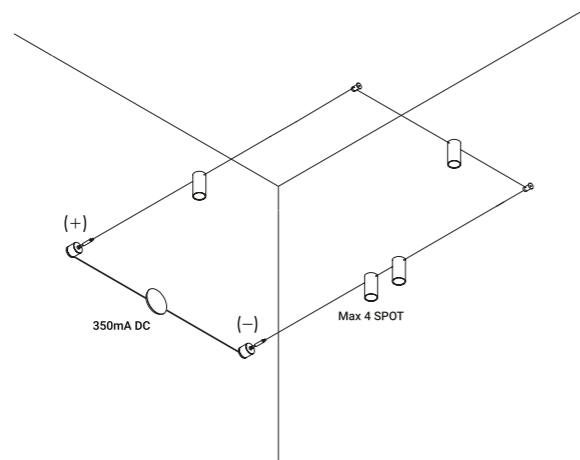


OHM: example of installation

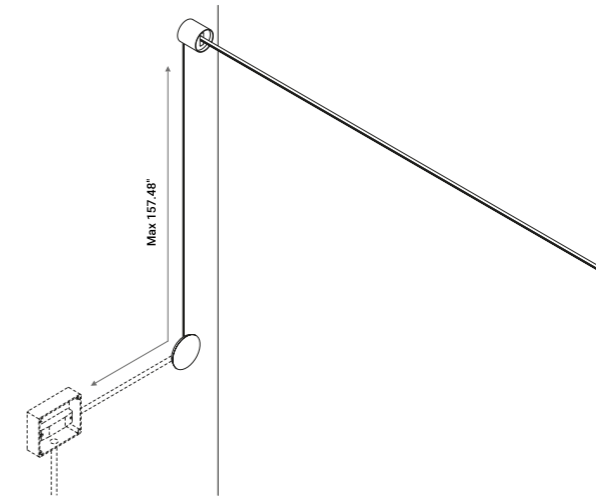

UTOPIA: example of installation

1X001XX00.02.00 - 1X001XX00.04.00  
Ceiling suspension kit  
+  
1X0050300.01.00  
Wall back plate

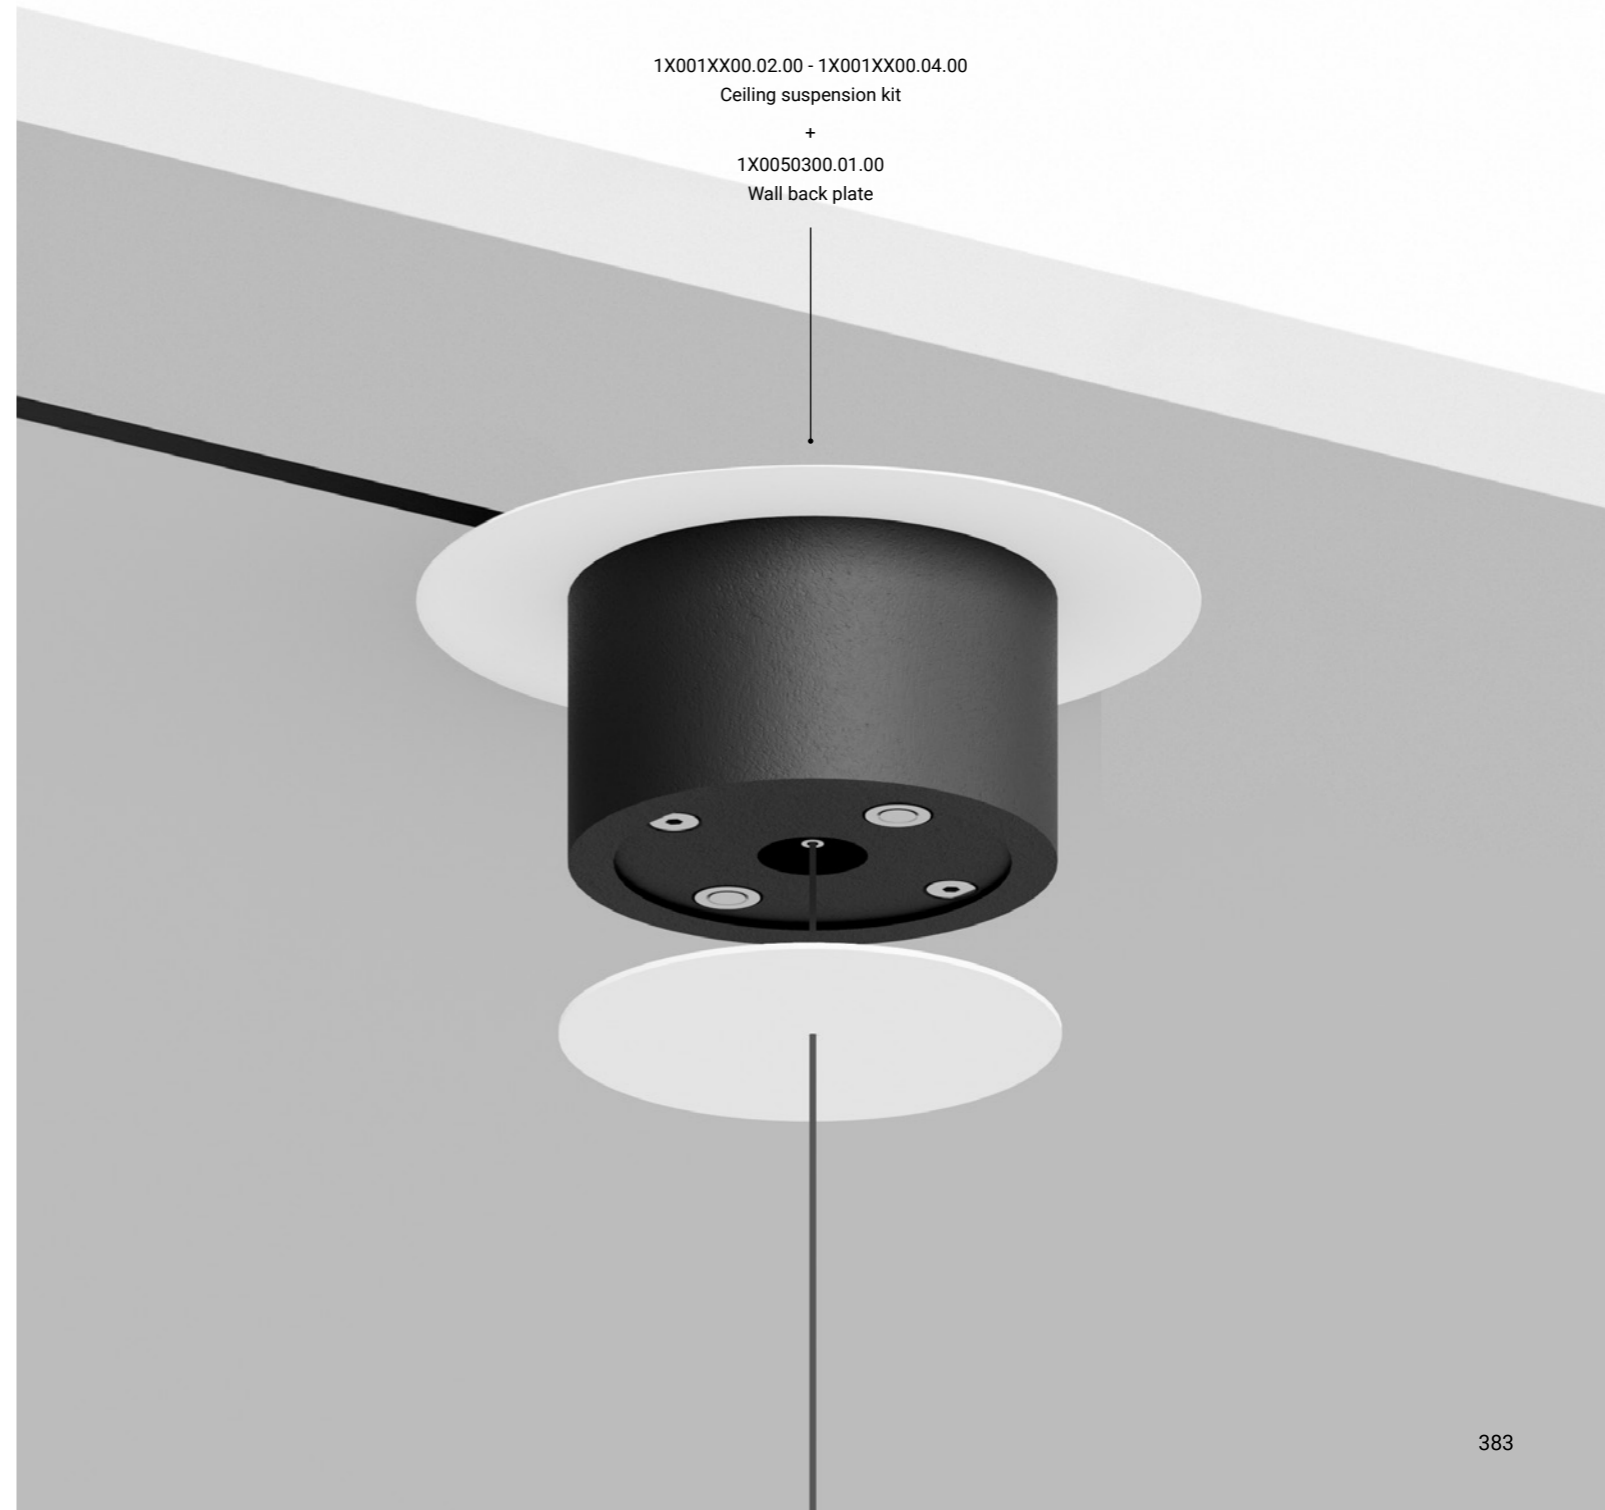






## FLASH


Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.  
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length  
(standard versions at 6 / 12 / 18 metres in length).  
The ideal solution for direct illumination of spaces with very high ceilings.  
Its name pays homage to the famous comic book superhero,  
who can run seven times the speed of light.


How to order - FLASH 6

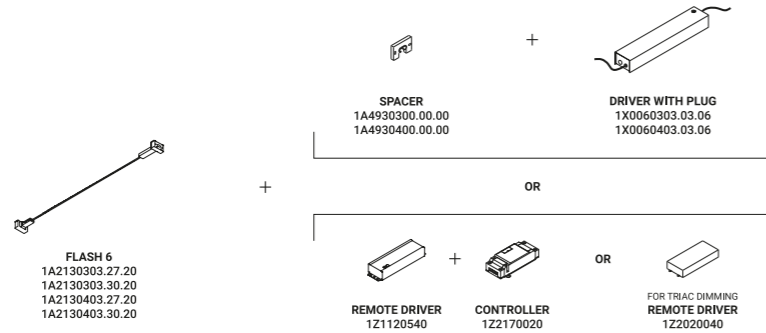

How to order - FLASH 12

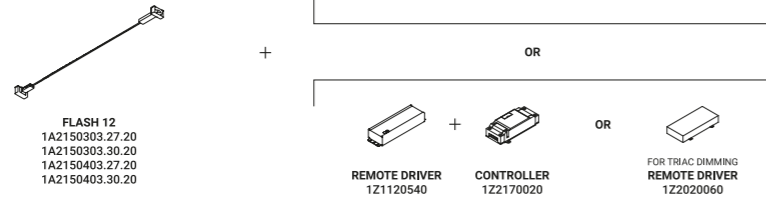

How to order - FLASH 18

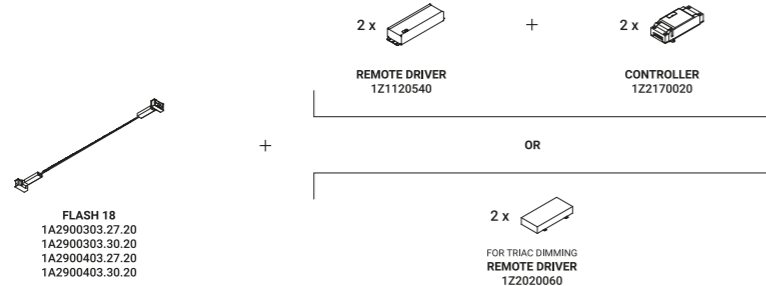

Wall-Systems / Direct / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Special stainless steel tape (0.39") running from wall to wall. Available in 236.22" / 472.44" / 708.66" with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW - 196.85" / 393.70") versions. LED strip that can be divided every 1.90". DE versions are available with dual on/off (two drivers required).

**FLASH 6**  
Max 45W  
24V DC  
2700K - 5592lm / 3000K - 5700lm  
CRI >90  
Driver not included  
UL LISTED

Matt White - 2700K	1A2130303.27.20
Matt White - 3000K	1A2130303.30.20
Matt Black - 2700K	1A2130403.27.20
Matt Black - 3000K	1A2130403.30.20


**FLASH 12**  
Max 90W  
24V DC  
2700K - 11184lm / 3000K - 11400lm  
CRI >90  
Driver not included  
UL LISTED

Matt White - 2700K	1A2150303.27.20
Matt White - 3000K	1A2150303.30.20
Matt Black - 2700K	1A2150403.27.20
Matt Black - 3000K	1A2150403.30.20

**FLASH 18**  
Max 135W  
24V DC  
2700K - 16758lm / 3000K - 20124lm  
CRI >90  
Driver not included

Matt White - 2700K	1A2900303.27.20
Matt White - 3000K	1A2900303.30.20
Matt Black - 2700K	1A2900403.27.20
Matt Black - 3000K	1A2900403.30.20

How to order -  
FLASH 6 DE



FLASH 6 DE  
1A1290303.27.20  
1A1290303.30.20  
1A1290403.27.20  
1A1290403.30.20


+




OR



+




OR



How to order -  
FLASH 12 DE



FLASH 12 DE  
1A1300303.27.20  
1A1300303.30.20  
1A1300403.27.20  
1A1300403.30.20




**FLASH 6 DE**

Dual emission  
Max 90W  
24V DC  
2700K - Up 5592lm - Down 5592lm /  
3000K - Up 5700lm - Down 5700lm  
CRI >90  
Driver not included

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1290303.27.20  
1A1290303.30.20  
1A1290403.27.20  
1A1290403.30.20

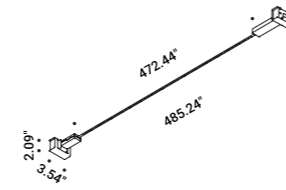


**FLASH 12 DE**

Dual emission  
Max 180W  
24V DC  
2700K - Up 11184lm - Down 11184lm /  
3000K - Up 11400lm - Down 11400lm  
CRI >90  
Driver not included


Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1300303.27.20  
1A1300303.30.20  
1A1300403.27.20  
1A1300403.30.20


How to order -  
FLASH 5 TW

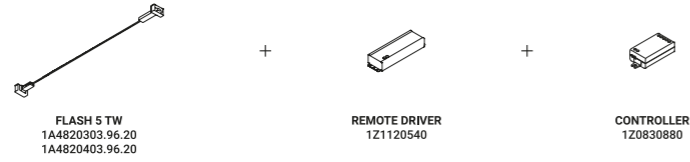

How to order -  
FLASH 10 TW

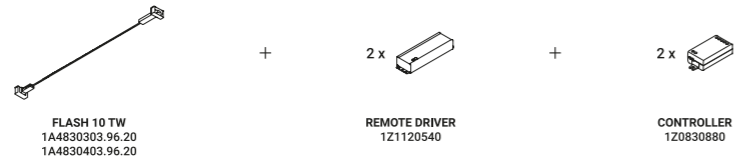


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

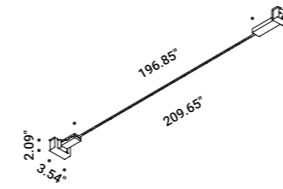

**FLASH 5 TW**  
Tunable White  
Max 50W  
24V DC  
2700K / 6500K - 7650lm  
CRI >90  
Driver not included

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4820303.96.20  
1A4820403.96.20




**FLASH 10 TW**  
Tunable White  
Max 100W  
24V DC  
2700K / 6500K - 15300lm  
CRI >90  
Driver not included


Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4830303.96.20  
1A4830403.96.20


How to order -  
FLASH 5 DE TW

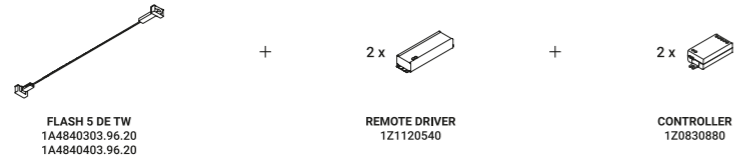

How to order -  
FLASH 10 DE TW

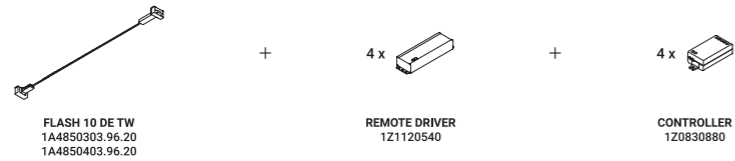


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

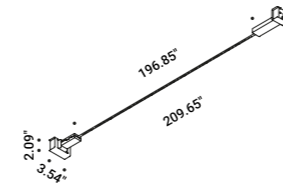

**FLASH 5 DE TW**  
Dual emission - Tunable White  
Max 100W  
24V DC  
2700K / 6500K - 15300lm  
CRI >90  
Driver not included

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4840303.96.20  
1A4840403.96.20




**FLASH 10 DE TW**  
Dual emission - Tunable White  
Max 200W  
24V DC  
2700K / 6500K - 30600lm  
CRI >90  
Driver not included

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K


1A4850303.96.20  
1A4850403.96.20

## Compulsory accessories


## Drivers




Driver with plug		Not included	
Matt White	Input 120V - 60Hz Output 24V - Max 90W - IP20 Dimmer on board	FLASH 6 / FLASH 12	1X0060303.03.06
Matt Black	Input 120V - 60Hz Output 24V - Max 90W - IP20 Dimmer on board	FLASH 6 / FLASH 12	1X0060403.03.06




Driver		Not included	
120-277V	24V/60W/IP20/TRIAC - 1-10V	FLASH 6 / FLASH 6 DE	1Z2020040




Driver		Not included	
120-277V	24V/96W/IP20/TRIAC - 1-10V	FLASH 12 / FLASH 18 / FLASH 12 DE	1Z2020060



Driver		Not included	
100-240V	24V/96W/IP67/1-10V		1Z1120540



Controller		Not included	
Matt Black	DALI - PUSH - 0/1-10V - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE	1Z2170020



Controller Casambi - Tunable white		Not included	
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z0830880

## Optional accessories


## Installation kits




Spacer		Not included	
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00




Wall and ceiling rose		Not included	
Matt White			1A3440303.00.00
Matt Black			1A3440403.00.00




Ceiling installation kit		Not included	
Matt Black			1A0080400.00.00




Kit wall connection vertical sloped 45°		Not included	
Matt Black			1A0120400.00.00



Kit wall connection sloped right 75°		Not included	
Matt Black			1A0340400.00.00




Kit wall connection sloped left 75°		Not included	
Matt Black			1A0350400.00.00




Wall back plate		Not included	
Matt White			1X0090300.01.00
Matt Black			1X0090400.01.00




Swallows		Not included	
Matt Black			1A0800400.00.00

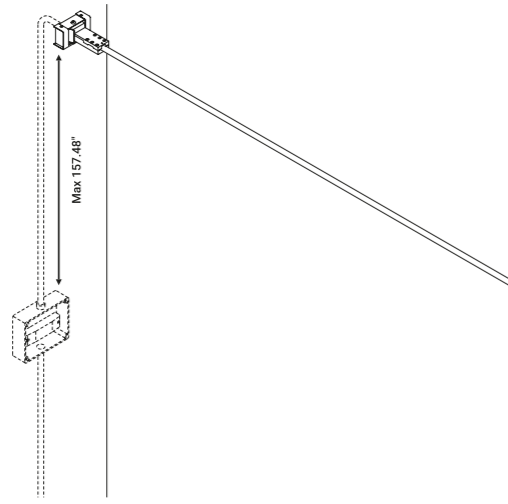


Example of installation with remote driver

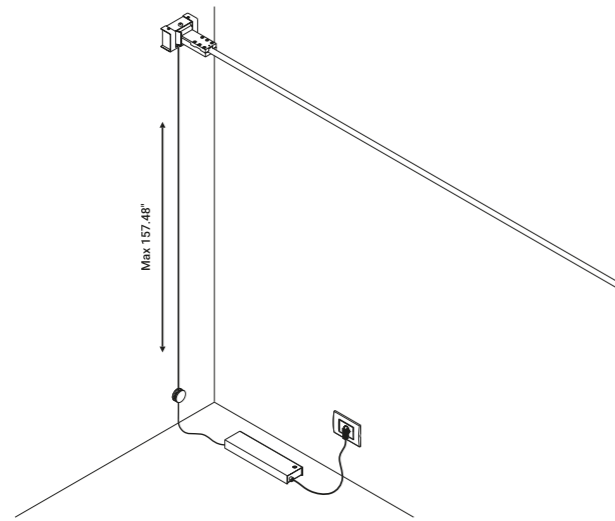


Example of installation with driver with plug

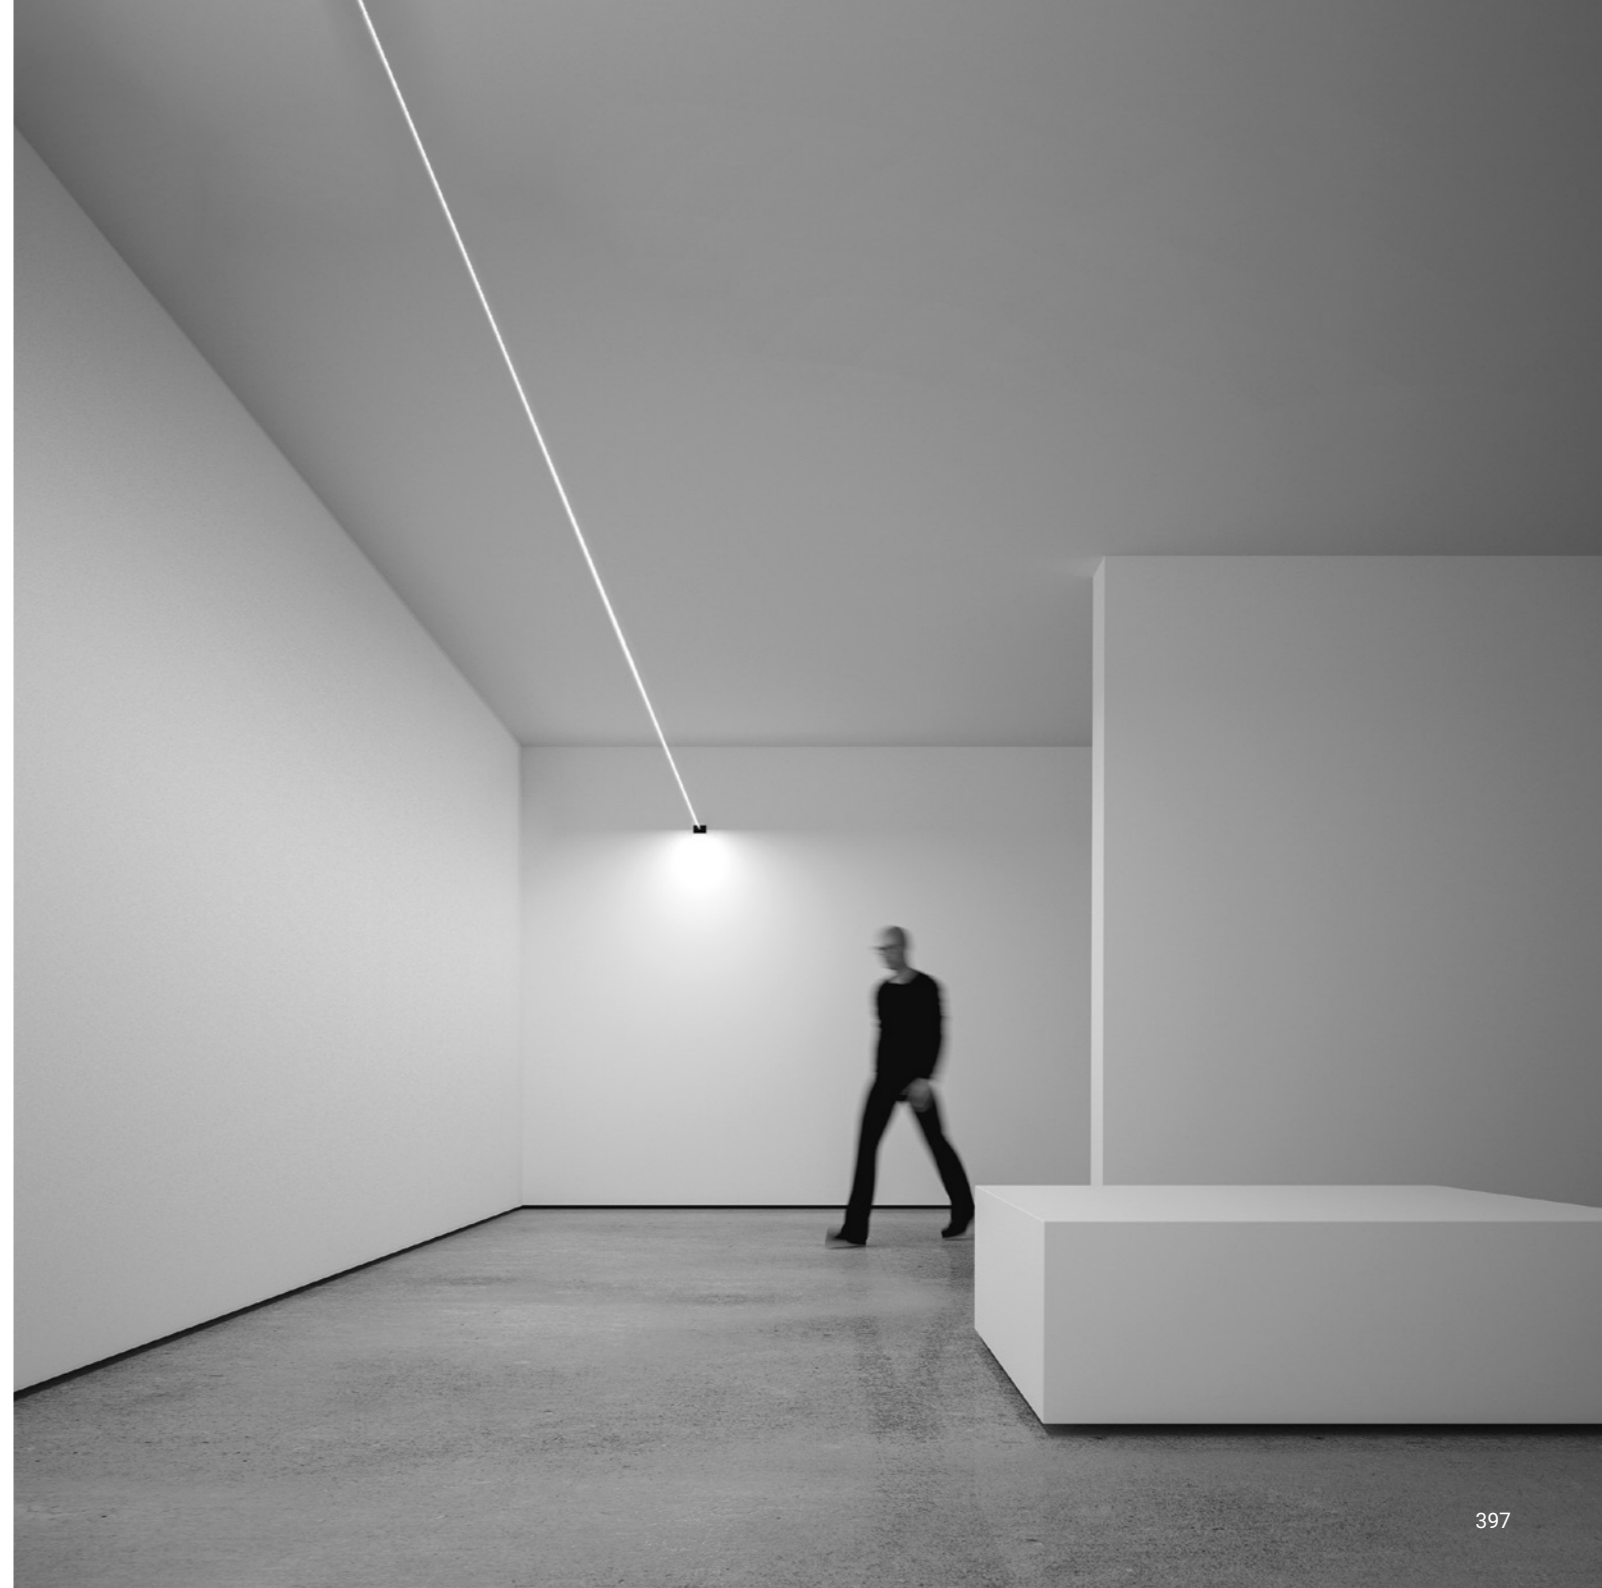


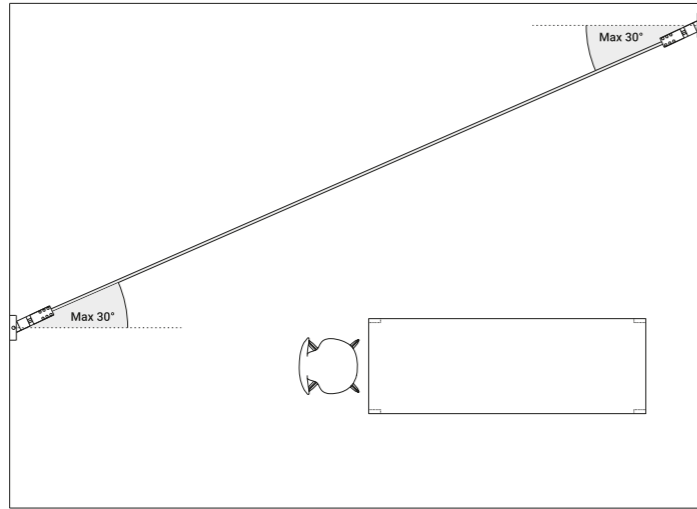


Example of installation with max rotation 30°

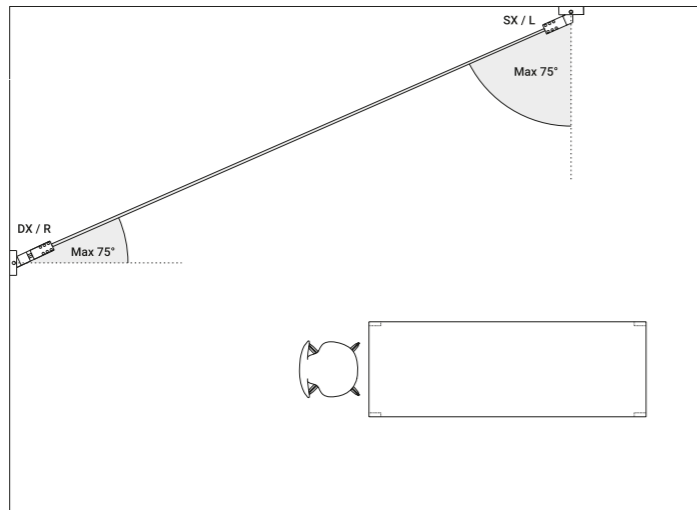

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

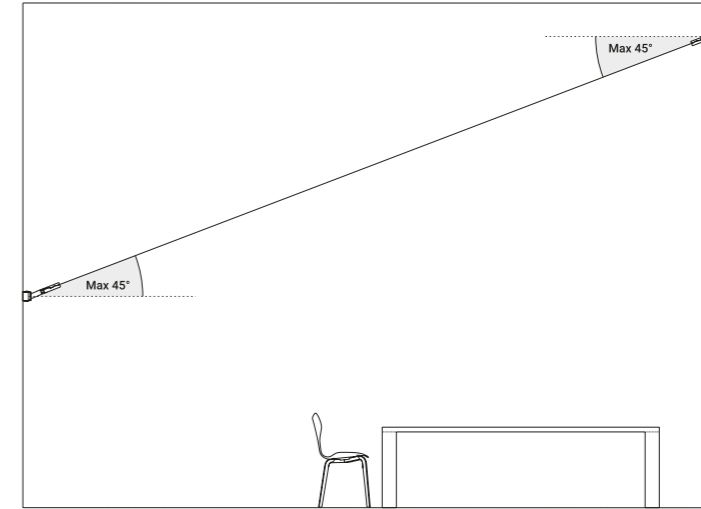

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

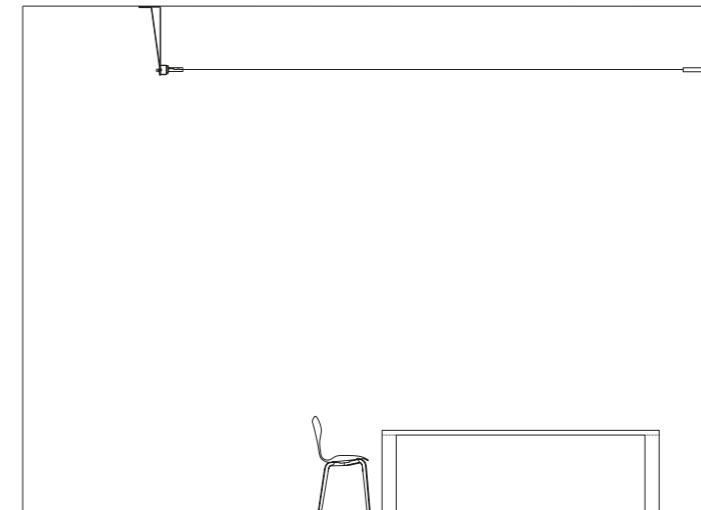

1A0080400.00.00 - Example of installation with ceiling installation kit





## INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.


An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor. It comes in strips up to 36 metres in length (standard versions at 6 / 12 metres in length). Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.

This project pays homage to the art of Lucio Fontana and his spatial concepts. The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.


**Archiproducts Design Award 2017**

**People's Choice AZ Award 2017**


How to order - INFINITO 6

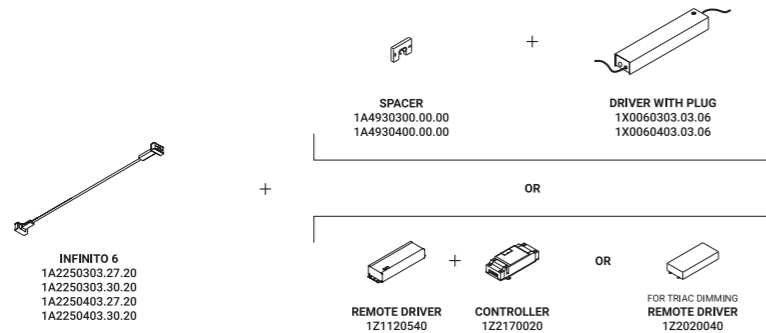

How to order - INFINITO 12

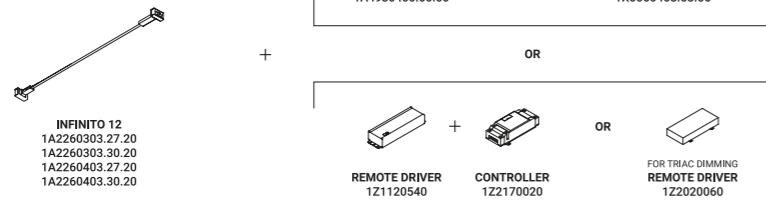

How to order - INFINITO 18

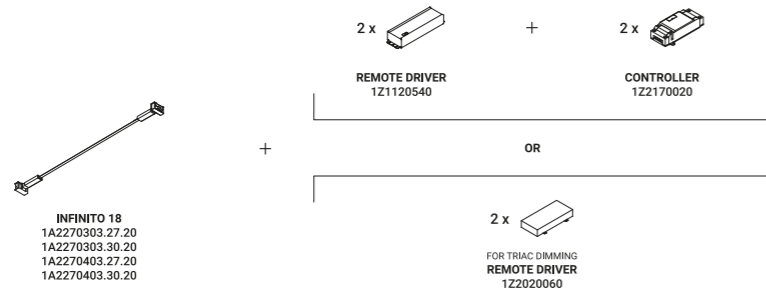

Wall-Systems / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Special stainless steel tape (0.75") stretched from wall to wall. Available in 236.22" / 472.44" / 708.66" with a single power unit and uniform lighting. Available in Tunable White (TW - 196.85" / 393.70") version. LED strip that can be divided every 1.90".

**INFINITO 6**  
Max 45W  
24V DC  
2700K - 5592lm / 3000K - 5700lm  
CRI >90  
Driver not included  
UL LISTED

Matt White - 2700K	1A2250303.27.20
Matt White - 3000K	1A2250303.30.20
Matt Black - 2700K	1A2250403.27.20
Matt Black - 3000K	1A2250403.30.20

**INFINITO 12**  
Max 90W  
24V DC  
2700K - 11184lm / 3000K - 11400lm  
CRI >90  
Driver not included  
UL LISTED

Matt White - 2700K	1A2260303.27.20
Matt White - 3000K	1A2260303.30.20
Matt Black - 2700K	1A2260403.27.20
Matt Black - 3000K	1A2260403.30.20

**INFINITO 18**  
Max 135W  
24V DC  
2700K - 16758lm / 3000K - 20124lm  
CRI >90  
Driver not included

Matt White - 2700K	1A2270303.27.20
Matt White - 3000K	1A2270303.30.20
Matt Black - 2700K	1A2270403.27.20
Matt Black - 3000K	1A2270403.30.20

How to order -  
INFINITO 5 TW



INFINITO 5 TW  
1A4860303.96.20  
1A4860403.96.20

+



REMOTE DRIVER  
1Z1120540

+



CONTROLLER  
1Z0830880

How to order -  
INFINITO 10 TW



INFINITO 10 TW  
1A4870303.96.20  
1A4870403.96.20

+



2 x

REMOTE DRIVER  
1Z1120540


+



2 x

CONTROLLER  
1Z0830880

**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.



**INFINITO 5 TW**

Tunable White

Max 50W

24V DC

2700K / 6500K - 7650lm

CRI >90


Driver not included

Matt White - 2700K / 6500K

Matt Black - 2700K / 6500K

1A4860303.96.20

1A4860403.96.20



**INFINITO 10 TW**

Tunable White

Max 100W

24V DC

2700K / 6500K - 15300lm

CRI >90

Driver not included

Matt White - 2700K / 6500K








Matt Black - 2700K / 6500K

1A4870303.96.20

1A4870403.96.20









Compulsory accessories


Drivers

<b>Driver</b> <span style="float:right">Not included</span>			
	100-240V	24V/96W/IP67/1-10V	1Z1120540
<b>Controller</b> <span style="float:right">Not included</span>			
	Matt Black	DALI - PUSH - 0/1-10V - IP20	INFINITO 6 / INFINITO 12 / 1Z2170020 INFINITO 18
<b>Driver</b> <span style="float:right">Not included</span>			
	120-277V	24V/60W/IP20/TRIAC - 1-10V	INFINITO 6 1Z2020040
<b>Driver with plug</b> <span style="float:right">Not included</span>			
	Matt White	Input 120V - 60Hz Output 24V - Max 90W - IP20 Dimmer on board	INFINITO 6 / INFINITO 12 1X0060303.03.06
	Matt Black	Input 120V - 60Hz Output 24V - Max 90W - IP20 Dimmer on board	INFINITO 6 / INFINITO 12 1X0060403.03.06
<b>Controller Casambi - Tunable white</b> <span style="float:right">Not included</span>			
			INFINITO 5 TW / 1Z0830880 INFINITO 10 TW
<b>Driver</b> <span style="float:right">Not included</span>			
	120-277V	24V/96W/IP20/TRIAC - 1-10V	INFINITO 12 / INFINITO 18 1Z2020060


Optional accessories

Installation kits

<b>Spacer</b> <span style="float:right">Not included</span>			
	Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12 1A4930300.00.00
	Matt Black	For driver kit with plug	INFINITO 6 / INFINITO 12 1A4930400.00.00
<b>Wall and ceiling rose</b> <span style="float:right">Not included</span>			
	Matt White		1A3440303.00.00
	Matt Black		1A3440403.00.00
<b>Ceiling installation kit</b> <span style="float:right">Not included</span>			
	Matt Black		1A0080400.00.00
<b>Kit wall connection vertical sloped 45°</b> <span style="float:right">Not included</span>			
	Matt Black		1A0120400.00.00
<b>Kit wall connection sloped right 75°</b> <span style="float:right">Not included</span>			
	Matt Black		1A0340400.00.00
<b>Kit wall connection sloped left 75°</b> <span style="float:right">Not included</span>			
	Matt Black		1A0350400.00.00
<b>Wall back plate</b> <span style="float:right">Not included</span>			
	Matt White		1X0090300.01.00
	Matt Black		1X0090400.01.00
<b>Swallows</b> <span style="float:right">Not included</span>			
	Matt Black		1A0290400.00.00

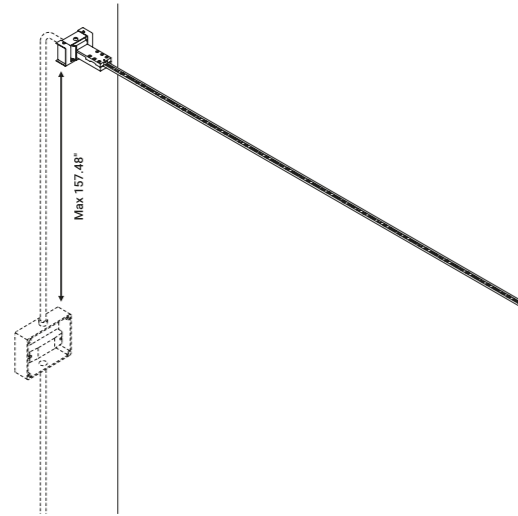


Example of installation with remote driver

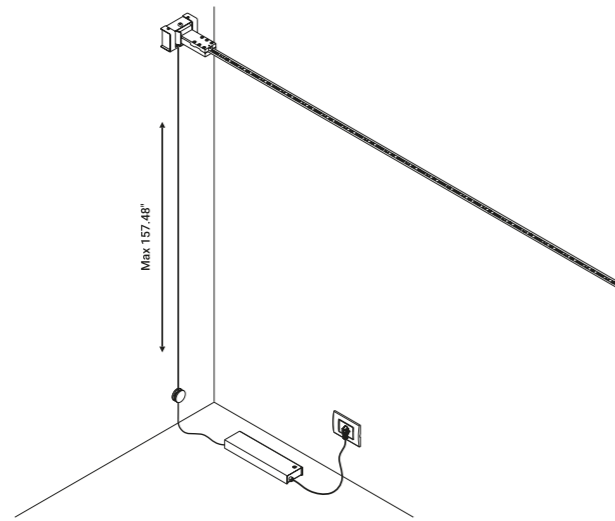


Example of installation with driver with plug




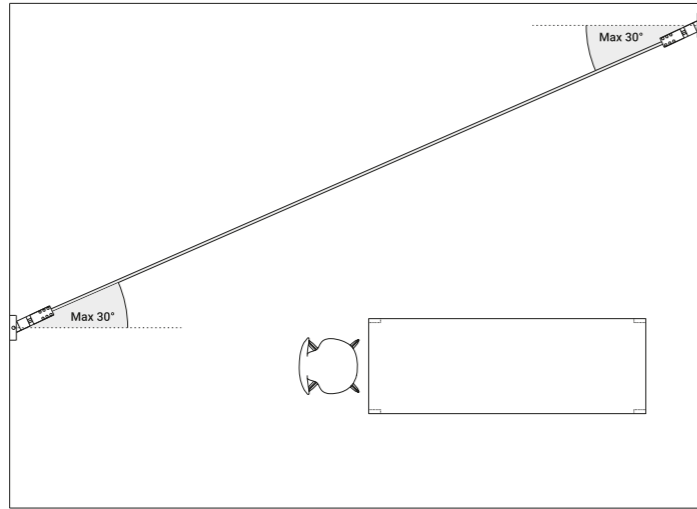


Example of installation with max rotation 30°

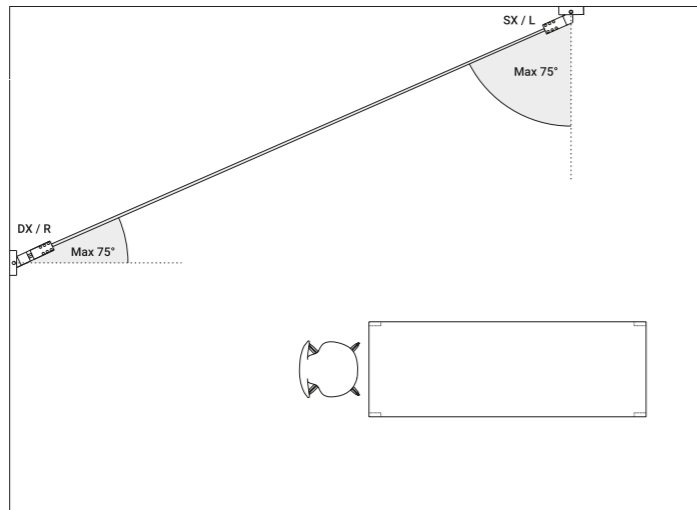


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

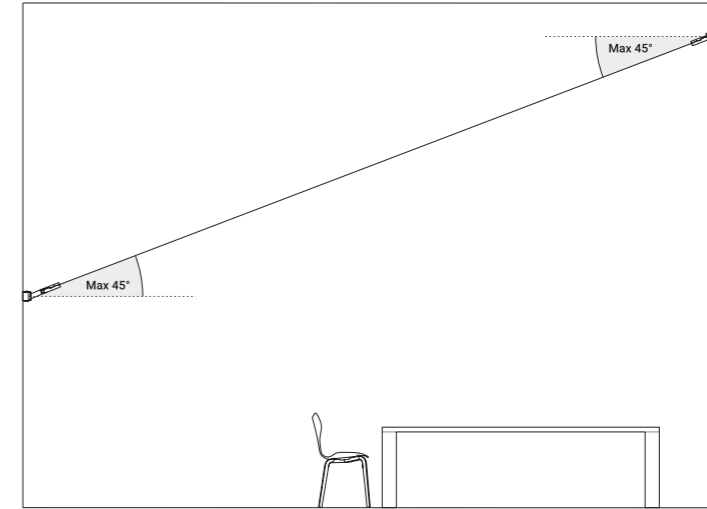

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

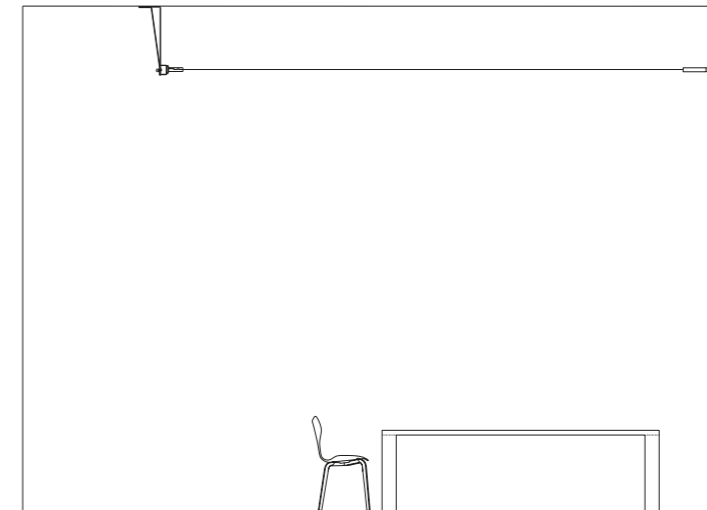

1A0080400.00.00 - Example of installation with ceiling installation kit

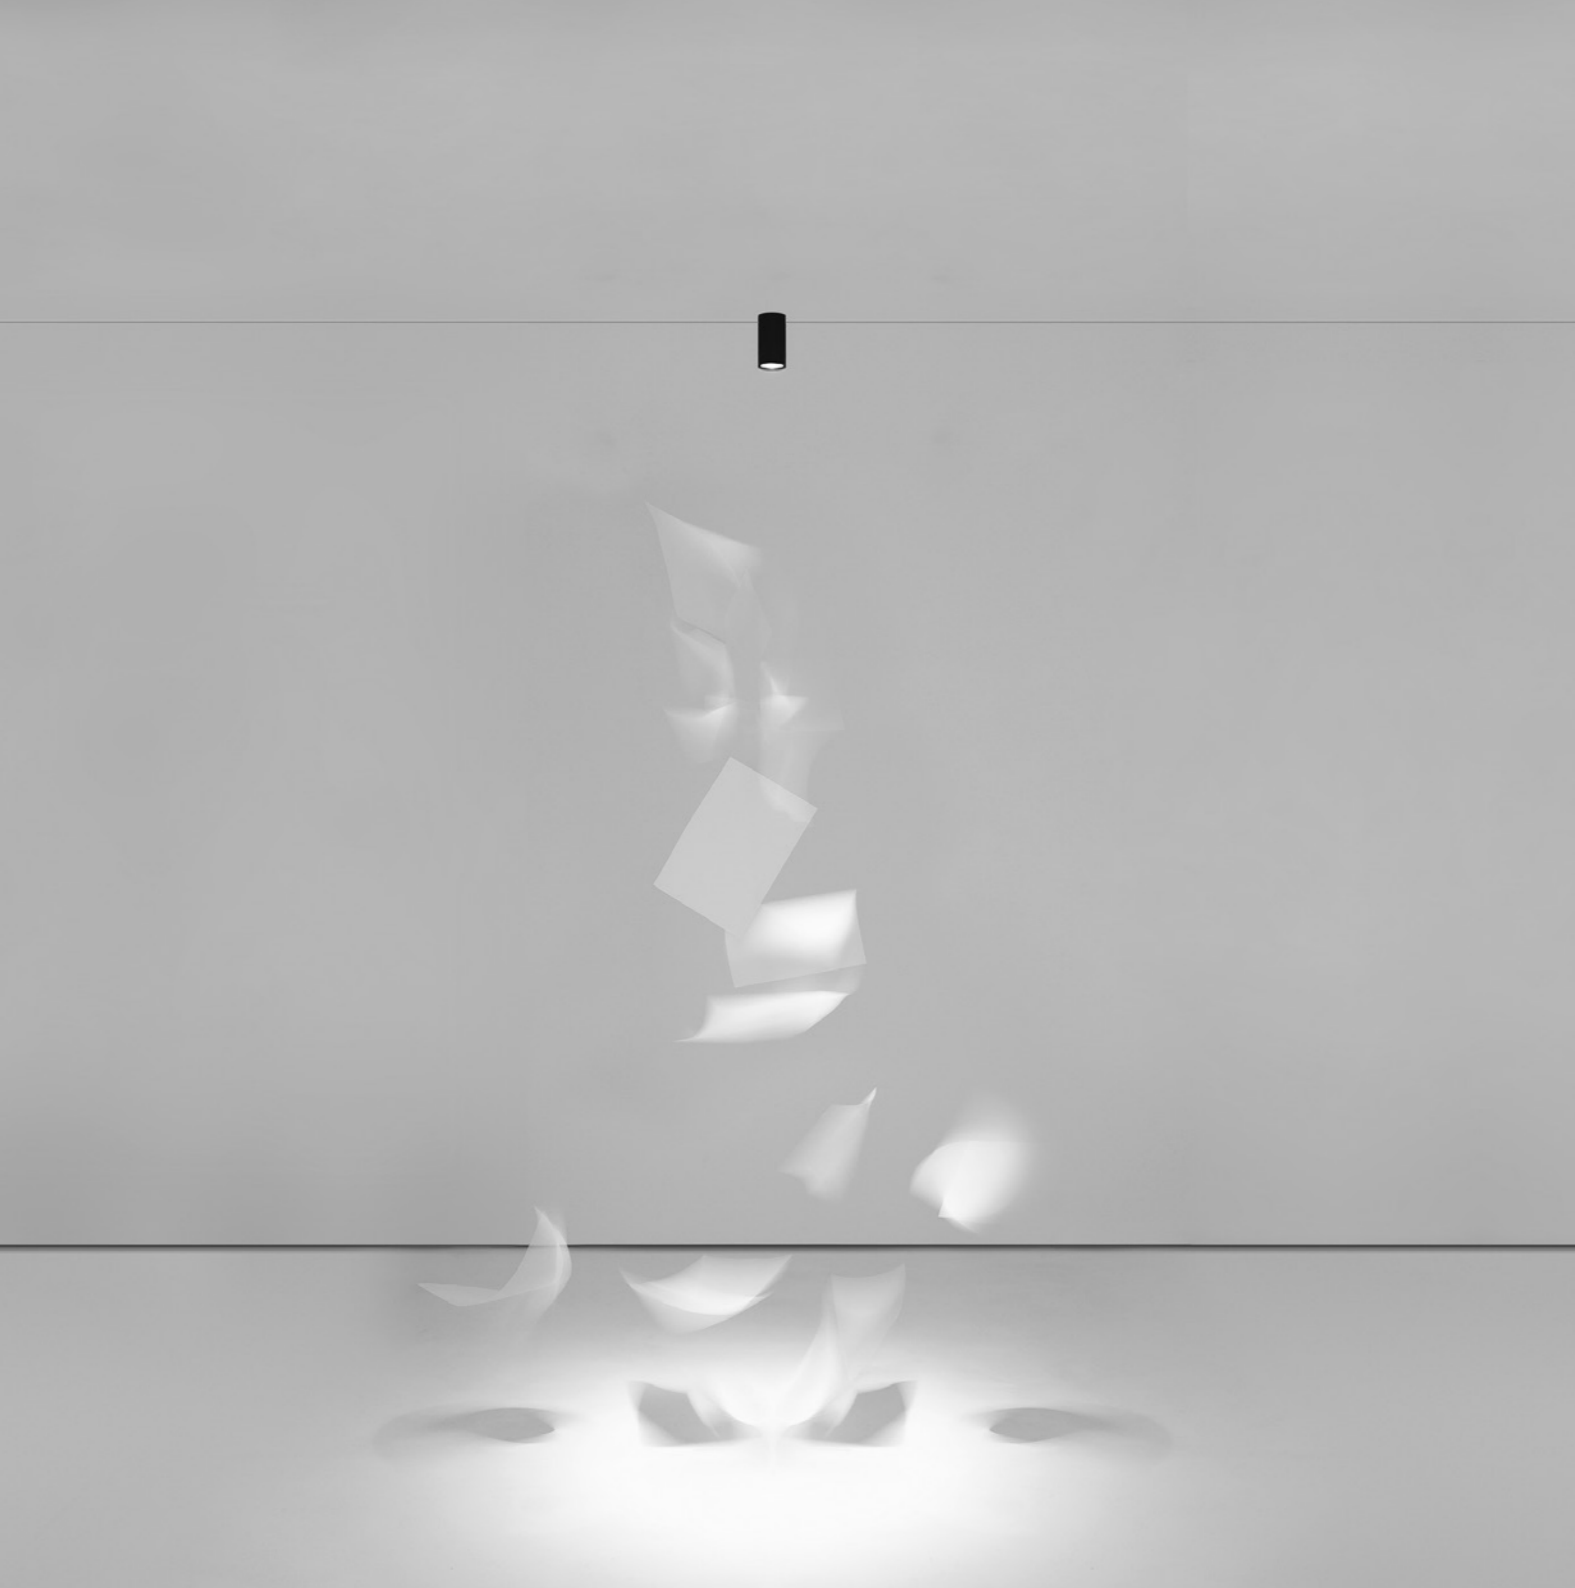


Light runs on a wire. An almost imperceptible wire, suspended in space. Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes. Its secret is a special unipolar wire stretched from wall to wall. Where the light comes from is discreetly hidden, giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.


Luminaire designed also to be powered by ENDLESS conductive tape.

**Selection for ADI Design Index 2020**

Remote driver version

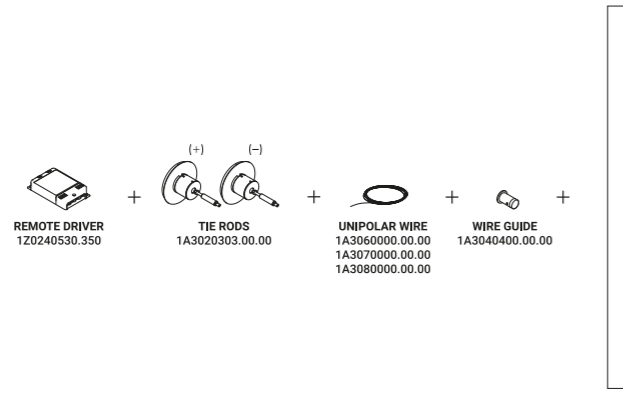


Wall/ceiling driver version

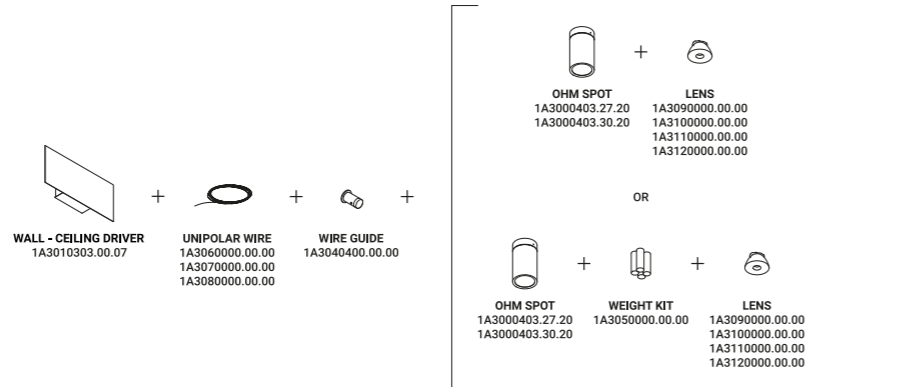

Systems / Direct / Indoor

**Material** Metal - PA  
**Finish** .04 Matt Black

**Note** Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.



**OHM SPOT**  
 3,2W  
 Max 350mA DC  
 2700K / 3000K  
 CRI >95  
 Driver not included


Matt Black - 2700K  
 Matt Black - 3000K

1A3000403.27.20  
 1A3000403.30.20



**Compulsory accessories**

Installation kits



<b>Tie rods (positive/negative)</b> <span style="float: right;">Not included</span>			
Matt White	2 Pieces	1A3020303.00.00	




<b>Unipolar wire - 472.44"</b> <span style="float: right;">Not included</span>			
	Max 60V DC	1A3060000.00.00	


<b>Unipolar wire - 944.88"</b> <span style="float: right;">Not included</span>			
	Max 60V DC	1A3070000.00.00	

<b>Unipolar wire - 1889.76"</b> <span style="float: right;">Not included</span>			
	Max 60V DC	1A3080000.00.00	

Drivers



<b>Driver</b> <span style="float: right;">Not included</span>			
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350	



<b>Wall/ceiling driver</b> <span style="float: right;">Not included</span>			
Matt White		1A3010303.00.07	

Other accessories



<b>Lens</b> <span style="float: right;">Not included</span>			
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

**Optional accessories**

Installation kits




<b>Wire guide</b> <span style="float: right;">Not included</span>			
Matt Black	1 Piece	1A3040400.00.00	




<b>Weight kit for suspension version</b> <span style="float: right;">Not included</span>			
	4 Pieces	1A3050000.00.00	




<b>Power base for Endless</b> <span style="float: right;">Not included</span>			
Matt White		1A0810303.00.00	
Matt Black		1A0810403.00.00	

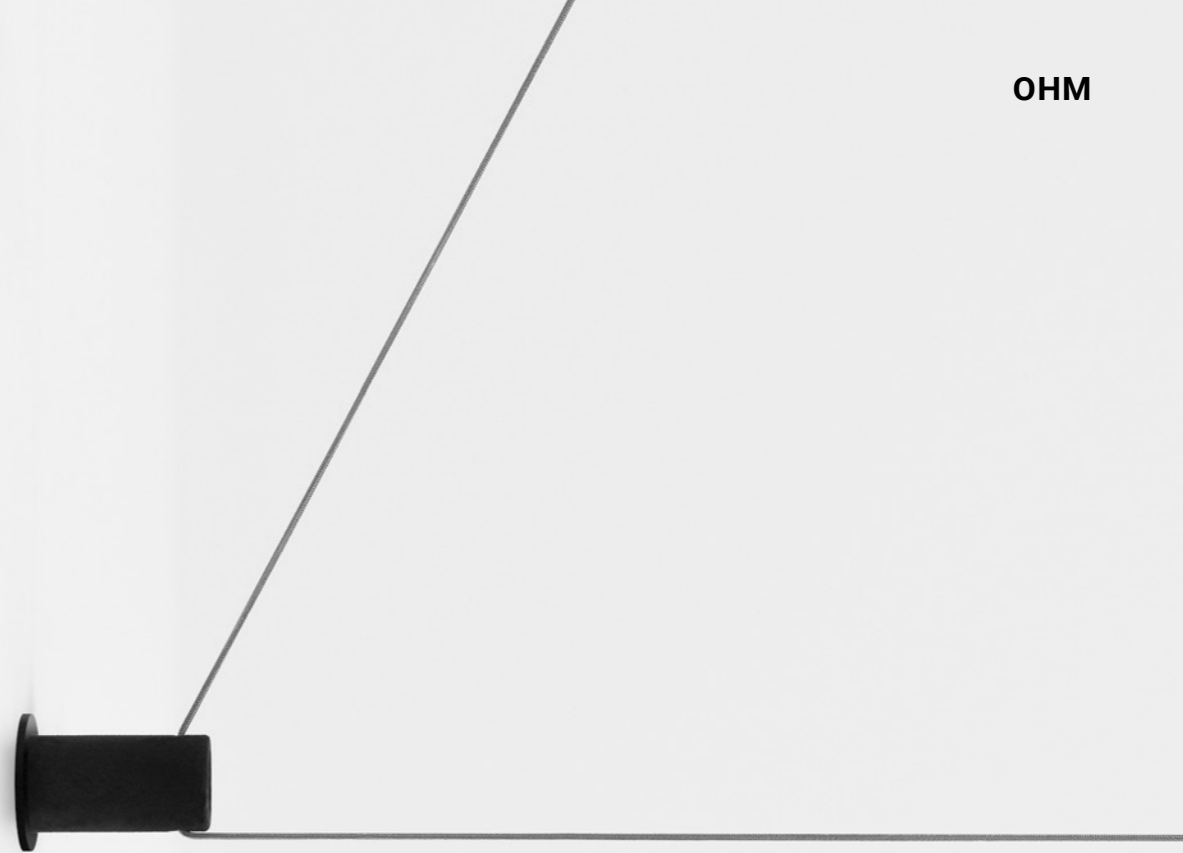


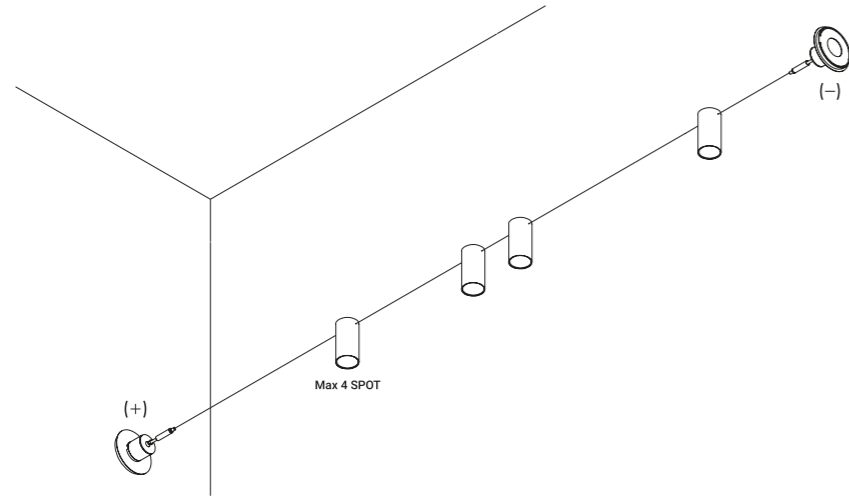

Remote driver version

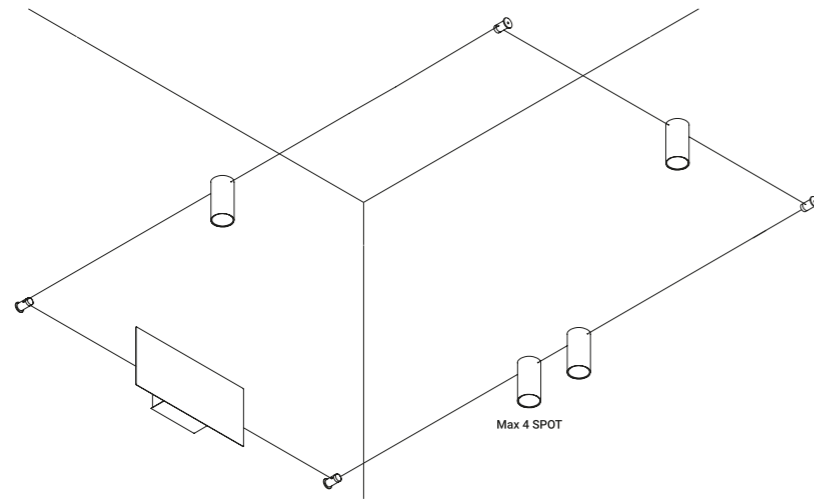

Wall/ceiling driver version

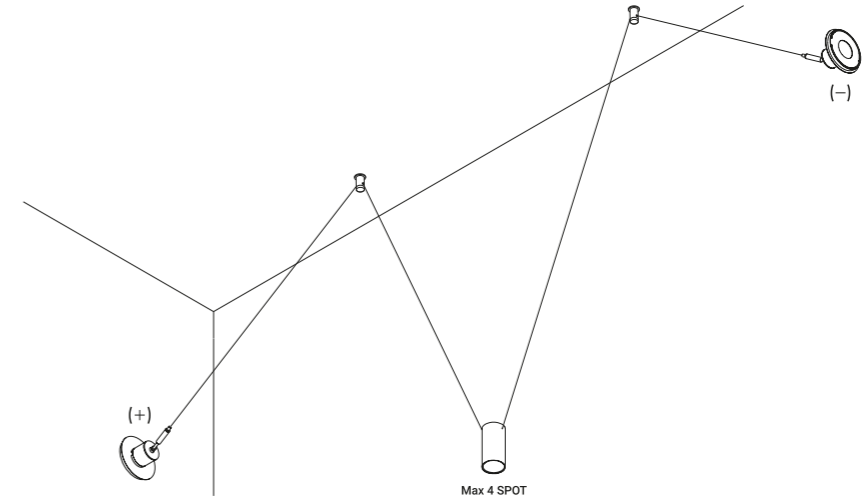

Suspension version




Utopia is a project on the limit state of light,  
the research for the minimum dimension necessary for pure and essential lighting.  
It represents full flexibility, in both its design and its light control.  
The light strip reaches into space, bending,  
breaking and drawing abstract, mysterious patterns.  
Luminaire designed also to be powered by ENDLESS conductive tape.

Systems / Indirect / Indoor

**Material** Metal - PVC  
**Finish** .00 Standard

**Note** Special stainless steel and rubber profile stretched from wall to wall. Available in 236,22" / 472,44" with a single power unit and uniform lighting. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.




**UTOPIA 6**

Max 79W  
 24V DC  
 2700K - 6079lm / 3000K - 6322lm  
 CRI >90  
 Driver not included



Standard - 2700K  
 Standard - 3000K

1A4250003.27.20  
 1A4250003.30.20

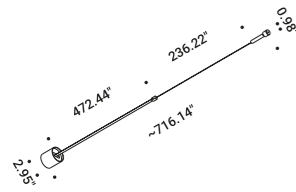

**UTOPIA 12**

Max 125W  
 24V DC  
 2700K - 10133lm / 3000K - 10538lm  
 CRI >90  
 Driver not included




Standard - 2700K  
 Standard - 3000K


1A4600003.27.20  
 1A4600003.30.20

**Compulsory accessories**


**Drivers**




<b>Driver</b>				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	UTOPIA 6	1Z2020040	




<b>Driver</b>				Not included
100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540	



<b>Driver</b>				Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	UTOPIA 12	1Z2020060	



<b>Driver</b>				Not included
100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500	




<b>Controller</b>				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	UTOPIA 6 / UTOPIA 12	1Z2170020	

**Optional accessories**


**Installation kits**




<b>Accessory 1</b>				Not included
Polished Chrome			1A4480100.00.00	




<b>Accessory 2</b>				Not included
Polished Chrome			1A4490100.00.00	



<b>Wall back plate</b>				Not included
Matt Black			1X0090400.02.00	

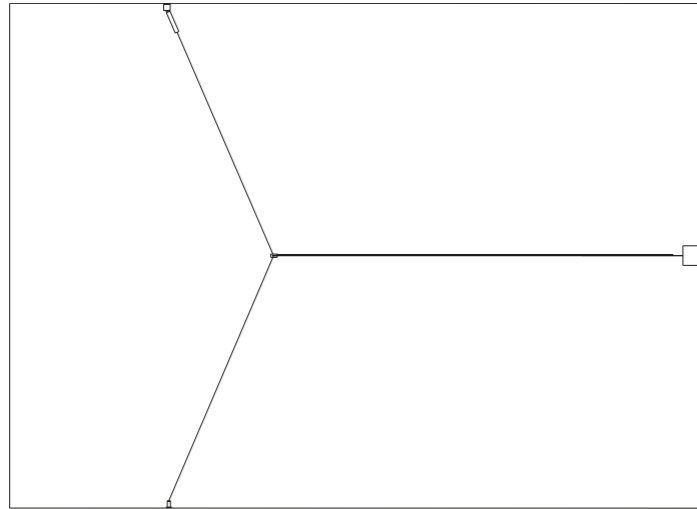

1A4480100.00.00 - Example of installation with accessory 1

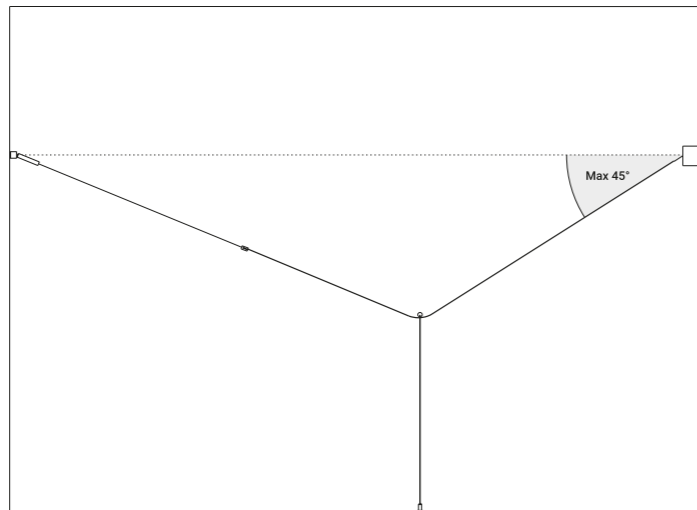

1A4490100.00.00 - Example of installation with accessory 2



## **TRACKS - PROFILES**

**BINARIO TRIFASE**


/ 2007



Pure line in space.  
Our Sistema track holds the light solution Dot.



**Power right connector and power left connector installation**

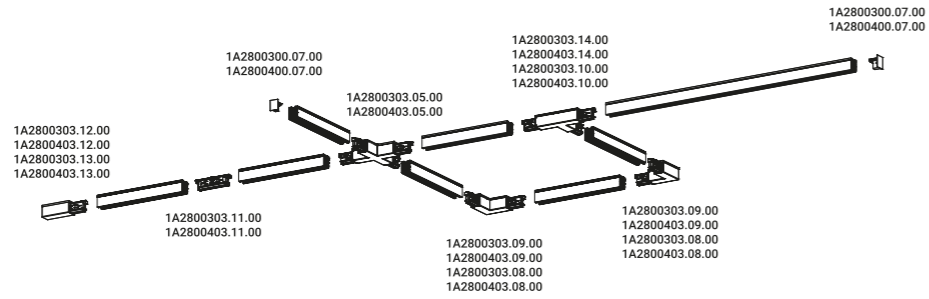

Systems / Direct / Indoor


Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black


Note Ceiling and wall track system.

**Compulsory accessories**

Installation kits



Track 39.37"		Not included
Matt White	Input 120V	1A2800303.01.00
Matt Black	Input 120V	1A2800403.01.00



Track 78.74"		Not included
Matt White	Input 120V	1A2800303.02.00
Matt Black	Input 120V	1A2800403.02.00



End cap		Not included
Matt White		1A2800300.07.00
Matt Black		1A2800400.07.00

Drivers



Power right connector		Not included
Matt White	Input 120V	1A2800303.13.00
Matt Black	Input 120V	1A2800403.13.00



Power left connector		Not included
Matt White	Input 120V	1A2800303.12.00
Matt Black	Input 120V	1A2800403.12.00

**Optional accessories**

Installation kits



<b>Linear connector</b>		Not included
Matt White	Input 120V	1A2800303.11.00
Matt Black	Input 120V	1A2800403.11.00



<b>Internal L connector</b>		Not included
Matt White	Input 120V	1A2800303.09.00
Matt Black	Input 120V	1A2800403.09.00



<b>External L connector</b>		Not included
Matt White	Input 120V	1A2800303.08.00
Matt Black	Input 120V	1A2800403.08.00



<b>Right T connector</b>		Not included
Matt White	Input 120V	1A2800303.14.00
Matt Black	Input 120V	1A2800403.14.00



<b>Left T connector</b>		Not included
Matt White	Input 120V	1A2800303.10.00
Matt Black	Input 120V	1A2800403.10.00



<b>X connector</b>		Not included
Matt White	Input 120V	1A2800303.15.00
Matt Black	Input 120V	1A2800403.15.00



<b>Adjustable suspension cable</b>		Not included
	Length 590.55"	1A2800000.04.00



<b>Adjustable suspension cable</b>		Not included
	Length 118.11"	1A2800000.05.00



<b>Adjustable suspension cable</b>		Not included
	Length 196.85"	1A2800000.06.00




<b>Cutting tool</b>		Not included
		1A2800300.17.00



**Compulsory accessories**

Luminaires




**DOT BINARIO**

13W  
120V - 60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
ON/OFF

Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF

1A2290303.27.00  
1A2290303.30.00  
1A2290403.27.00  
1A2290403.30.00



**DOT BINARIO 51**

Max 10W  
120V - 60Hz  
ON/OFF  
Bulb not included

Matt White - ON/OFF  
Matt Black - ON/OFF

1A3710303.00.00  
1A3710403.00.00

**Compulsory accessories**

Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm 3000K - CRI >97 - 1038lm	DOT BINARIO	1A3090000.00.00
Beam - 24°	2700K - CRI >97 - 943lm 3000K - CRI >97 - 996lm	DOT BINARIO	1A3100000.00.00
Beam - 36°	2700K - CRI >97 - 955lm 3000K - CRI >97 - 1005lm	DOT BINARIO	1A3110000.00.00
Beam - 50°	2700K - CRI >97 - 965lm 3000K - CRI >97 - 1016lm	DOT BINARIO	1A3120000.00.00

**Optional accessories**


Other accessories




Accessory holder + Honeycomb louvre		Not included	
		DOT BINARIO	1X0080400.01.00



Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00




Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00




Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

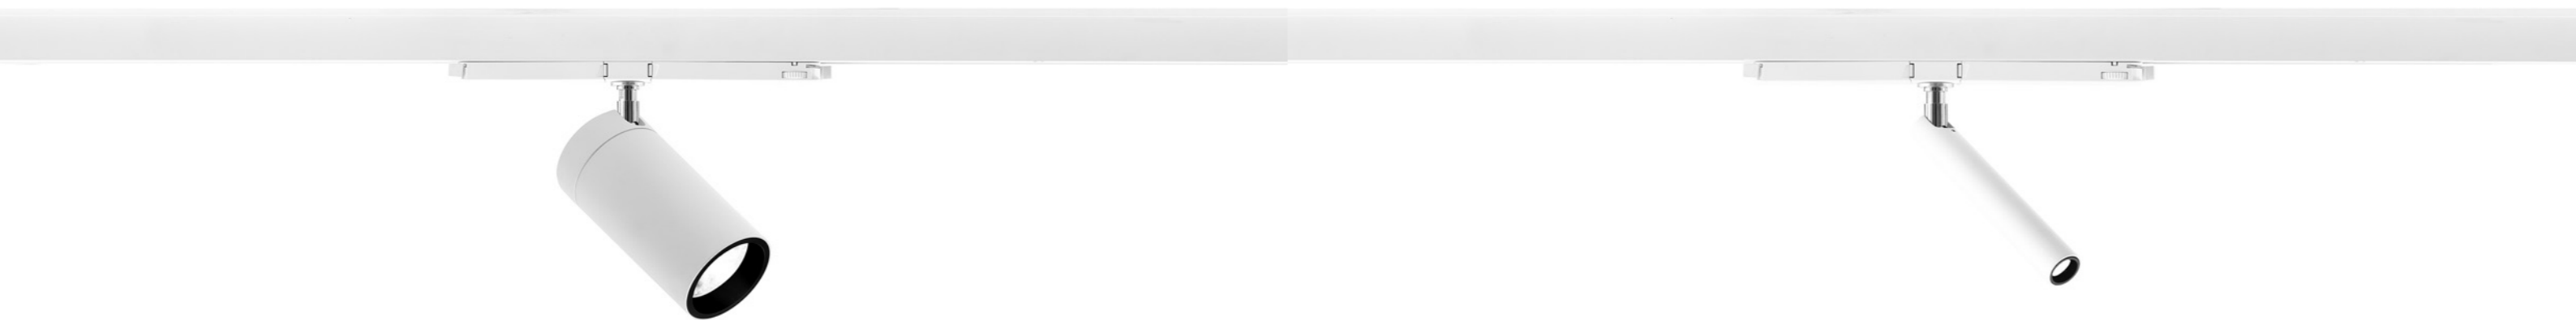



Plasterboard track for recessed installation. It is designed for use with state-of-the-art LED modules to create a wide range of light beams.

Layout example

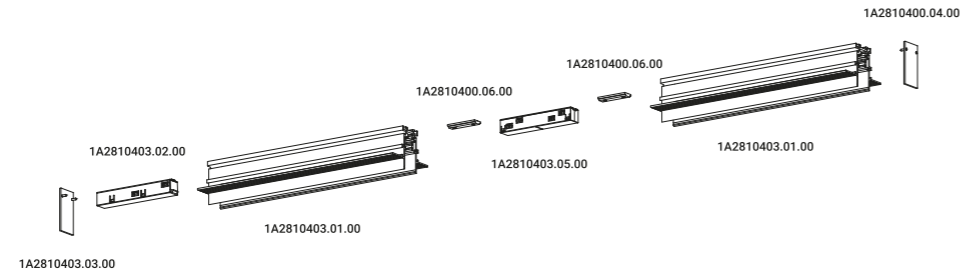

Systems / Direct / Indoor


Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black

Note Recessed track system operating at 48V DC.

Compulsory accessories

Installation kits



<b>Plasterboard track 0.49"</b>		Not included
Matt Black	48V DC - Max 15A - Lenght 2000mm - Cut-out 2000 x 26mm	1A2810403.01.00



<b>Power connector</b>		Not included
Matt Black	Output 48V - Max 15A	1A2810403.02.00







<b>End cap for power connector</b>		Not included
Matt Black		1A2810403.03.00



<b>End cap</b>		Not included
Matt Black		1A2810400.04.00




Compulsory accessories

Drivers

	<b>Driver</b>	Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250
	<b>Driver</b>	Not included
100-240V	48V/320W/IP67/1-10V	1Z1120380
	<b>Driver</b>	Not included
	Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810003.12.00
	<b>Driver</b>	Not included
	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810003.11.00


Optional accessories

Installation kits

	<b>Linear connector</b>	Not included
Matt Black	Output 48V - Max 15A	1A2810403.05.00
	<b>Reinforcing bracket</b>	Not included
Matt Black		1A2810400.06.00
	<b>Clamp with M6 grippe</b>	Not included
		1A2810000.07.00
	<b>Suspension set</b>	Not included
		1A2810000.08.00
	<b>Plaster installation guard</b>	Not included
	Length 78.74"	1A2810000.09.00
	<b>Cutting tool</b>	Not included
		1A2810000.10.00

Compulsory accessories

Luminaires



DOT FRAMELESS

13W  
48V DC  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI

1A0090303.27.01  
1A0090303.30.01  
1A0090403.27.01  
1A0090403.30.01

Compulsory accessories

Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
	DOT FRAMELESS	1X0080400.01.00	




Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.05.00



**OUTDOOR**



## BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.  
A study of camouflage. The reflective surface is used as a tool  
to camouflage and hide the machine to create light.  
The reflection of the environment makes the luminaire invisible.


# BELLADINOTTE

Maurizio Mancini / 2012

Floor-Outdoor / Indirect / Outdoor

**Material** Metal  
**Finish** .00 Standard

**Note** Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (196,85").



## BELLADINOTTE

2x4,2W  
 24V DC  
 2700K - 262lm / 3000K - 282lm  
 CRI >90  
 Driver not included




Standard - 2700K  
 Standard - 3000K

1A3560003.27.20  
 1A3560003.30.20

## Compulsory accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





## BUBKA

Daniele Sprega / 2014

A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.


Outdoor-Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** .00 Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (275,59").



**BUBKA**


8,4W  
 Max 700mA DC  
 2700K - 639lm / 3000K - 639lm  
 CRI >90  
 Driver not included  


Standard - 2700K  
 Standard - 3000K

1A3600003.27.20  
 1A3600003.30.20

**Compulsory accessories**


Drivers



Driver			Not included
100-240V	700mA/21W/IP67/ON/OFF	1Z1120100	


**Optional accessories**

Installation kits



Anchoring bolt		Not included
Cut-out Ø 9.84"	1A3620000.00.00	
Minimum space for mounting 13.78"		

Lighting modules



Additional LED head		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90	1A3610403.30.20
	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90	1A3610403.27.20



## BUBKA BOLLARD

Daniele Sprega / 2021

A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.


# BUBKA BOLLARD

Daniele Sprega / 2021

Outdoor-Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** .00 Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (354.33").



## BUBKA BOLLARD

8,4W  
 Max 700mA DC  
 2700K - 350lm / 3000K - 350lm  
 CRI >90  
 Driver not included




Standard - 2700K  
 Standard - 3000K

1A1440003.27.20  
 1A1440003.30.20

## Compulsory accessories

Drivers




Driver			Not included
100-240V	350mA/16W/IP67/ON/OFF	1Z1120130	

Daniele Sprega / 2021

# BUBKA BOLLARD


## Optional accessories

Installation kits



Anchoring bolt		Not included
Cut-out Ø 9.84"	1A3620000.00.00	
Minimum space for mounting 13.78"		

Lighting modules



Additional LED head		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90	1A3610403.30.20
	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90	1A3610403.27.20



## **BUIO**

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity,  
but in the choice and assumption of a method,  
the method of amazement and memory.



# BUIO - TRIMLESS


Maurici Ginés / 2023

Recessed / Direct / Outdoor

**Material**

**Finish** .04 Matt Black

**Note** Outdoor luminaire. Available with transparent or black glass. Black cable (39,37").




**BUJO TRIMLESS - 13°**

Black filter  
6,2W  
24V DC  
2700K - 120lm / 3000K - 123lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5200403.27.20  
1A5200403.30.20



**BUJO TRIMLESS - 25°**

Black filter  
6,2W  
24V DC  
2700K - 150lm / 3000K - 155lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included




Matt Black - 2700K  
Matt Black - 3000K

1A5220403.27.20  
1A5220403.30.20

Maurici Ginés / 2023

# BUIO - TRIMLESS




**BUJO TRIMLESS - 32°**

Black filter  
6,2W  
24V DC  
2700K - 140lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5210403.27.20  
1A5210403.30.20




**BUJO TRIMLESS ELLIPTICAL**

Black filter  
6,2W  
24V DC  
2700K - 132lm / 3000K - 136lm  
CRI >90  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5230403.27.20  
1A5230403.30.20




**BUIO TRIMLESS - 13°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 239lm / 3000K - 246lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5240403.27.20  
 1A5240403.30.20




**BUIO TRIMLESS - 25°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 300lm / 3000K - 309lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5260403.27.20  
 1A5260403.30.20




**BUIO TRIMLESS - 32°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 279lm / 3000K - 288lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5250403.27.20  
 1A5250403.30.20



**BUIO TRIMLESS ELLIPTICAL**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 263lm / 3000K - 271lm  
 CRI >90  
 UGR <19  
 Driver not included




Matt Black - 2700K  
 Matt Black - 3000K

1A5270403.27.20  
 1A5270403.30.20

**Compulsory accessories**

**Installation kits**




**Installation box**

Standard

1A5280000.00.00

Not included

**Drivers**



**Driver**

110-240V

24V/25W/IP67/ON/OFF

1Z1120620

Not included

# BUIO - TRIM


Maurici Ginés / 2023

Recessed / Direct / Outdoor

**Material**

**Finish** .04 Matt Black

**Note** Outdoor luminaire. Available with transparent or black glass. Black cable (39,37").



**BUIO TRIM - 13°**

Black filter  
6,2W  
24V DC  
2700K - 120lm / 3000K - 123lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included

Matt Black - 2700K  
Matt Black - 3000K

1A5120403.27.20  
1A5120403.30.20

**BUIO TRIM - 25°**


Black filter  
6,2W  
24V DC  
2700K - 150lm / 3000K - 155lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included

Matt Black - 2700K  
Matt Black - 3000K

1A5140403.27.20  
1A5140403.30.20

Maurici Ginés / 2023

# BUIO - TRIM




**BUIO TRIM - 32°**

Black filter  
6,2W  
24V DC  
2700K - 140lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included

Matt Black - 2700K  
Matt Black - 3000K

1A5130403.27.20  
1A5130403.30.20




**BUIO TRIM ELLIPTICAL**

Black filter  
6,2W  
24V DC  
2700K - 132lm / 3000K - 136lm  
CRI >90  
UGR <19  
Driver not included

Matt Black - 2700K  
Matt Black - 3000K

1A5150403.27.20  
1A5150403.30.20




**BUJO TRIM - 13°**

Transparent filter  
6,2W  
24V DC  
2700K - 239lm / 3000K - 246lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5160403.27.20  
1A5160403.30.20




**BUJO TRIM - 25°**

Transparent filter  
6,2W  
24V DC  
2700K - 300lm / 3000K - 309lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5180403.27.20  
1A5180403.30.20




**BUJO TRIM - 32°**

Transparent filter  
6,2W  
24V DC  
2700K - 279lm / 3000K - 288lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5170403.27.20  
1A5170403.30.20



**BUJO TRIM ELLIPTICAL**

Transparent filter  
6,2W  
24V DC  
2700K - 263lm / 3000K - 271lm  
CRI >90  
UGR <19  
Driver not included




Matt Black - 2700K  
Matt Black - 3000K

1A5190403.27.20  
1A5190403.30.20

**Compulsory accessories**

**Installation kits**




**Installation box**

Standard

1A5280000.00.00

Not included

**Drivers**



**Driver**

110-240V

24V/25W/IP67/ON/OFF

1Z1120620

Not included

# BUIO - SPOT

Maurici Ginés / 2023


Floor-Wall-Ceiling / Direct / Outdoor

**Material**

**Finish** .04 Matt Black

**Note**

Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (39,37").




**BUIO - 13°**

Black filter  
6,2W  
24V DC  
2700K - 120lm / 3000K - 123lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5040403.27.20  
1A5040403.30.20



**BUIO - 25°**

Black filter  
6,2W  
24V DC  
2700K - 150lm / 3000K - 155lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included




Matt Black - 2700K  
Matt Black - 3000K

1A5060403.27.20  
1A5060403.30.20

Maurici Ginés / 2023

# BUIO - SPOT




**BUIO - 32°**

Black filter  
6,2W  
24V DC  
2700K - 140lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5050403.27.20  
1A5050403.30.20




**BUIO ELLIPTICAL**

Black filter  
6,2W  
24V DC  
2700K - 132lm / 3000K - 136lm  
CRI >90  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5070403.27.20  
1A5070403.30.20




**BUIO - 13°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 239lm / 3000K - 246lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5080403.27.20  
 1A5080403.30.20




**BUIO - 25°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 300lm / 3000K - 309lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5100403.27.20  
 1A5100403.30.20




**BUIO - 32°**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 279lm / 3000K - 288lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5090403.27.20  
 1A5090403.30.20



**BUIO ELLIPTICAL**

Transparent filter  
 6,2W  
 24V DC  
 2700K - 263lm / 3000K - 271lm  
 CRI >90  
 UGR <19  
 Driver not included







Matt Black - 2700K  
 Matt Black - 3000K


1A5110403.27.20  
 1A5110403.30.20

**Compulsory accessories**

Installation kits



Drivers



<b>Wall bracket</b>		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00

<b>Ceiling rose</b>		Not included
Matt Black	Brushed INOX	1A4441000.00.00

<b>Earth spike</b>		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00

<b>Tree strap</b>		Not included
Standard	Length 39.37"	1A4590000.00.00

<b>Driver</b>		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





## GRILLO

Daniele Sprega / 2012





A small luminous elf that you can install in your garden or inside a vase.  
A thin stem stuck into the ground and a little adjustable LED projector.  
For illuminating a flower, a plant or simply to accompany us along a path.  
Lamp with spike.

Floor-Outdoor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** .04 Matt Black

**Note** Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (196,85").




**GRILLO**  
 4,2W  
 24V DC  
 3000K - 282lm  
 CRI >90  
 Driver not included  


Matt Black - 3000K

| 1A3570403.30.20 |

**Compulsory accessories**

Drivers



<b>Driver</b>			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	


**Optional accessories**

Installation kits



<b>Additional stem 39.37"</b>		Not included
Standard	AISI 316L stainless steel	1A3590000.00.00

Lighting modules



<b>Additional LED head</b>		Not included
Matt Black	24V DC - 4,2W	1A3580403.27.20
	2700K - 262lm - CRI >90	
	24V DC - 4,2W	1A3580403.30.20
	3000K - 282lm - CRI >90	




Light has found a home.  
A lamp designed to welcome, illuminating the entrance.

Wall-Outdoor / Direct / Outdoor

Material Metal  
 Finish .00 Standard

Note Outdoor wall luminaire. Matt black body and matt red top cover. Red hole light.




**IMU**  
 5,5W  
 Max 350mA DC  
 3000K - 306lm  
 CRI >80  
 Driver not included  
 IP65

Standard - 3000K

| 1A3550003.30.20 |

**Compulsory accessories**

Drivers



Driver		Not included
100-240V	350mA/16W/IP67/ON/OFF	1Z1120130



## LENTA

Bestetti Associati - Davide Groppi / 2011



A lantern. Soft and diffuse light.  
A Slow-Light project for outdoors.

# LENTA


Bestetti Associati - Davide Groppi / 2011

Floor-Outdoor / Diffuse / Outdoor

Material Metal - Methacrylate - Polycarbonate

Finish .03 Matt White

Note Outdoor floor luminaire. Matt white diffuser. Black cable (196,85").



## LENTA

Max 18W - E26

120V - 60Hz

ON/OFF

Bulb not included


IP65

Matt White - ON/OFF

1A3630303.00.00

## Optional accessories

Other accessories



IP65 Schuko adapter

Not included

IP65

1A2950000.00.00





## NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.  
A simple project: a cable and a LED.  
Indoor version also available.


# NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** **.04** Matt Black **.32** Copper Oxide

**Note** Outdoor suspension luminaire. Black cable (393,70").



## NEURO OUTDOOR

4,2W  
 24V DC  
 2700K - 262lm / 3000K - 282lm  
 CRI >90  
 Driver not included




Matt Black - 2700K  
 Matt Black - 3000K  
 Copper Oxide - 2700K  
 Copper Oxide - 3000K

1A4030403.27.20  
 1A4030403.30.20  
 1A4033203.27.20  
 1A4033203.30.20

## Compulsory accessories

Drivers



Driver	Not included	
110-240V	24V/25W/IP67/ON/OFF	1Z1120620







## NUIT

Maurici Ginés / 2023

Night has always been a source of inspiration.  
We walk, and we are not alone.  
Nuit is a small travel companion that draws our night-time journeys.


# NUIT

Maurici Ginés / 2023

Outdoor-Recessed / Diffuse / Indoor-Outdoor

<b>Material</b>	Metal		
<b>Finish</b>	<b>.03</b> Matt White	<b>.27</b> Gravity Black	<b>.38</b> Blasted Inox

**Note** Outdoor recessed luminaire. Minimum space for recessed installation: 2.16".




**NUIT**

1W  
24V DC  
2700K - 45lm / 3000K - 50lm  
CRI >90  
Driver not included

Blasted Inox - 3000K	1A1323803.30.20
Matt White - 2700K	1A1320303.27.20
Matt White - 3000K	1A1320303.30.20
Gravity Black - 2700K	1A1322703.27.20
Gravity Black - 3000K	1A1322703.30.20
Blasted Inox - 2700K	1A1323803.27.20


## Compulsory accessories

Installation kits



<b>Concrete box</b>	Not included
Standard	1A4460000.00.00

Drivers



<b>Driver</b>	Not included
110-240V      24V/25W/IP67/ON/OFF	1Z1120620

Maurici Ginés / 2023

# NUIT

## Optional accessories

Installation kits



<b>Plasterboard frame 0.49"</b>	Not included
Matt White      Cut-out 3.93" x 3.93" Minimum space for mounting 4.72"	1A4470000.00.00



<b>Adapter plasterboard frame 0.98"</b>	Not included
Standard	1A5030000.00.00



## ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light. Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.

**AZ Award 2021 and People's Choice  
Archiproducts Design Award 2020**


# ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

**Material** Glass fiber - Metal  
**Finish** .04 Matt Black

**Note** Outdoor floor luminaire. Black cable (196,85").



## ORIGINE OUTDOOR

35W  
 24V DC  
 2700K - 2872lm / 3000K - 2930lm  
 CRI >80  
 Driver not included




Matt Black - 2700K  
 Matt Black - 3000K

1A2480403.27.20  
 1A2480403.30.20

## Compulsory accessories

Drivers



Driver		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260





A tool to light.  
The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# OUT 44

/ 2021

Outdoor-Wall / Direct / Outdoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Outdoor wall and ceiling luminaire. Adjustable along the vertical axis. Black cable.



## OUT 44 - 14°

2W  
 Max 500mA DC  
 3000K - 133lm  
 CRI >90  
 Beam 14°  
 Driver not included



Matt Black - 3000K

| 1A1600403.30.20 |



## OUT 44 - 23°

2W  
 Max 500mA DC  
 3000K - 133lm  
 CRI >90  
 Beam 23°  
 Driver not included



Matt Black - 3000K


| 1A1610403.30.20 |

# OUT 44

/ 2021

## Compulsory accessories


Drivers




Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500

## Optional accessories

Installation kits




Wall adapter plate		Not included
Matt Black		1A1630403.00.00
Matt White		1A1630303.00.00



Earth spike		Not included
Standard		1A1620000.00.00



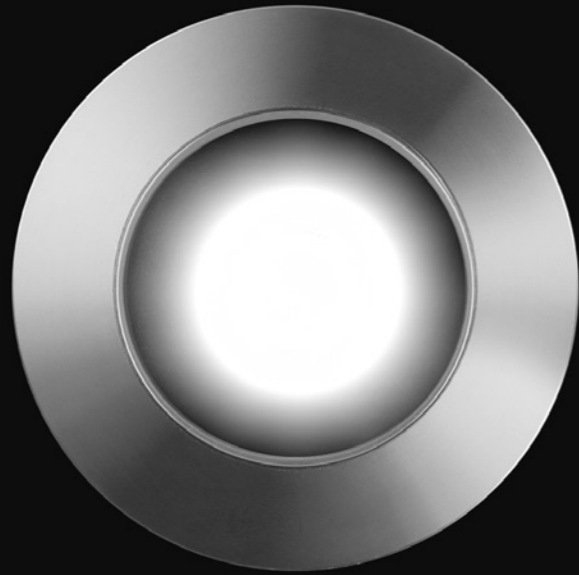

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



# OUT 58

/ 2021

Recessed-Outdoor / Direct / Outdoor

**Material** Glass - Metal  
**Finish** .10 Stainless Steel

**Note** Outdoor recessed luminaire. AISI 316L stainless steel body.



## OUT 58

7W  
 24V DC  
 3000K - 546lm  
 CRI >90  
 Driver not included



Stainless Steel - 3000K

1A1551003.30.20

## Compulsory accessories

Installation kits




### Installation box

Not included

Cut-out 2.16"  
 Minimum space for mounting 4.33"

1A1560000.00.00

Drivers




### Driver

Not included

110-240V 24V/25W/IP67/ON/OFF

1Z1120620



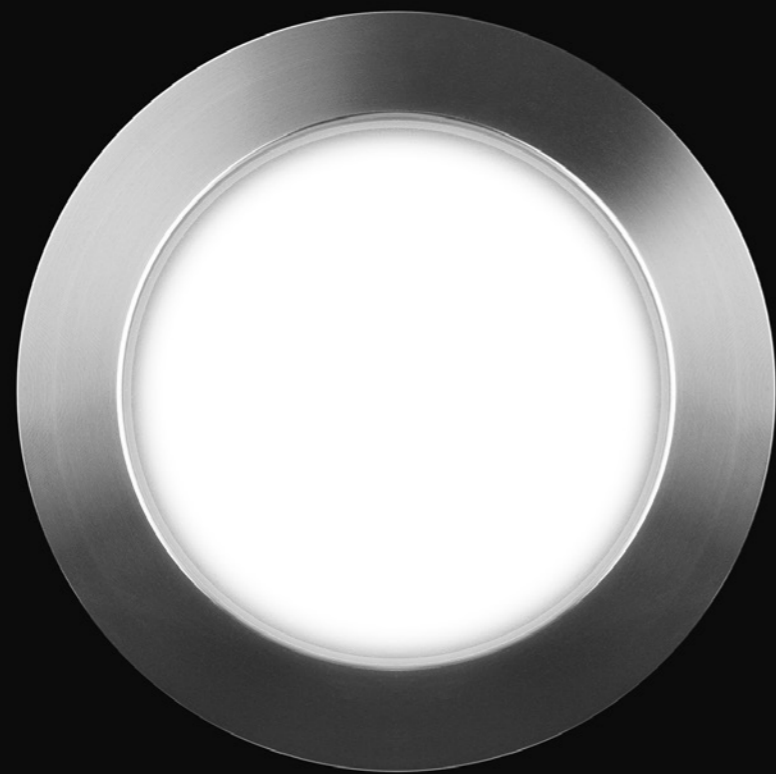

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

# OUT 100

/ 2021

Recessed-Outdoor / Direct / Outdoor


**Material** Glass - Metal  
**Finish** .10 Stainless Steel

**Note** Outdoor recessed luminaire. AISI 316L stainless steel body.



### OUT 100 - 15°

20W  
 Max 500mA DC  
 3000K - 2058lm  
 CRI >90  
 Beam 15°  
 Driver not included




Stainless Steel - 3000K

| 1A1571003.30.20 |



### OUT 100 - 23°

20W  
 Max 500mA DC  
 3000K - 2058lm  
 CRI >90  
 Beam 23°  
 Driver not included



Stainless Steel - 3000K

| 1A1581003.30.20 |

/ 2021

# OUT 100

## Compulsory accessories

### Installation kits




### Installation box

Not included

Standard	Cut-out 3.70" Minimum space for mounting 6.30"	1A1590000.00.00
----------	---	-----------------

### Drivers



### Driver

Not included

220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	1Z0241170
--------------------	----------------------------	-----------

## SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011



A special project, an authentic ready-made.  
Obtained from a fishing flexible rod, it is a delicate and elegant sign,  
which brings to mind the subtle branches of a willow tree  
or bamboo canes floating on a light breeze.  
Sampei is an unexpected gift, it is the magic of looking up,  
using light as a hook, and being amazed by so much weightlessness.  
Indoor version also available.

Compasso d'Oro ADI  
Award 2014




# SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

**Material** Glass fiber - Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Outdoor floor luminaire. Adjustable in all directions. Black cable (196,85").

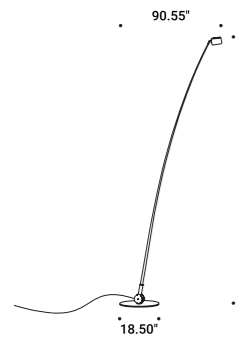

## SAMPEI 440 OUTDOOR

8,4W  
 Max 700mA DC  
 2700K - 639lm / 3000K - 639lm  
 CRI >90  
 Driver not included




Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K

1A3770303.27.20  
 1A3770303.30.20  
 1A3770403.27.20  
 1A3770403.30.20

## Compulsory accessories

Drivers



Driver		Not included
100-240V	700mA/21W/IP67/ON/OFF	1Z1120100



## SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.  
Indoor version also available.


# SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

Floor-Outdoor / Diffuse / Outdoor

**Material** Metal - PBT - Polycarbonate  
**Finish** .00 Standard

**Note** Outdoor floor luminaire. Hand-stitched shade. Matt black stems. Black cable (196.85").



## SHOJI

Max 18W - E26

120V - 60Hz

ON/OFF

Bulb not included


IP65

Standard - ON/OFF

| 1A3640003.00.00 |

## Optional accessories

Other accessories





IP65 Schuko adapter

Not included

IP65

1A2950000.00.00





## DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	1068lm	>90	F	X	1A4700000.27.20
	350mA DC	11,7W	15°	3000K	1091lm	>90	F	X	1A4700000.30.20
	350mA DC	11,7W	22°	2700K	1508lm	>90	F	X	1A3890000.27.20
	350mA DC	11,7W	22°	3000K	1578lm	>90	F	X	1A3890000.30.20
	350mA DC	11,7W	36°	2700K	1266lm	>90	F	X	1A3900000.27.20
	350mA DC	11,7W	36°	3000K	1323lm	>90	F	X	1A3900000.30.20
	400mA DC	13,5W	15°	2700K	1318lm	>90	F	X	1A4700003.27.20
	400mA DC	13,5W	15°	3000K	1345lm	>90	F	X	1A4700003.30.20
	400mA DC	13,5W	22°	2700K	1487lm	>90	F	X	1A3890003.27.20
	400mA DC	13,5W	22°	3000K	1556lm	>90	F	X	1A3890003.30.20
	400mA DC	13,5W	36°	2700K	1446lm	>90	F	X	1A3900003.27.20
	400mA DC	13,5W	36°	3000K	1512lm	>90	F	X	1A3900003.30.20




	Power	Input	Output	Dimming	Protection	Code
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	60W	120-277V	24V	TRIAC - 1-10V	IP20	1Z2020040
	96W	120-277V	24V	TRIAC - 1-10V	IP20	1Z2020060
	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24
	20W(15W)	220-240V(100-127V)	24V	PUSH	IP20	1Z0240870.24
	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
	10W	110-240V	250mA	TRIAC - 1-10V	IP20	1Z2340010.250
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350




# DRIVERS

	Power	Input	Output	Dimming	Protection	Code
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	90W	100-240V	48V	1-10V	IP20	1Z1120290
	10W	110-240V	500mA	TRIAC - 1-10V	IP20	1Z2340010.500
	30W	120-277V	500mA	TRIAC - 1-10V	IP20	1Z2020050.500
	50W	120V	500mA	1-10V	IP20	1Z2000010
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500
	26,5W(26,5W)	220-240V(100-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0240530.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180
	50W(40W)	220-240V(100-127V)	700mA	DALI	IP20	1Z0241140.700

# DRIVERS



	Power	Input	Output	Dimming	Protection	Code
	12W	120-240V	250mA	TRIAC - 1-10V	IP64	1Z2330010
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	16W	100-240V	350mA	ON/OFF	IP67	1Z1120130
	150W	100-240V	48V	1-10V	IP67	1Z1120250
	320W	100-240V	48V	1-10V	IP67	1Z1120380
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	21W	100-240V	700mA	ON/OFF	IP67	1Z1120100
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170

## COMMON ACCESSORIES

	Size	Cut-out	Finish	Code
<b>Plasterboard trapdoors</b>				
	7.87"x7.87"	8.07"x8.07"	Standard	1A3780000.00.00
	15.74"x15.74"	16.34"x16.34"	Standard	1A3790000.00.00
<b>Clamp / Bloccacavo</b>				
	Ø 1.97"x0.79"		Matt White	1A3270300.00.00
			Matt Black	1A3270400.00.00

# SUSPENSION KITS

## Recessed suspension kit

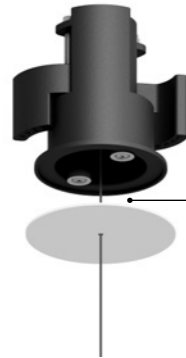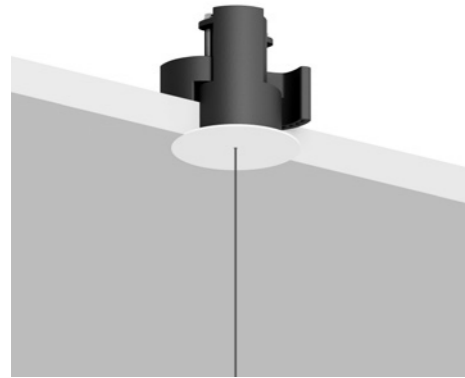

Suspension kit for 0.49" plasterboard  
Plasterboard cut-out Ø 1.73"  
Minimum space for mounting 2,76"


Magnetic fixing  
Fissaggio magnetico



Version	Use	Product reference	Finish	Code		
Recessed suspension kit.01	For suspension cables	REFLEX S 1	Matt White	1X0000300.01.00		
		REFLEX S 2				
		SHANGHAI 1				
		SHANGHAI 2				
		SOTTILE 1				
Recessed suspension kit.02	For electrical cables	SOTTILE 1 DE	Matt Black	1X0000400.01.00		
		SOTTILE 2				
		SOTTILE 2 DE				
		MAGIA			Matt White	1X0000300.02.00
		MAGIA			Matt Black	1X0000400.02.00
Recessed suspension kit.03	For suspension cables	MASAI 1	Matt White	1X0000300.03.00		
		MASAI 2	Matt Black	1X0000400.03.00		
Recessed suspension kit.04	For electrical cables	ASINTOTO	Matt White	1X0000300.04.00		
		REFLEX S 2	Matt Black	1X0000400.04.00		
		SHANGHAI 2				
Recessed suspension kit.05	For electrical cables	SOTTILE 2	Matt White	1X0000300.05.00		
		SOTTILE 2 DE			Matt Black	1X0000400.05.00

# SUSPENSION KITS

## Ceiling suspension kit

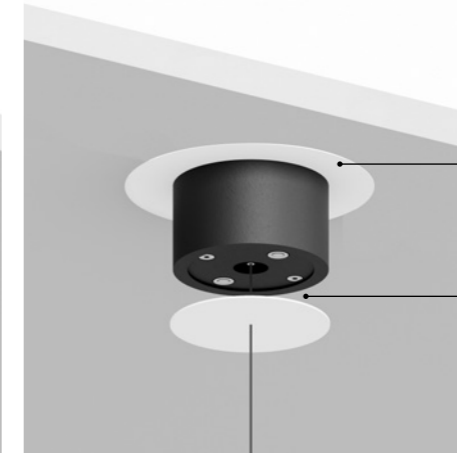


Back plate for masonry ceilings

Magnetic fixing



Version	Use	Product reference	Finish	Code		
Ceiling suspension kit.01	For suspension cables	REFLEX S 1	Matt White	1X0010300.01.00		
		REFLEX S 2				
		SHANGHAI 1				
		SHANGHAI 2				
		SOTTILE 1				
Ceiling suspension kit.02	For electrical cables	SOTTILE 1 DE	Matt Black	1X0010400.01.00		
		SOTTILE 2				
		SOTTILE 2 DE				
		MAGIA			Matt White	1X0010300.02.00
		MAGIA			Matt Black	1X0010400.02.00
Ceiling suspension kit.03	For suspension cables	MASAI 1	Matt White	1X0010300.03.00		
		MASAI 2	Matt Black	1X0010400.03.00		
Ceiling suspension kit.04	For electrical cables	ASINTOTO	Matt White	1X0010300.04.00		
		REFLEX S 2	Matt Black	1X0010400.04.00		
		SHANGHAI 2				
Back plate	For masonry ceilings	SOTTILE 2	Matt White	1X0050300.01.00		
		SOTTILE 2 DE				



## CERTIFICATIONS

cETLus certification / cULus certification / Title 24 Compliant

ANIMA  
BELLADINOTTE  
BINARIO TRIFASE  
BUBKA  
BUBKA BOLLARD  
BUCO 58  
CATHODE 1  
DOT P 51  
DOT PL 51  
FLASH 6  
FLASH 12  
GRILLO  
INFINITO 6  
INFINITO 12  
MASAI 1  
MINI PL 51  
MIRA  
MIRA R  
MIRA SWITCH  
MISS 1  
MISS 2  
MOON 60  
MOON 60 DE  
MOON 80  
MOON 120  
MOON 200

MOON T  
NEURO  
NEURO OUTDOOR  
NULLA  
NULLA 18  
NULLA 25  
NULLA 25 T24  
OHM SPOT  
ORIGINE 290  
ORIGINE 390  
ORIGINE 490  
ORIGINE OUTDOOR  
OUT 44  
OUT 58  
OUT 100  
OZEN  
OZEN VETRO  
PIÙ  
QUAD  
SAMPEI 230  
SAMPEI 260  
SAMPEI 290  
SAMPEI 440  
SAMPEI 440 OUTDOOR  
SIMBIOSI  
TOAST

**davidegroppi.com**

**Davide Groppi s.r.l.**  
Via Belizzi 20 / 22  
29122 Piacenza - Italia  
+39.0523.571590  
info@davidegroppi.com

Davide Groppi s.r.l. © 2024  
Company with sole shareholder under the direction and coordination of Dexelance